


形名	EL-WVE1708C/H	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDA4L-G-E17/40/S-PS					
最大 取付 間隔	高さ	H					
	A-A'	1.6 H					
	B-B'	1.8 H					
器具効率		上方光束	下方光束	計			
		19.6%	32.7%	52.4%			
保守率		良い	0.680	普通	0.660	悪い	0.630

○配光曲線図 (cd/1000lm)

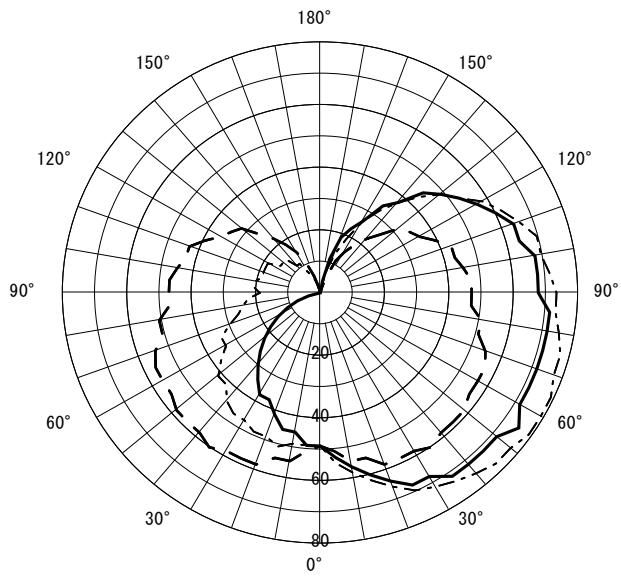

○直射水平面照度 (全光束 : 440 × 1 = 440lm/台)

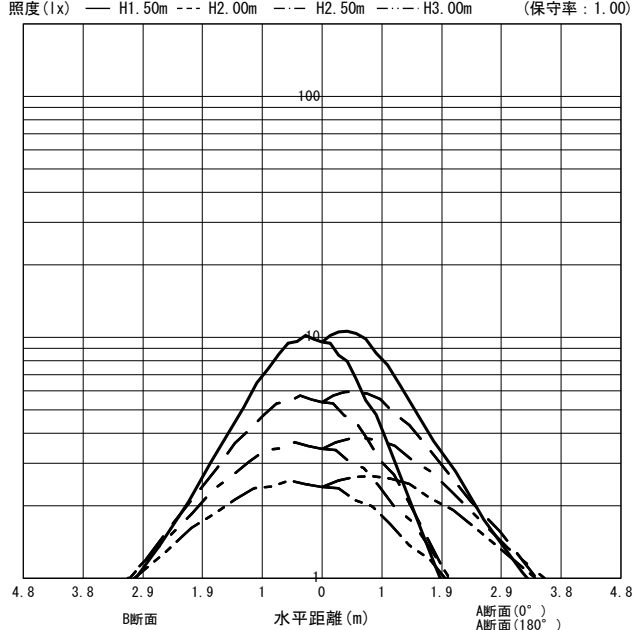

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	27	24	19	18	14	14	11	11	24	23	17	17	13	13	10	10	21	19	15	15	11	11	9	9	17	17	13	13	10	10	8	8	7	5								
0.80	32	29	24	22	19	18	15	15	29	27	22	21	18	17	14	14	25	23	19	18	15	15	13	12	21	20	16	16	13	13	11	11	10	8								
1.00	36	32	28	26	22	21	19	18	33	30	26	24	21	20	17	17	28	26	22	21	18	18	15	15	23	22	19	18	16	15	13	13	12	10								
1.25	39	35	32	29	26	25	22	21	36	33	30	27	25	23	21	20	30	28	25	24	21	21	18	18	25	24	21	21	18	18	16	16	15	12								
1.50	42	37	35	32	30	27	25	24	39	35	32	30	28	26	24	23	33	30	28	26	24	23	21	20	27	26	23	22	20	20	18	18	16	13								
2.00	46	40	40	35	34	31	30	28	42	38	37	33	32	30	28	27	36	32	31	29	28	26	25	24	30	28	26	25	24	23	21	21	19	16								
2.50	49	42	43	38	38	34	34	31	45	39	40	36	35	32	32	30	38	34	34	31	30	29	28	26	31	29	28	27	26	25	24	23	21	18								
3.00	51	44	45	40	41	36	37	34	47	41	42	37	38	34	35	32	39	36	36	33	33	30	30	28	33	31	30	29	28	27	26	25	23	19								
4.00	53	45	49	42	45	39	41	37	49	43	45	40	42	37	39	35	41	37	38	35	36	33	33	31	34	32	32	31	30	29	29	27	26	21								
5.00	55	47	51	44	48	41	44	39	51	44	47	41	44	39	41	37	43	38	40	36	38	35	36	33	36	33	34	32	32	30	30	29	27	23								
7.00	57	48	54	46	51	44	49	42	53	45	50	43	47	42	45	40	44	40	42	38	40	37	39	36	37	35	36	34	34	32	33	31	29	25								
10.00	59	49	56	48	54	46	52	45	54	46	52	45	50	44	48	42	46	41	44	40	43	39	41	38	38	36	37	35	36	34	35	33	31	27								

JIS C 8030:2014

三菱電機照明株式会社