



FB45122E

L4352W

PN




配光曲線図 (cd/1000lm)

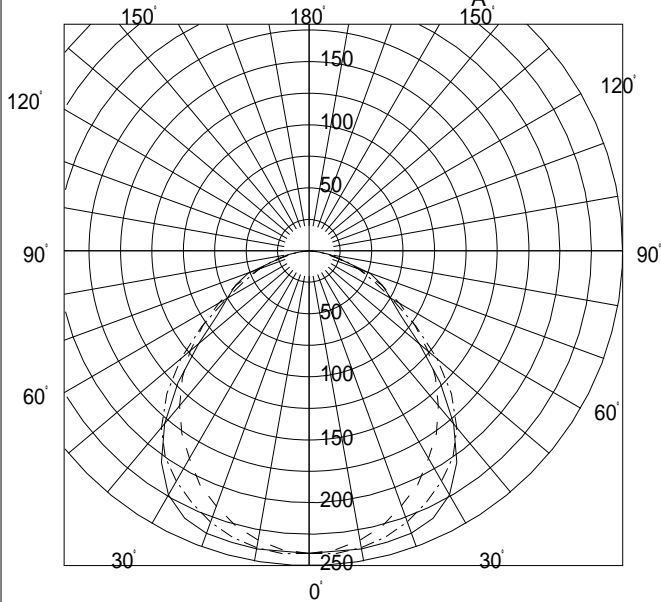

諸特性

光源		FHF32EX-N			
最大取付間隔		A-A 1.40H		B-B 1.60H	
器具 効率	上方光束	0.0%			
	下方光束	61.7%			
	計	61.7%			
保守率		良	0.740	中	0.700 否 0.620

直射水平面照度

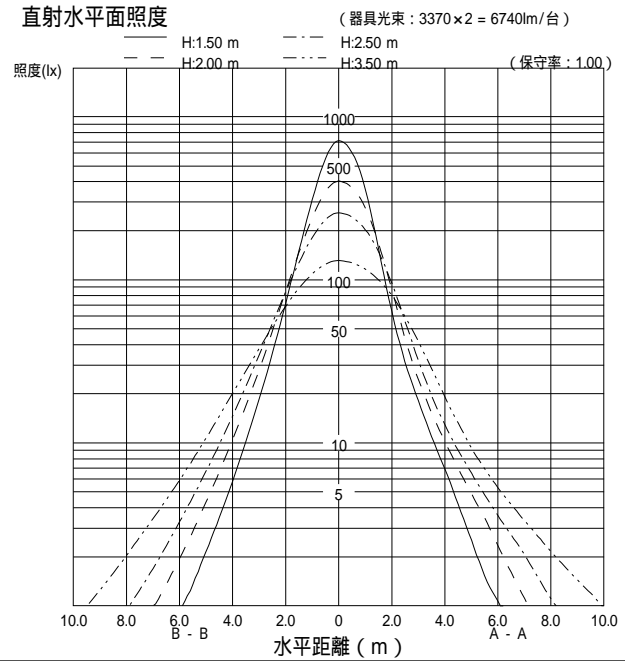

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	29	40	46	52	57	60	65	68	70	72	74	76	77	
		10	27	37	42	47	51	53	56	58	60	61	62	64	65	
	50	30	21	32	38	43	49	53	58	62	65	68	71	73	75	
		10	20	30	35	40	45	48	52	55	57	59	61	62	63	
70	30	30	16	26	32	38	44	47	53	58	61	65	68	71	74	
		10	16	26	31	36	41	44	49	52	54	57	59	61	63	
	70	30	28	39	45	50	55	58	62	65	67	70	71	73	74	
		10	27	36	41	46	50	52	55	58	59	61	62	63	64	
50	50	30	20	31	37	43	48	52	57	61	63	66	68	71	73	
		10	20	30	35	40	45	47	51	54	56	58	60	62	63	
	30	30	16	26	32	37	43	47	52	57	59	63	66	69	71	
		10	16	25	31	36	41	44	48	52	54	56	58	60	62	
30	50	30	20	30	36	41	46	49	54	57	60	62	64	66	68	
		10	19	29	34	39	44	46	50	53	55	57	59	60	61	
	30	30	16	26	31	36	42	45	50	54	57	60	62	65	67	
		10	16	25	30	35	40	43	47	51	53	55	57	59	61	
0	30	30	16	25	30	36	41	44	49	52	54	57	59	61	63	
	10	10	13	22	27	32	37	40	45	48	50	53	55	57	59	
0	0	0	12	21	26	31	36	39	43	47	49	51	53	55	57	