



○諸特性

光源		FHF32EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.18m	2.87m	3.58m	4.29m	
	B-B	2.14m	2.69m	3.27m	3.87m	
器具効率	上方光束	下方光束		計		
	0.0%	84.7%		84.7%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

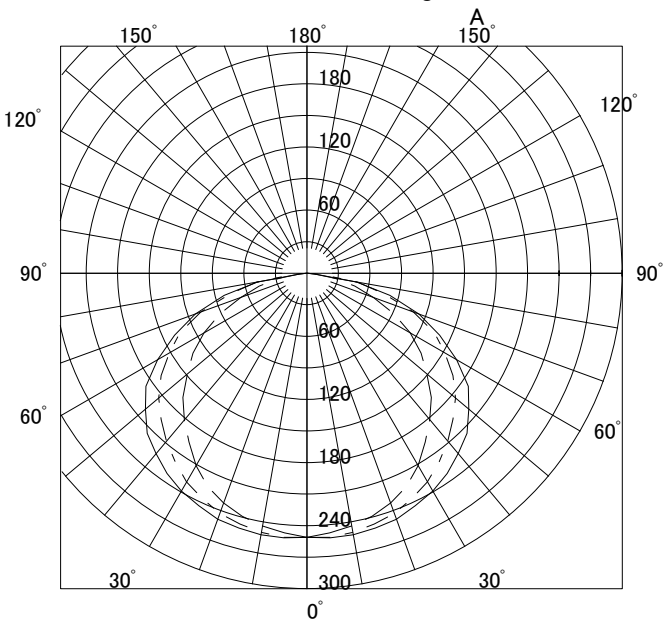

○直射水平面照度

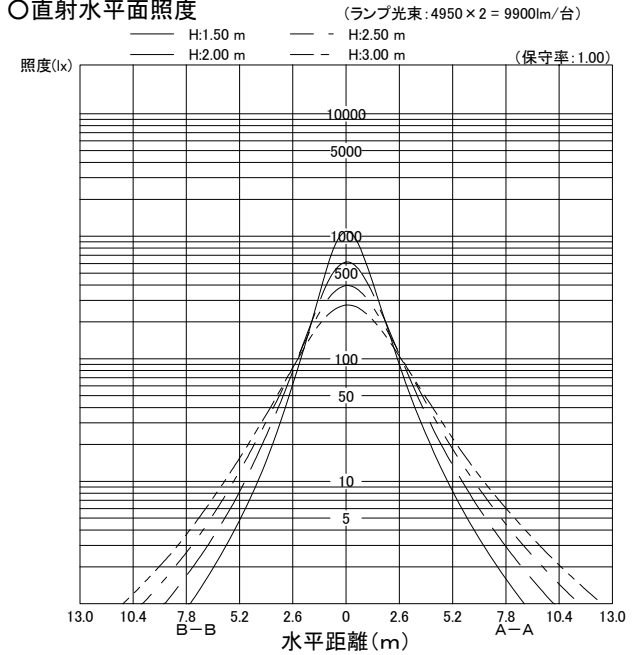

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	37	51	60	67	75	79	86	91	94	98	101	104	106
		10	35	47	54	61	66	70	75	78	81	83	85	87	89
	50	30	25	38	47	55	63	68	76	82	86	92	95	100	103
		10	24	37	44	51	58	62	68	73	76	80	82	85	87
70	30	30	19	31	39	46	54	60	69	75	80	86	91	96	100
		10	19	30	37	44	51	56	63	68	71	76	79	83	85
	10	10	15	25	32	39	46	50	58	64	68	73	76	81	84
		70	30	36	50	58	65	72	76	83	88	91	94	97	100
50	50	30	25	38	46	54	61	66	74	80	84	89	92	96	100
		10	24	36	43	50	57	61	67	72	75	79	81	84	86
	30	30	19	30	38	46	53	59	67	74	78	84	88	93	97
		10	18	30	37	43	51	55	62	67	71	75	78	82	85
30	50	30	24	36	44	51	59	63	70	76	79	84	87	90	93
		10	24	35	42	49	55	59	65	70	73	77	79	82	84
	30	30	18	30	37	44	52	57	65	70	74	80	83	88	91
		10	18	29	36	43	50	54	61	66	69	74	77	80	83
0	30	30	18	29	36	43	50	55	62	68	71	76	79	83	86
		10	14	25	31	38	45	49	56	62	65	70	73	77	80
0	0	0	13	23	29	36	43	47	54	60	63	68	71	75	78