



	FB45122E
	L4412
	VPH




○配光曲線図 (cd/1000lm)

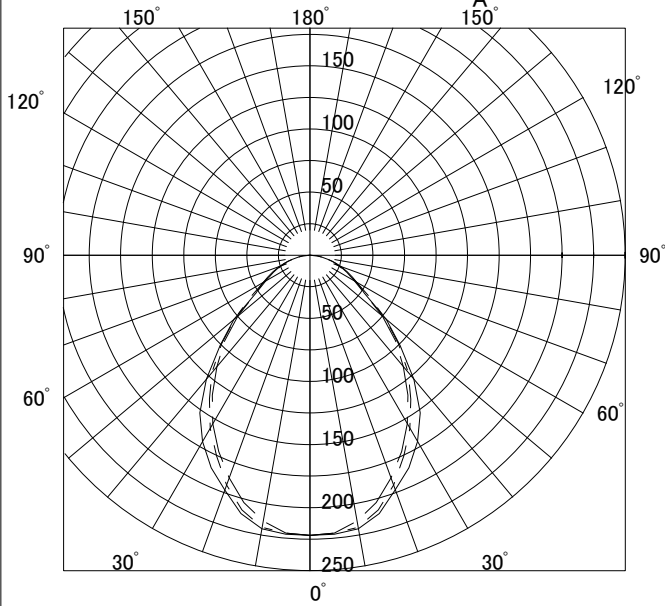

○諸特性

光源		FHF32EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.74m	2.29m	2.86m	3.42m	
	B-B	1.89m	2.31m	2.80m	3.30m	
器具効率	上方光束	下方光束		計		
	0.0%	43.3%		43.3%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○直射水平面照度

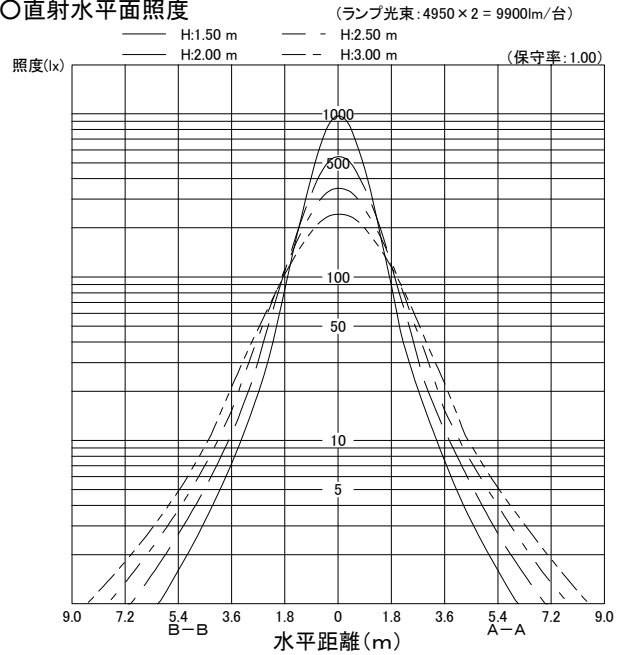

反射率(%)		作業面照明率(×0.01)													
		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	22	30	34	38	42	43	46	49	50	51	53	54	55
		10	21	28	31	34	37	38	40	42	43	44	44	45	46
	50	30	17	25	29	33	36	39	42	45	47	49	50	52	53
		10	16	23	27	30	33	35	38	40	41	42	43	44	45
70	70	30	22	30	33	37	40	42	45	47	48	50	51	52	53
		10	20	27	31	34	36	38	40	41	42	43	44	45	45
	50	30	16	24	28	32	36	38	41	44	45	47	49	50	52
		10	16	23	27	30	33	35	37	39	40	42	43	44	45
50	70	30	13	21	25	28	32	35	38	41	43	45	47	49	51
		10	13	20	24	27	31	32	35	38	39	41	42	43	44
	50	30	16	24	27	31	34	36	39	42	43	45	46	47	48
		10	15	23	26	29	32	34	37	38	39	41	42	43	44
30	70	30	13	21	24	28	32	33	37	39	41	43	45	46	48
		10	13	20	23	27	30	32	35	37	38	40	41	42	43
	30	30	13	20	24	27	31	33	36	38	39	41	42	44	45
0	70	30	13	20	23	26	30	31	34	36	38	39	40	41	42
		10	11	18	21	25	28	30	33	35	36	38	39	41	42
0	0	0	11	18	21	24	27	29	32	34	35	37	38	40	41