



	FB45122E
	L45022
	VPH




○諸特性		光源				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.99m	2.59m	3.24m	3.88m	
	B-B	1.87m	2.28m	2.76m	3.24m	
器具効率	上方光束	下方光束		計		
	0.0%	53.3%		53.3%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

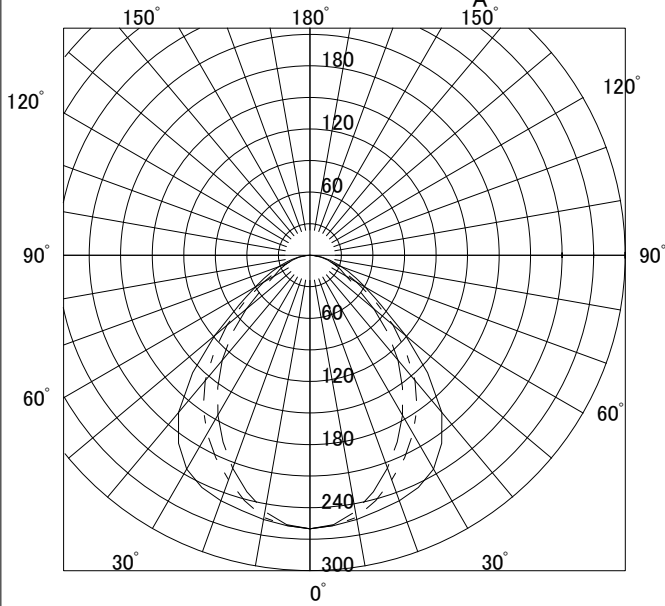

○直射水平面照度

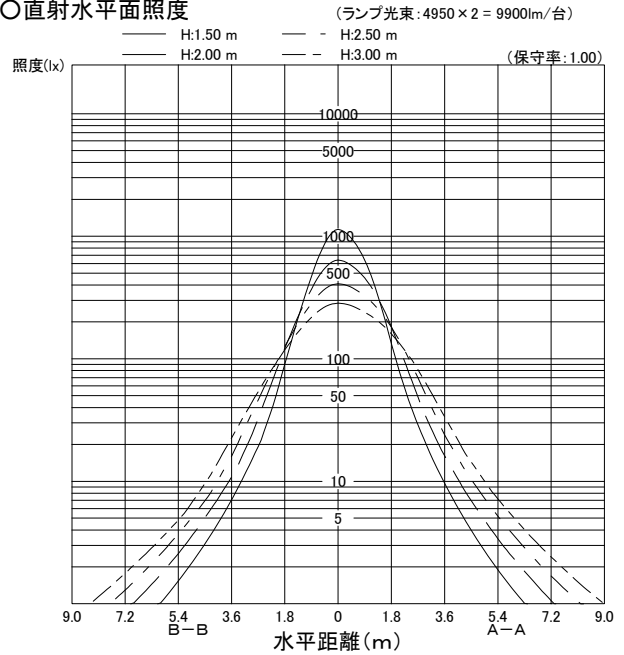

反射率(%)		作業面照明率(×0.01)													
		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	27	37	42	47	51	54	57	60	61	63	65	66	67
		10	25	34	38	42	46	47	50	52	53	54	55	56	56
	50	30	20	30	35	40	45	48	52	55	57	60	62	64	66
		10	19	29	33	37	41	43	47	49	50	52	53	55	55
70	30	30	16	26	30	35	41	43	48	52	54	57	60	62	64
		10	16	25	29	34	38	40	44	47	48	50	52	53	55
	10	10	14	22	27	31	36	38	42	45	47	49	51	52	54
		70	30	26	36	41	46	50	52	55	58	59	61	62	64
50	50	30	20	30	35	39	44	47	51	54	56	58	60	62	64
		10	19	28	33	37	41	43	46	48	50	52	53	54	55
	30	30	16	26	30	35	40	43	47	51	53	56	58	60	62
		10	16	25	29	33	38	40	44	46	48	50	51	53	54
30	10	10	14	22	26	31	35	38	42	45	46	49	50	52	53
		50	30	19	29	33	38	42	45	49	51	53	55	57	58
	30	30	16	25	30	34	39	41	46	49	51	53	55	57	58
		10	16	25	29	33	37	39	43	46	47	49	50	52	53
0	0	30	16	25	29	33	38	40	44	47	48	51	52	54	55
		10	14	22	26	31	35	37	41	44	45	47	49	50	52
0	0	0	13	21	25	29	34	36	40	42	44	46	47	49	50