



	FB45122E
	P4402
	VPH




○諸特性		FHF32EX-N-H				
最大 取付 間隔	光源	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	2.11m	2.78m	3.47m	4.14m	
	B-B	2.19m	2.73m	3.34m	3.94m	
器具効率	上方光束	0.0%	下方光束		計	
			79.8%		79.8%	
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

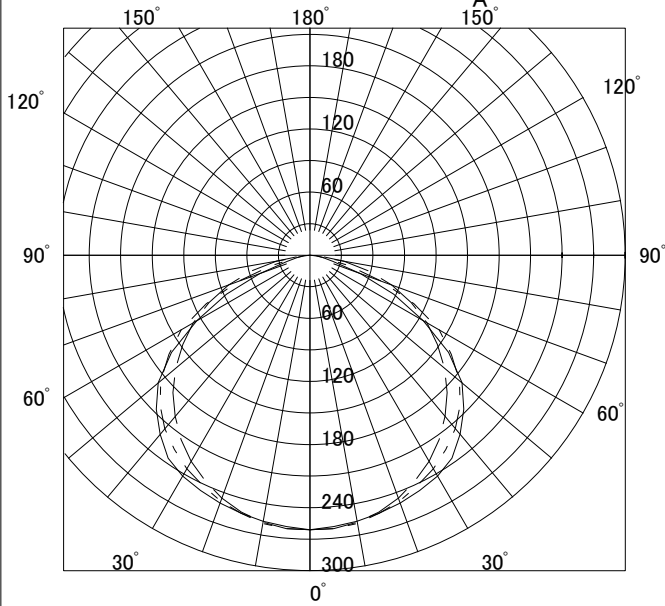

○直射水平面照度

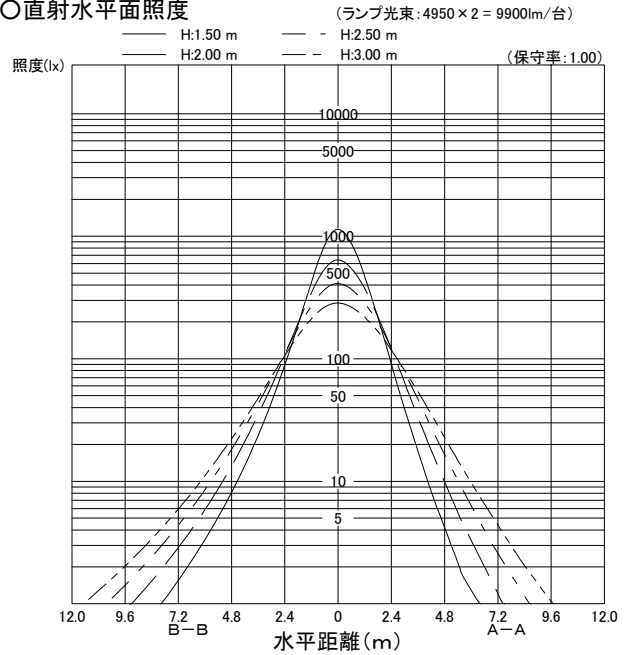

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	36	49	58	65	72	77	83	87	90	93	96	98	100
		10	33	46	53	59	64	67	72	75	77	80	81	83	84
	50	30	25	38	46	54	62	67	74	80	83	88	91	95	98
		10	24	36	43	50	56	60	66	70	73	76	78	81	83
70	30	30	19	31	39	46	54	59	67	73	78	83	87	92	96
		10	18	30	37	44	51	55	62	66	69	73	76	79	81
	10	10	15	25	32	39	46	50	58	63	66	71	74	77	80
		70	30	35	48	56	63	70	74	80	84	87	90	92	95
50	50	10	33	45	52	57	63	66	71	74	76	78	80	82	83
		30	24	37	45	53	60	65	72	77	81	85	88	92	94
	30	10	24	35	43	49	56	60	65	70	72	75	77	80	82
		30	19	30	38	45	53	58	66	72	76	81	85	89	92
30	10	10	18	30	37	43	50	54	61	66	69	73	75	78	80
		10	15	25	32	39	46	50	57	62	66	70	73	77	79
	50	30	24	36	44	51	58	62	69	73	76	80	83	86	88
		10	23	35	42	48	54	58	64	68	70	74	76	78	80
0	30	30	18	30	37	44	52	56	64	69	72	77	80	84	87
		10	18	29	36	43	49	54	60	65	67	71	74	77	79
	10	10	15	25	32	38	45	49	56	61	64	68	71	74	76
		10	15	25	32	38	45	49	56	61	64	68	71	74	76
0	0	0	13	24	30	37	43	47	54	59	62	66	69	72	74