



FB45122E

D4102

VPJ




配光曲線図 (cd/1000lm)

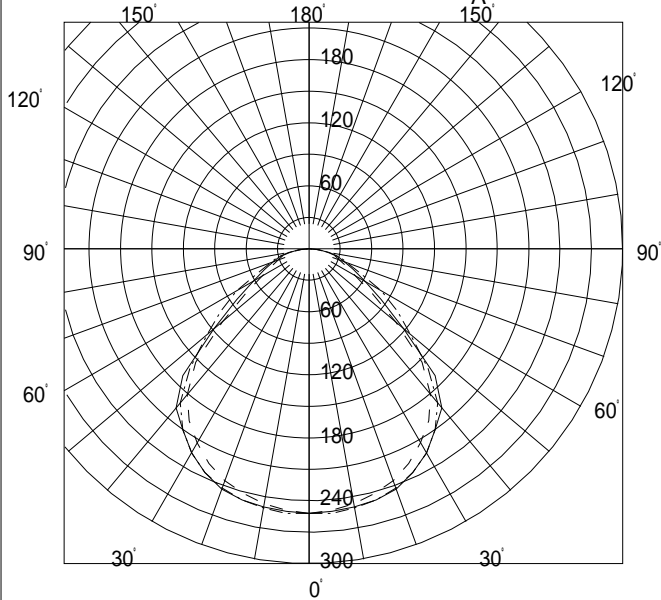

諸特性

光源		FHF32EX-N-H			
最大取付間隔		A-A 1.37H		B-B 1.62H	
器具 効率	上方光束	0.0%			
	下方光束	62.5%			
	計	62.5%			
保守率		良	0.690	中	0.650 否 0.610

直射水平面照度

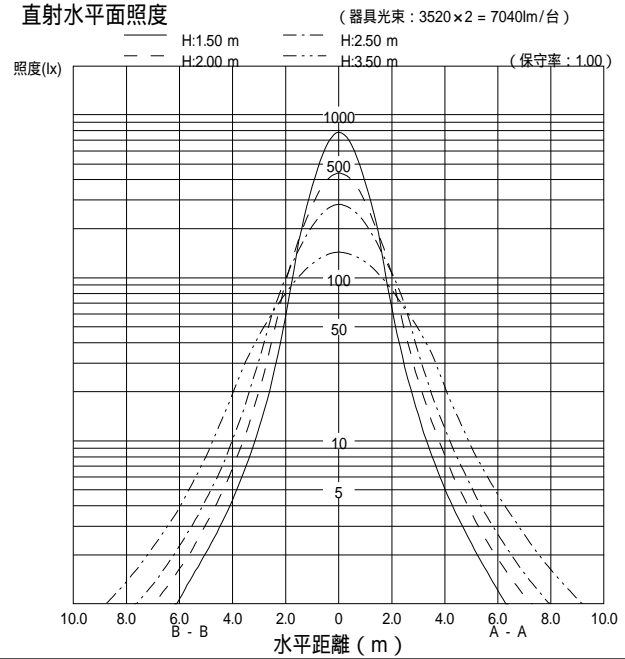

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	30	41	48	53	58	61	66	69	71	73	75	77	78
		10	28	38	43	48	52	54	57	59	61	62	63	64	65
	50	30	22	33	39	45	51	54	60	63	66	69	72	74	76
		10	21	31	37	42	47	49	53	56	58	60	61	63	64
70	30	30	17	28	33	39	45	49	55	59	62	66	69	72	74
		10	17	27	32	37	42	45	50	53	55	58	60	62	63
	10	10	14	24	29	34	39	42	47	51	53	56	58	60	62
		70	30	29	40	46	52	57	59	64	67	68	71	72	74
50		10	27	37	42	47	51	53	56	59	60	61	62	64	64
	50	30	21	32	38	44	50	53	58	62	64	67	69	72	74
		10	21	31	36	41	46	49	53	55	57	59	61	62	63
	30	30	17	28	33	39	45	48	54	58	60	64	67	70	72
30		10	17	27	32	37	42	45	49	53	55	57	59	61	63
	10	10	14	24	29	34	39	42	47	50	52	55	57	60	62
	50	30	21	32	37	42	48	51	55	59	61	63	65	67	69
		10	20	30	35	40	45	47	51	54	56	58	59	61	62
0	30	30	17	27	32	38	43	46	52	55	58	61	63	66	68
		10	17	26	31	36	42	44	49	52	54	56	58	60	61
	10	10	14	24	29	34	39	42	46	50	52	55	57	59	61
30	30	17	27	32	37	42	45	50	53	55	58	60	62	64	
	10	16	26	31	36	41	44	48	51	53	55	57	59	60	
10	10	14	24	28	33	39	41	46	49	51	54	56	58	59	
0	0	0	13	22	27	32	37	40	44	48	50	52	54	56	58