


FB45122E

P4402

VPJ




配光曲線図 (cd/1000lm)

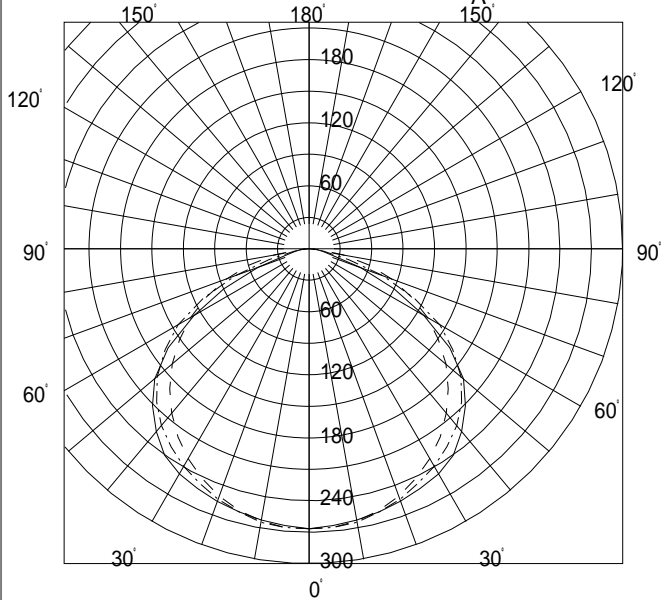

諸特性

光源		FHF32EX-N-H			
最大取付間隔		A-A		B-B	
		1.45H		1.69H	
器具 効率	上方光束	0.0%			
	下方光束	81.4%			
	計	81.4%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

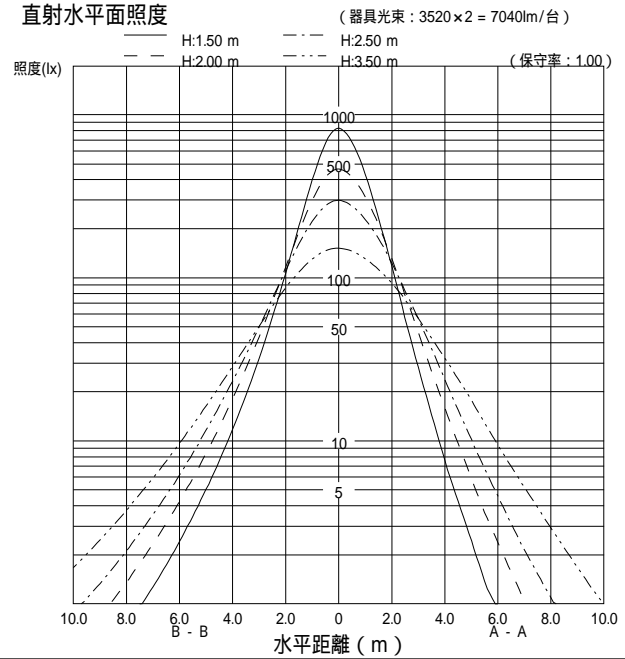

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	36	50	59	66	73	78	84	88	91	95	97	100	102
		10	34	46	53	59	65	68	73	76	78	81	82	84	85
	50	30	25	38	47	54	62	67	75	81	84	89	93	96	99
		10	24	36	44	50	57	61	67	71	74	77	79	82	84
70	30	30	19	31	39	47	55	60	68	74	79	85	88	93	97
		10	18	30	37	44	51	56	62	67	70	74	77	80	82
	10	10	15	26	32	39	47	51	58	63	67	72	75	78	81
	70	30	35	49	57	64	71	75	81	85	88	91	94	96	98
50		10	33	45	52	58	64	67	72	75	77	79	81	83	84
	50	30	24	37	46	53	61	66	73	78	82	87	90	93	96
		10	24	36	43	50	56	60	66	70	73	76	79	81	83
	30	30	18	31	38	46	54	59	67	73	77	82	86	90	94
30		10	18	30	37	44	51	55	62	67	70	74	76	79	82
	10	10	14	25	32	39	46	51	58	63	66	71	74	78	80
	50	30	24	36	44	51	58	63	70	74	77	82	84	87	90
		10	23	35	42	48	55	59	65	69	71	75	77	79	81
0	30	30	18	30	38	45	52	57	64	70	73	78	81	85	88
		10	18	29	36	43	50	54	61	65	68	72	75	78	80
0	0	0	13	24	30	37	44	48	55	60	63	67	70	73	75