



FB45122E

Y4752

VPJ




配光曲線図 (cd/1000lm)

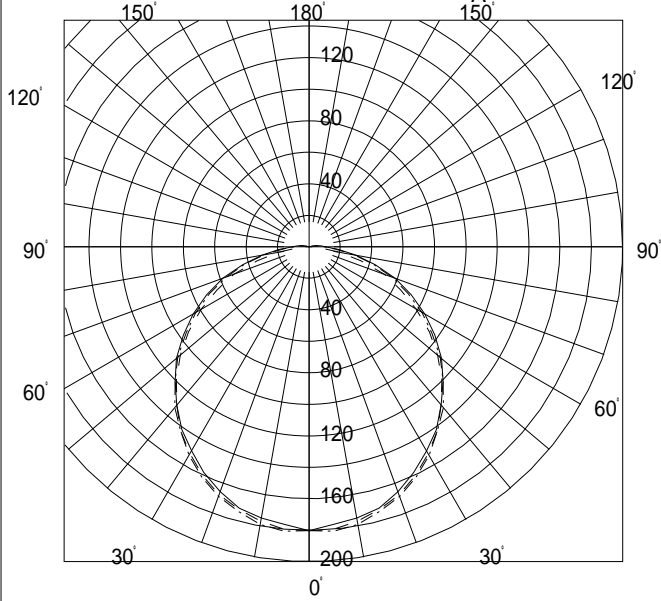

諸特性

光源		FHF32EX-N-H			
最大取付間隔		A-A		B-B	
		1.32H		1.67H	
器具 効率	上方光束	0.6%			
	下方光束	53.7%			
	計	54.3%			
保守率		良	0.690	中	0.650 否 0.610

直射水平面照度

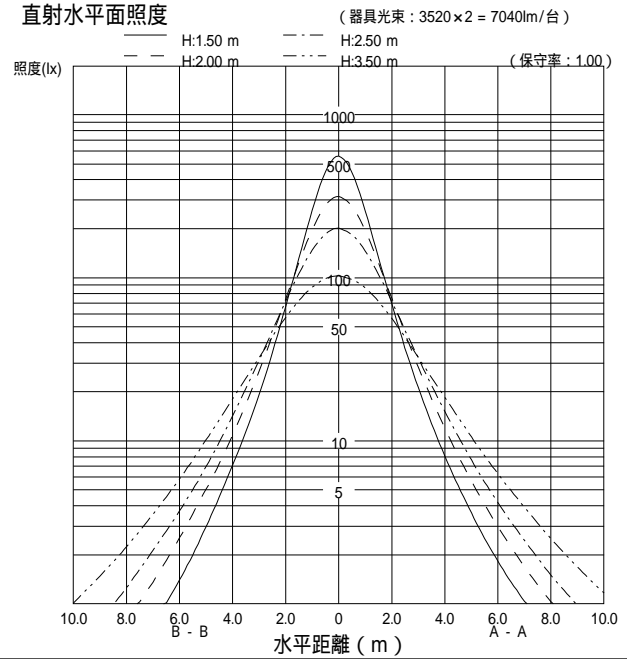

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	24	33	38	43	48	51	55	58	60	62	64	66	67
		10	22	30	35	39	42	44	48	50	51	53	54	55	56
	50	30	16	25	30	35	40	44	49	52	55	58	60	63	65
		10	16	24	28	33	37	39	43	46	48	50	52	54	55
70	30	30	12	20	25	30	35	38	44	48	51	55	57	61	63
		10	12	20	24	28	33	36	40	43	45	48	50	52	54
	10	10	10	17	21	25	30	32	37	41	43	46	48	51	53
	70	30	23	32	37	42	46	49	53	56	57	60	61	63	64
50		10	22	30	34	38	41	44	47	49	50	52	53	54	55
	50	30	16	25	30	34	39	42	47	51	53	56	58	61	63
		10	16	23	28	32	36	39	43	46	47	50	51	53	54
	30	30	12	20	25	29	34	38	43	47	49	53	56	59	61
30		10	12	19	24	28	33	35	40	43	45	48	49	52	53
	50	30	16	24	28	33	38	40	45	48	50	53	55	57	59
		10	15	23	27	31	35	38	42	44	46	48	50	52	53
	10	10	10	16	21	25	29	32	36	40	42	45	47	49	51
0	30	30	12	19	24	28	32	35	39	43	45	48	50	52	54
		10	12	19	23	27	31	34	38	41	43	45	47	49	51
0	0	0	9	15	20	25	29	31	36	39	41	44	46	48	50
0	0	0	9	15	19	23	28	30	34	38	40	42	44	47	48