



FB45122E

L4412

VPK




配光曲線図 (cd/1000lm)

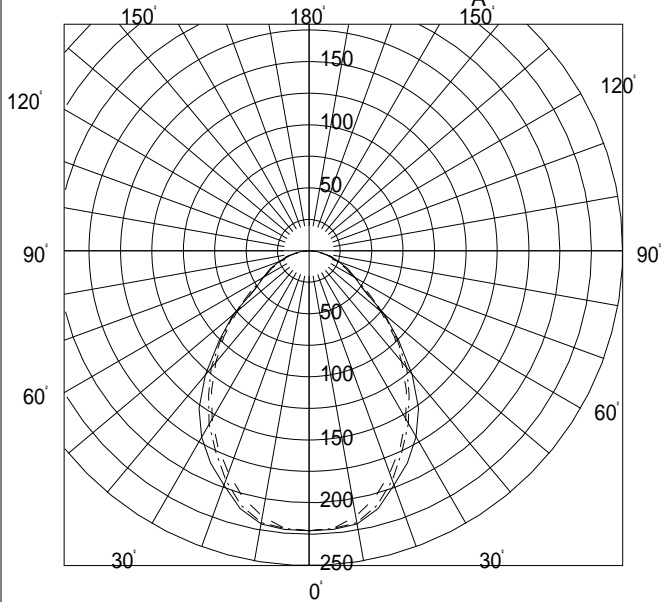

諸特性

光源		FHF32EX-N-H					
最大取付間隔		A-A			B-B		
		1.19H			1.52H		
器具効率	上方光束	0.0%					
	下方光束	43.3%					
	計	43.3%					
保守率		良い	0.730	普通	0.690	悪い	0.610

直射水平面照度

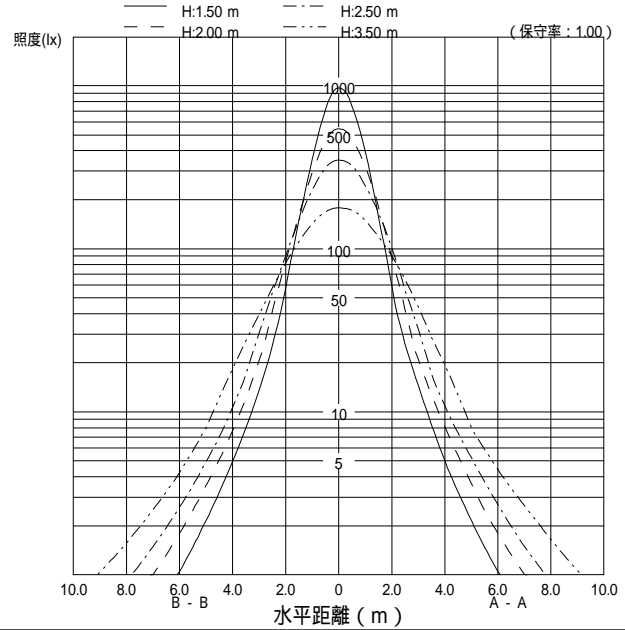

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	22	30	34	38	41	43	46	48	49	51	52	53	54	
		10	20	27	31	34	36	38	40	41	42	43	44	45	45	
	50	30	16	24	28	32	36	38	42	44	46	48	50	52	53	
		10	15	23	26	30	33	35	37	39	40	42	43	44	45	
70	30	30	13	21	24	28	32	35	38	41	43	46	48	50	52	
		10	13	20	23	27	30	32	35	37	39	40	42	43	44	
	10	10	11	18	21	25	28	30	33	36	37	39	41	42	43	
		70	30	21	29	33	36	40	42	44	46	48	49	50	51	52
50		10	20	27	30	33	36	37	39	41	42	43	43	44	45	
	50	30	16	24	28	31	35	37	41	43	45	47	48	50	51	
		10	15	23	26	29	33	34	37	39	40	41	42	43	44	
	30	30	13	20	24	28	32	34	38	41	42	45	47	49	50	
30		10	13	20	23	27	30	32	35	37	38	40	41	43	44	
	10	10	11	18	21	25	28	30	33	35	37	39	40	42	43	
	50	30	15	23	27	30	34	36	39	41	42	44	45	47	48	
		10	15	22	25	29	32	33	36	38	39	40	41	42	43	
0	30	30	13	20	23	27	30	32	35	37	39	41	42	43	44	
	10	10	12	19	23	26	29	31	34	36	37	39	40	41	42	
0	0	0	10	17	20	23	27	29	31	34	35	37	38	39	40	