


形名	FB45122E VPN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1	B4212			
オプション2				
オプション3				
オプション4				
オプション5				




光源		FHF32EX-N-H					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	63.8%	63.8%			
保守率		良い	0.690	普通	0.650	悪い	0.610

○配光曲線図 (cd/1000lm)

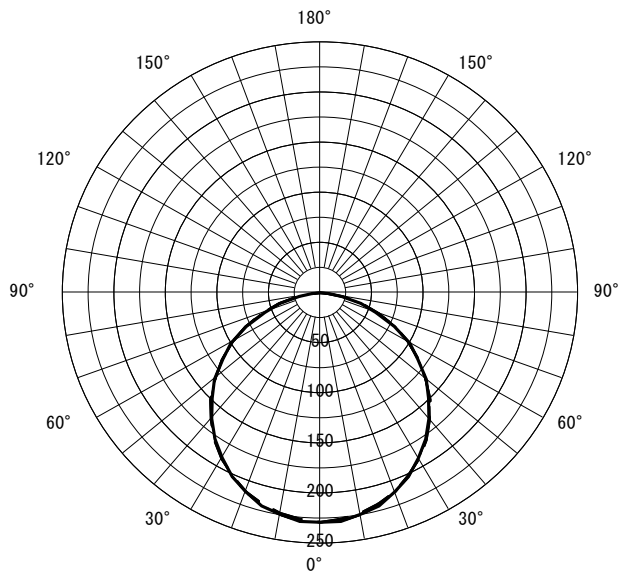

○直射水平面照度 (全光束: 3520 × 2 = 7040lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

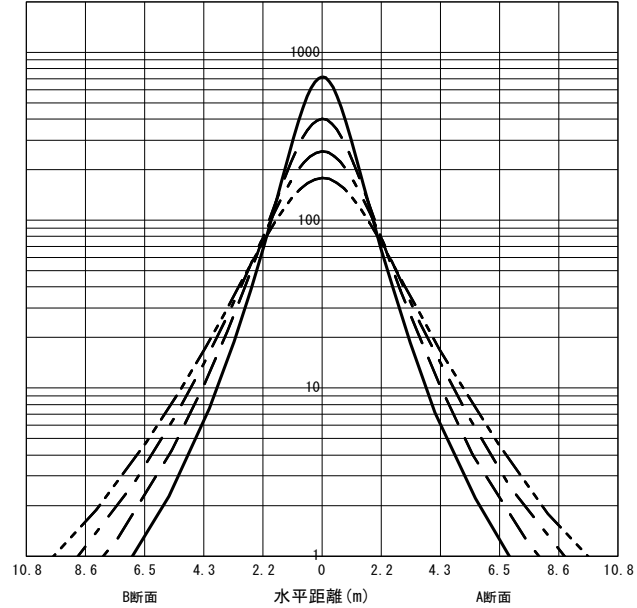

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	40	37	31	29	25	24	21	21	39	36	30	29	25	24	21	21	37	35	29	28	25	24	21	21	35	33	29	28	24	24	21	21	21	20				
0.80	48	43	39	36	33	31	28	28	46	43	38	36	32	31	28	28	44	41	37	35	32	31	28	28	42	39	35	34	31	30	28	27	27	26				
1.00	53	48	44	41	38	36	34	33	51	47	43	41	38	36	34	33	48	45	42	40	37	36	33	32	46	43	40	39	36	35	33	32	32	31				
1.25	58	52	50	46	44	41	39	38	56	51	49	45	43	41	39	37	53	49	47	44	42	40	38	37	50	47	45	43	41	40	38	37	37	35				
1.50	62	54	54	49	48	45	44	41	59	53	52	48	47	44	43	41	56	51	50	47	46	43	42	41	53	49	48	46	44	43	41	40	40	39				
2.00	66	58	60	53	54	50	50	47	64	57	58	53	53	49	49	46	60	55	55	51	51	48	48	46	56	53	53	50	49	48	47	45	45	44				
2.50	70	60	64	56	59	53	55	50	67	59	62	55	57	52	54	50	63	57	59	54	55	52	52	49	59	55	56	53	53	51	50	49	48	47				
3.00	72	62	66	58	62	55	58	53	69	61	65	57	61	55	57	52	65	59	61	56	58	54	55	52	61	57	58	55	55	53	53	51	51	49				
4.00	75	63	70	61	67	59	63	56	72	63	68	60	65	58	62	56	67	61	64	59	62	57	59	55	63	59	61	57	59	56	57	54	54	53				
5.00	76	65	73	62	70	61	67	59	74	64	70	62	68	60	65	58	69	62	66	60	64	59	62	57	64	60	62	59	61	58	59	56	56	55				
7.00	78	66	76	64	73	63	71	62	76	65	73	64	71	62	69	61	70	63	69	62	67	61	65	60	66	62	65	61	63	60	62	59	58	57				
10.00	80	67	78	66	76	65	74	64	77	66	75	65	74	64	72	63	72	65	70	64	69	63	68	62	67	63	66	62	65	62	64	61	60	59				

JIS C 8030:2014

三菱電機照明株式会社