



形名	FB45122E VP	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1	D4102			
オプション2				
オプション3				
オプション4				
オプション5				



光源		FHF32EX-N-H					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		0.0%	62.5%	62.5%			
保守率		良い	0.690	普通	0.650	悪い	0.610


○配光曲線図 (cd/1000lm)

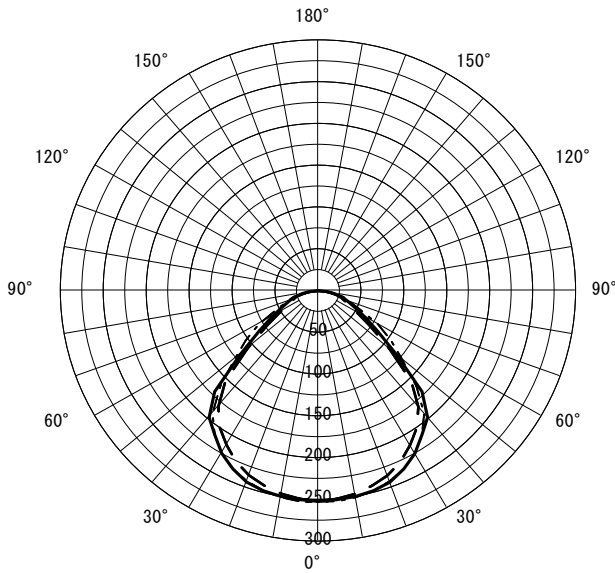

○直射水平面照度

(全光束 : 3520 × 2 = 7040lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · - H3.00m (保守率 : 1.00)

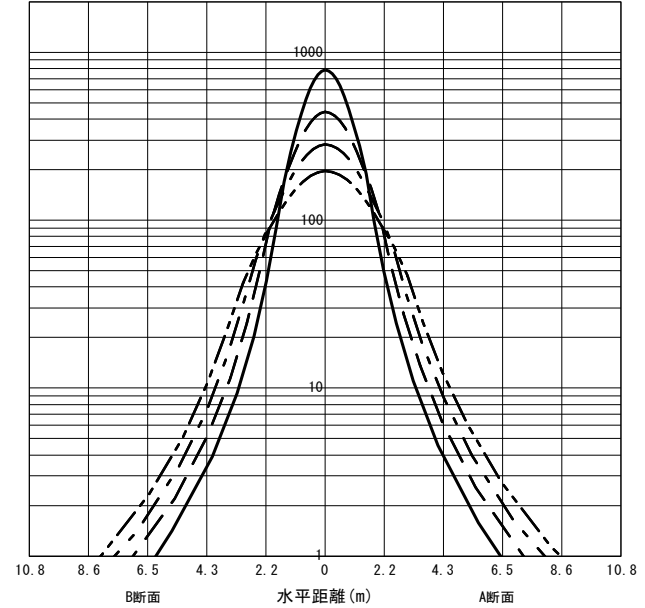

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数	作業面照明率 (× 0.01)																																	
0.60	42	38	33	31	27	27	24	24	40	38	32	31	27	27	24	24	39	36	31	30	27	26	24	23	37	35	31	30	26	26	24	23	23	22
0.80	49	45	41	38	35	34	31	31	48	44	40	38	35	34	31	31	45	42	39	37	34	33	31	30	43	41	38	36	34	33	31	30	30	29
1.00	54	49	46	43	41	39	37	35	53	48	45	42	40	38	36	35	50	46	44	42	39	38	36	35	47	45	42	41	38	37	35	35	35	34
1.25	59	52	51	47	46	43	42	40	57	51	50	47	45	43	42	40	54	50	48	46	44	42	41	40	51	48	47	45	43	42	40	39	39	38
1.50	62	55	55	50	50	46	46	43	60	54	54	49	49	46	45	43	57	52	52	48	48	45	44	43	54	50	49	47	46	45	43	42	42	41
2.00	66	58	60	54	56	51	52	48	64	57	59	53	55	50	51	48	60	55	56	52	52	49	50	47	57	54	53	51	51	49	48	47	47	45
2.50	69	60	64	56	60	54	56	51	67	59	62	56	58	53	55	51	63	57	59	55	56	52	53	50	59	56	56	53	54	51	51	50	49	48
3.00	71	61	66	58	63	56	59	53	69	60	65	58	61	55	58	53	64	59	61	56	58	54	56	52	61	57	58	55	56	53	54	52	51	50
4.00	74	63	70	60	67	58	64	57	71	62	68	60	65	58	62	56	67	60	64	58	62	57	59	55	62	59	60	57	59	56	57	55	54	53
5.00	75	64	72	62	69	60	67	59	73	63	70	61	67	60	65	58	68	61	66	60	64	58	62	57	64	60	62	59	60	57	59	56	56	55
7.00	77	65	75	64	72	62	70	61	74	64	72	63	70	62	68	60	69	63	68	61	66	60	65	59	65	61	64	60	63	59	61	58	58	57
10.00	79	66	77	65	75	64	74	63	76	65	74	64	73	63	71	62	71	63	69	63	68	62	67	61	66	62	65	61	64	61	63	60	60	58

JIS C 8030:2014

三菱電機照明株式会社