


形名	FB45122E VP	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1	L4342			
オプション2				
オプション3				




光源		FHF32EX-N-H					
最大取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.1 H					
器具効率		上方光束	下方光束	計			
		0.0%	79.1%	79.1%			
保守率		良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

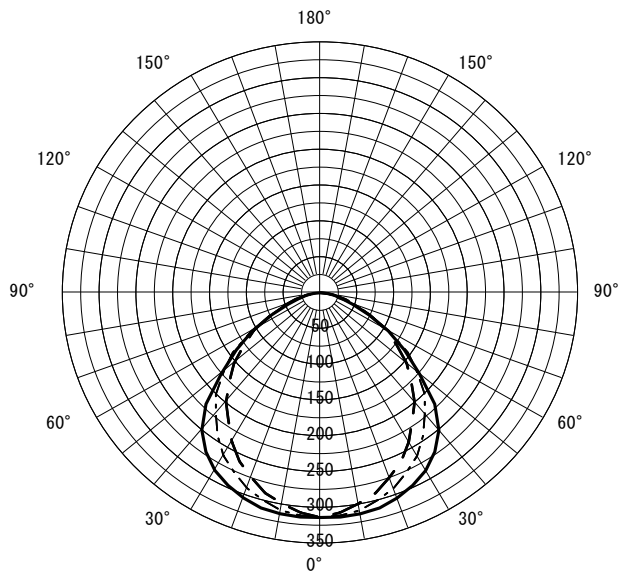

○直射水平面照度 (全光束: 3520 × 2 = 7040lm/台)

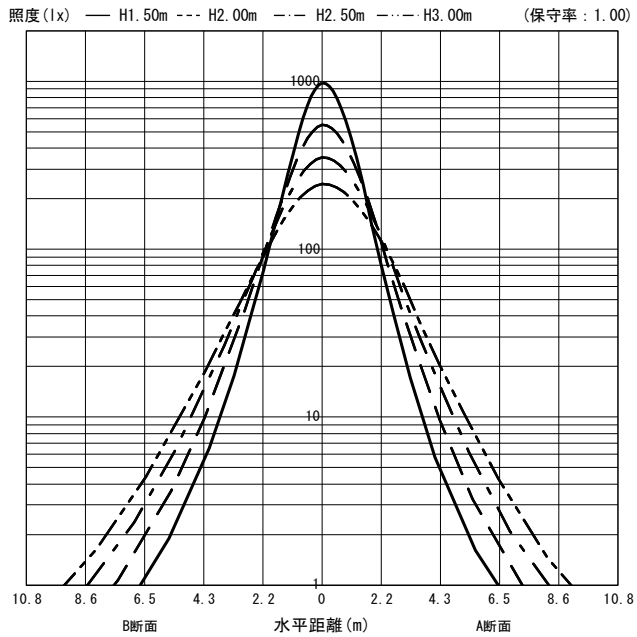

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0													
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0													
室指数	作業面照明率 (× 0.01)																																	
0.60	52	48	40	38	34	33	29	29	50	47	40	38	33	32	29	28	48	45	39	37	33	32	29	28	46	43	38	36	32	32	28	28	28	27
0.80	61	56	50	47	43	42	38	37	60	55	50	47	43	41	38	37	57	53	48	46	42	41	38	37	54	51	46	45	41	40	37	37	37	35
1.00	68	61	58	53	50	48	45	44	66	60	56	53	50	48	45	44	62	58	54	52	49	47	44	43	59	56	52	50	48	46	44	43	43	41
1.25	74	66	64	59	57	54	52	50	72	65	63	58	56	53	52	49	68	62	60	57	55	53	51	49	64	60	58	56	53	52	50	49	49	47
1.50	78	69	69	63	62	58	57	54	76	68	67	62	61	57	57	54	71	65	65	60	59	57	55	53	67	63	62	59	58	56	54	53	53	51
2.00	84	73	76	68	70	64	65	60	81	72	74	67	69	63	64	60	76	70	70	66	66	62	62	59	72	67	67	64	64	61	60	59	58	57
2.50	88	75	81	71	75	68	70	64	85	74	78	70	73	67	69	64	79	72	74	69	70	66	67	63	75	70	71	67	67	65	65	63	62	61
3.00	90	77	84	73	79	70	75	67	87	76	82	73	77	70	73	67	81	74	77	71	73	68	70	66	76	72	73	69	70	67	68	65	65	63
4.00	93	79	88	76	84	74	80	71	90	78	86	76	82	73	79	71	84	76	81	74	78	72	75	70	79	74	76	72	74	71	72	69	68	67
5.00	95	81	91	78	88	76	84	74	92	80	88	77	85	75	82	73	86	78	83	76	80	74	78	72	81	76	78	74	76	73	75	71	71	69
7.00	98	82	95	80	92	79	89	77	94	81	91	79	89	78	87	77	88	79	86	78	84	76	82	75	82	77	81	76	79	75	78	74	73	72
10.00	100	83	97	82	95	81	93	80	96	82	94	81	92	80	90	79	89	80	88	79	86	78	85	77	84	78	82	78	81	77	80	76	75	74

JIS C 8030:2014

三菱電機照明株式会社