


形名	FB45122E VPN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1	L45022			
オプション2				
オプション3				
オプション4				
オプション5				




光源		FHF32EX-N-H					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.0 H					
器具効率		上方光束	下方光束	計			
		0.0%	54.8%	54.8%			
保守率		良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

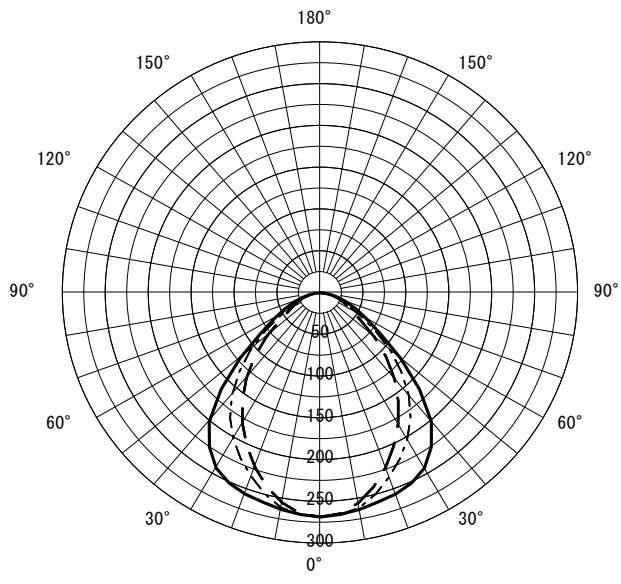

○直射水平面照度 (全光束: 3520 × 2 = 7040lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

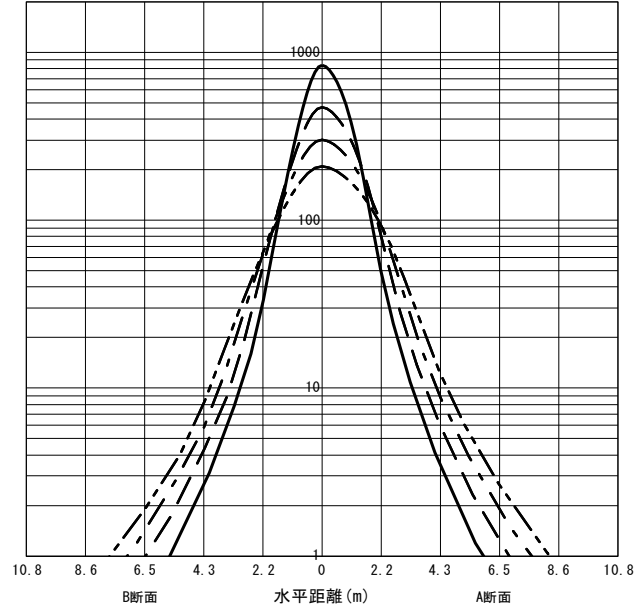

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	38	35	31	29	26	25	23	23	37	34	30	29	26	25	23	23	35	33	29	28	26	25	23	23	34	32	29	28	25	25	23	23	23	22				
0.80	45	41	37	35	33	32	30	29	43	40	37	35	33	31	29	29	41	39	36	34	32	31	29	29	40	37	35	34	31	31	29	29	28	28				
1.00	49	44	42	39	38	36	34	33	48	43	41	39	37	35	34	33	45	42	40	38	36	35	34	33	43	41	39	37	36	35	33	33	33	32				
1.25	53	47	47	43	42	39	39	37	51	46	46	42	42	39	38	37	49	45	44	41	40	39	38	37	46	43	42	41	39	38	37	36	36	35				
1.50	56	49	50	45	45	42	42	40	54	48	49	45	45	42	42	40	51	47	47	44	43	41	41	39	48	45	45	43	42	41	40	39	39	38				
2.00	59	52	54	48	50	46	47	44	57	51	53	48	49	45	46	43	54	49	50	47	47	45	45	43	51	48	48	46	46	44	44	43	42	41				
2.50	62	53	57	50	54	48	51	46	60	52	56	50	52	48	50	46	56	51	53	49	50	47	48	45	53	50	50	48	48	46	46	45	45	44				
3.00	63	54	59	52	56	50	53	48	61	53	58	51	55	49	52	48	57	52	55	50	52	49	50	47	54	51	52	49	50	48	48	47	46	45				
4.00	65	56	62	54	59	52	57	51	63	55	60	53	58	52	56	50	59	53	57	52	55	51	53	50	55	52	54	51	52	50	51	49	49	47				
5.00	67	56	64	55	62	54	59	52	64	56	62	54	60	53	58	52	60	54	58	53	57	52	55	51	56	53	55	52	54	51	53	50	50	49				
7.00	68	57	66	56	64	55	63	54	66	57	64	56	62	55	61	54	61	55	60	54	59	54	58	53	57	54	56	53	56	53	55	52	52	50				
10.00	69	58	68	57	66	56	65	56	67	57	65	57	64	56	63	55	62	56	61	55	60	55	59	54	58	55	58	54	57	54	56	53	53	52				

JIS C 8030:2014

三菱電機照明株式会社