



|        |              |    |  |      |
|--------|--------------|----|--|------|
| 形名     | FB45122E VPN | 電源 |  | ○諸特性 |
| 出力     | 固定出力         | 温度 |  |      |
| モード    |              |    |  |      |
| オプション1 | L45232       |    |  |      |
| オプション2 |              |    |  |      |
| オプション3 |              |    |  |      |


|                |      |             |       |       |       |    |       |
|----------------|------|-------------|-------|-------|-------|----|-------|
| 光源             |      | FHF32EX-N-H |       |       |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H           |       |       |       |    |       |
|                | A-A' | 1.6 H       |       |       |       |    |       |
|                | B-B' | 1.2 H       |       |       |       |    |       |
| 器具効率           |      | 上方光束        | 下方光束  | 計     |       |    |       |
|                |      | 0.0%        | 69.2% | 69.2% |       |    |       |
| 保守率            |      | 良い          | 0.730 | 普通    | 0.690 | 悪い | 0.610 |



○配光曲線図 (cd/1000lm)

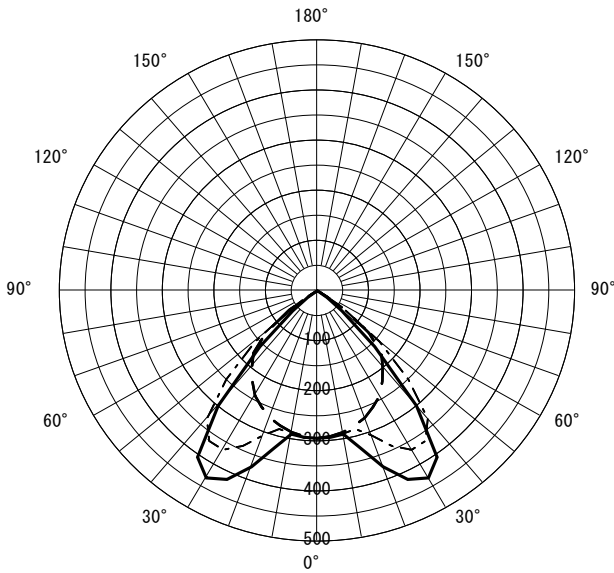

○直射水平面照度 (全光束: 3520 × 2 = 7040lm/台)

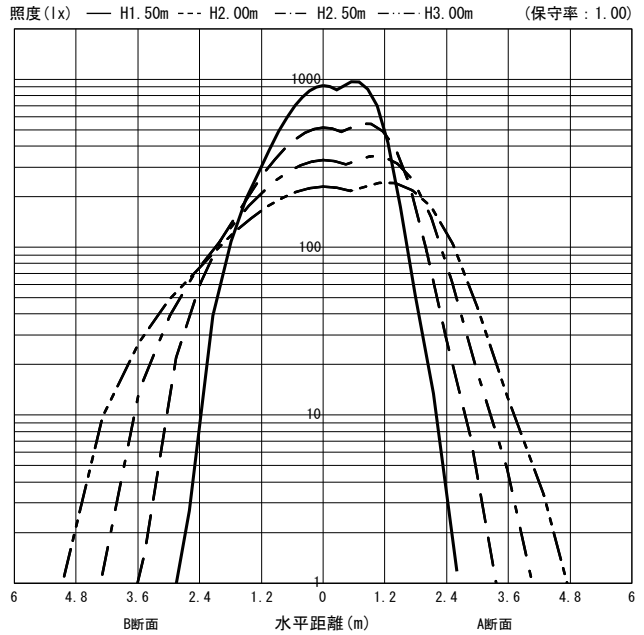

| 反射率 (%) |                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 天井      | 80             |    |    |    | 70 |    |    |    | 50 |    |    |    | 30 |    |    |    | 20 | 0  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 壁       | 70             | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |    |    |    |    |    |    |
| 床       | 30             | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0  |    |    |
| 室指数     | 作業面照度 (× 0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0.60    | 50             | 46 | 41 | 39 | 36 | 35 | 32 | 31 | 49 | 45 | 41 | 39 | 35 | 34 | 32 | 31 | 47 | 44 | 40 | 38 | 35 | 34 | 32 | 31 | 45 | 43 | 39 | 37 | 35 | 34 | 31 | 31 | 31 | 30 |
| 0.80    | 59             | 54 | 51 | 48 | 46 | 44 | 42 | 41 | 58 | 53 | 50 | 47 | 45 | 43 | 42 | 41 | 55 | 52 | 49 | 47 | 44 | 43 | 41 | 40 | 53 | 50 | 48 | 46 | 44 | 43 | 41 | 40 | 40 | 39 |
| 1.00    | 65             | 58 | 57 | 53 | 52 | 49 | 48 | 47 | 63 | 58 | 56 | 53 | 52 | 49 | 48 | 47 | 61 | 56 | 55 | 52 | 51 | 49 | 47 | 46 | 58 | 55 | 53 | 51 | 50 | 48 | 47 | 46 | 46 | 45 |
| 1.25    | 70             | 62 | 63 | 58 | 58 | 54 | 54 | 52 | 68 | 61 | 62 | 57 | 57 | 54 | 54 | 51 | 65 | 60 | 60 | 56 | 56 | 53 | 53 | 51 | 62 | 58 | 58 | 55 | 54 | 53 | 52 | 51 | 51 | 49 |
| 1.50    | 73             | 64 | 67 | 60 | 62 | 57 | 58 | 55 | 71 | 64 | 65 | 60 | 61 | 57 | 57 | 55 | 67 | 62 | 63 | 59 | 59 | 56 | 56 | 54 | 64 | 60 | 60 | 58 | 57 | 56 | 55 | 54 | 54 | 52 |
| 2.00    | 77             | 67 | 72 | 64 | 67 | 61 | 64 | 59 | 75 | 66 | 70 | 63 | 66 | 61 | 63 | 59 | 71 | 65 | 67 | 62 | 64 | 60 | 61 | 58 | 67 | 63 | 64 | 61 | 62 | 59 | 60 | 58 | 58 | 56 |
| 2.50    | 80             | 69 | 75 | 66 | 71 | 64 | 68 | 62 | 77 | 68 | 73 | 66 | 70 | 64 | 67 | 62 | 73 | 66 | 70 | 64 | 67 | 63 | 65 | 61 | 69 | 65 | 67 | 63 | 64 | 62 | 62 | 60 | 60 | 59 |
| 3.00    | 82             | 70 | 77 | 68 | 74 | 66 | 71 | 64 | 79 | 69 | 75 | 67 | 72 | 65 | 69 | 64 | 74 | 68 | 71 | 66 | 69 | 64 | 67 | 63 | 70 | 66 | 68 | 65 | 66 | 63 | 64 | 62 | 62 | 61 |
| 4.00    | 84             | 71 | 80 | 70 | 77 | 68 | 75 | 67 | 81 | 71 | 78 | 69 | 75 | 67 | 73 | 66 | 76 | 69 | 74 | 68 | 72 | 66 | 70 | 65 | 72 | 67 | 70 | 66 | 68 | 65 | 67 | 64 | 64 | 63 |
| 5.00    | 85             | 72 | 82 | 71 | 80 | 69 | 78 | 68 | 82 | 71 | 80 | 70 | 78 | 69 | 76 | 68 | 77 | 70 | 75 | 69 | 74 | 68 | 72 | 67 | 73 | 68 | 71 | 67 | 70 | 66 | 69 | 66 | 65 | 64 |
| 7.00    | 87             | 73 | 85 | 72 | 83 | 71 | 81 | 70 | 84 | 72 | 82 | 71 | 80 | 70 | 79 | 70 | 78 | 71 | 77 | 70 | 76 | 69 | 74 | 68 | 74 | 69 | 73 | 68 | 72 | 68 | 71 | 67 | 67 | 65 |
| 10.00   | 88             | 74 | 87 | 73 | 85 | 72 | 84 | 72 | 85 | 73 | 84 | 72 | 82 | 72 | 81 | 71 | 79 | 71 | 78 | 71 | 77 | 70 | 76 | 70 | 74 | 70 | 74 | 69 | 73 | 69 | 72 | 68 | 68 | 67 |

JIS C 8030:2014

三菱電機照明株式会社