



○諸特性

光源		FHF32EX-N-H(非常灯)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.23m	2.92m	3.64m	4.35m	
	B-B	2.18m	2.72m	3.33m	3.93m	
器具効率	上方光束	下方光束		計		
	0.0%	85.5%		85.5%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

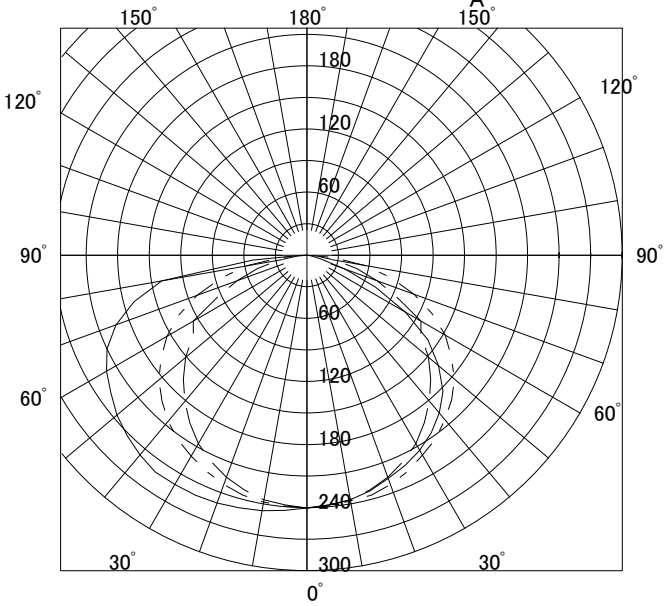

○直射水平面照度

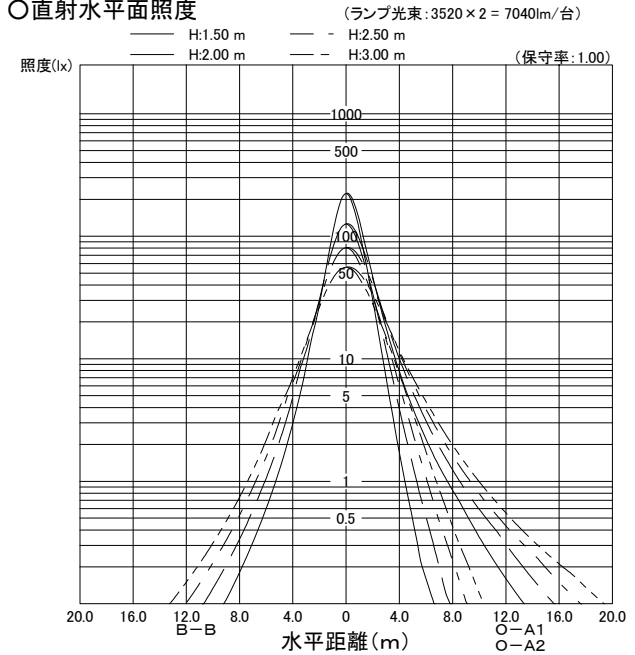

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	37	51	60	67	75	79	86	91	94	98	101	104	107
		10	35	47	54	60	66	70	75	79	81	84	85	88	89
	50	30	25	38	46	54	62	68	76	82	86	92	96	100	103
		10	24	36	44	50	57	61	68	73	76	79	82	85	87
70	30	30	18	30	38	46	54	59	68	75	79	86	91	96	101
		10	18	29	36	43	50	55	62	67	71	76	79	83	86
	10	30	14	24	31	38	45	50	57	63	67	72	76	80	84
		10	14	24	31	38	45	50	57	63	67	72	76	80	84
50	70	30	36	49	58	65	72	76	83	88	91	95	97	100	103
		10	34	46	53	59	65	68	74	77	79	82	84	86	88
	50	30	25	37	46	53	61	66	74	80	84	89	92	97	100
		10	24	36	43	50	56	61	67	72	74	78	81	84	86
30	30	18	30	37	45	53	58	67	73	78	84	88	93	97	
	10	18	29	36	43	50	54	62	67	70	75	78	82	85	
	10	14	24	31	38	45	49	57	63	66	72	75	80	83	
0	50	30	24	36	44	51	58	63	70	75	79	84	87	90	93
		10	23	35	42	48	55	59	65	70	73	76	79	82	84
	30	30	18	29	37	44	51	56	64	70	74	79	83	88	91
30	10	18	29	35	42	49	53	60	65	69	73	76	80	83	
	10	14	24	31	37	44	49	56	62	66	71	74	78	82	
30	30	18	29	36	42	50	54	62	67	71	76	79	83	86	
	10	17	28	35	41	48	52	59	64	68	72	75	78	81	
10	10	14	24	31	37	44	48	56	61	65	70	73	77	80	
0	0	0	13	22	29	35	42	46	53	59	62	67	71	74	78