



FBH4082E

VPN




配光曲線図 (cd/1000lm)

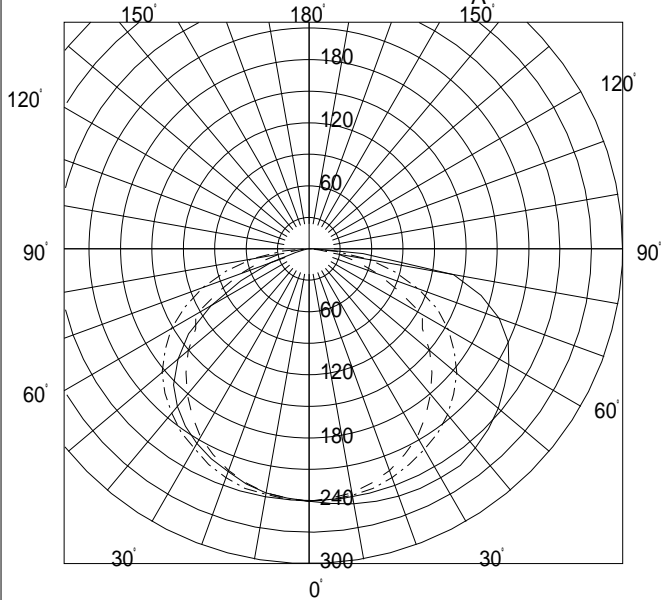

諸特性

光源		FHF32EX-N-H(非常灯)			
最大取付間隔		A-A		B-B	
		1.53H		1.68H	
器具 効率	上方光束	0.0%			
	下方光束	85.5%			
	計	85.5%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

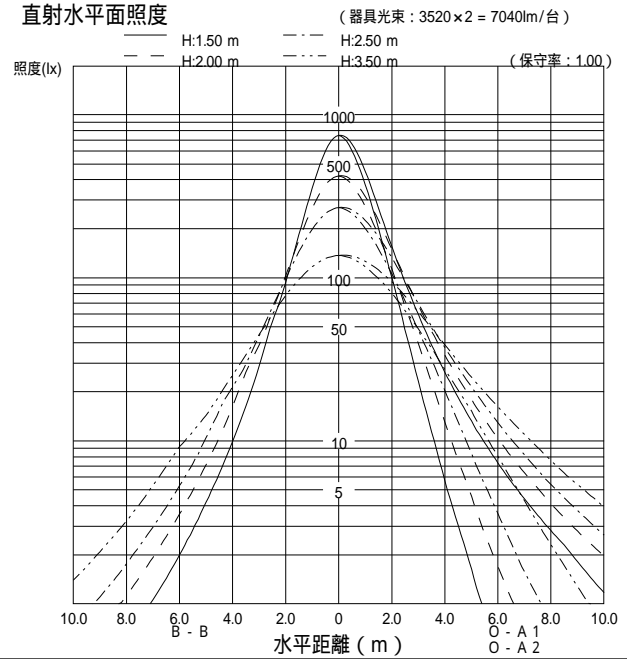

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	36	50	59	67	74	79	86	90	94	98	101	104	106	
		10	34	46	54	60	66	69	75	78	80	83	85	87	89	
	50	30	25	37	46	54	62	67	76	82	86	91	95	99	103	
		10	24	36	43	50	57	61	67	72	75	79	82	85	87	
70	30	30	18	30	37	45	53	59	68	74	79	86	90	96	100	
		10	18	29	36	43	50	54	62	67	70	75	78	82	85	
	50	30	35	49	57	64	71	76	83	87	90	94	97	100	102	
		10	33	45	52	58	64	68	73	77	79	82	84	86	87	
50	50	30	24	37	45	53	60	65	73	79	83	88	92	96	99	
		10	23	35	42	49	56	60	66	71	74	78	80	83	86	
	30	30	18	29	37	44	52	58	66	73	77	83	87	93	97	
		10	17	28	36	42	49	54	61	66	70	74	78	81	84	
30	50	30	23	35	43	50	58	62	70	75	78	83	86	90	93	
		10	23	34	41	48	54	58	65	69	72	76	78	81	84	
	30	30	18	29	36	43	51	56	63	69	73	79	83	87	91	
		10	17	28	35	42	49	53	60	65	68	73	76	80	82	
0	30	30	17	28	35	42	49	54	61	66	70	75	78	82	85	
		10	17	28	34	41	48	52	59	64	67	71	74	78	81	
0	0	0	12	22	28	35	41	46	53	58	62	67	70	74	77	