



FBH4082E

L4342

VPN




配光曲線図 (cd/1000lm)

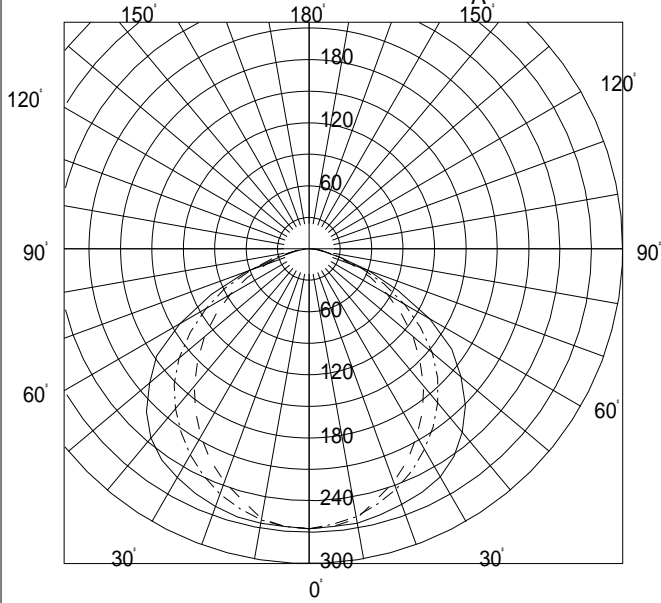

諸特性

光源		FHF32EX-N-H(非常灯)			
最大取付間隔		A-A 1.44H		B-B 1.59H	
器具 効率	上方光束	0.0%			
	下方光束	72.6%			
	計	72.7%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

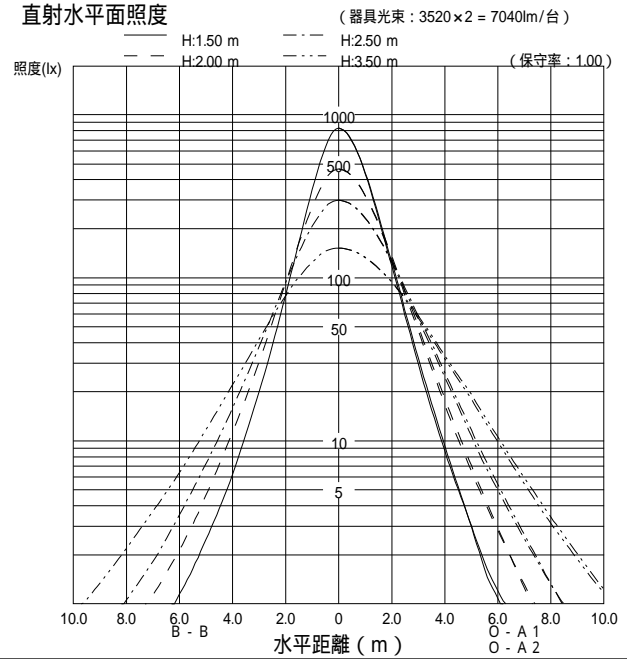

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	33	46	53	60	66	70	76	79	82	85	87	89	91
		10	31	42	49	54	59	62	66	68	70	72	73	75	76
	50	30	23	35	43	50	57	61	68	73	76	80	83	86	89
		10	22	34	40	46	52	55	61	64	66	69	71	73	75
70	30	30	18	29	36	43	50	55	62	67	71	76	79	83	87
		10	17	28	35	41	47	51	56	61	63	67	69	72	74
	10	10	14	24	30	37	43	47	53	58	60	64	67	70	72
	50	70	30	32	44	52	58	64	68	73	77	79	82	84	86
		10	30	41	47	53	58	60	65	67	69	71	72	74	75
50		30	23	35	42	49	56	60	66	71	74	78	80	83	86
		10	22	33	40	46	51	55	60	63	66	68	70	72	74
30	30	30	17	29	36	42	49	54	61	66	69	74	77	81	84
		10	17	28	34	40	47	50	56	60	63	66	68	71	73
	10	10	14	24	30	36	43	47	53	57	60	64	66	69	72
	0	50	30	22	34	41	47	53	57	63	67	70	73	75	78
		10	21	32	39	44	50	53	58	62	64	67	69	71	72
30		30	17	28	35	41	48	52	58	63	66	70	73	76	79
		10	17	28	34	40	46	49	55	59	61	65	67	69	71
0	30	30	17	28	34	40	47	50	56	60	63	67	69	72	74
		10	17	27	33	39	45	49	54	58	60	64	66	68	70
0	0	0	13	23	29	34	41	44	50	54	57	60	62	65	67