



FBH4082E

L4362

VPN




配光曲線図 (cd/1000lm)

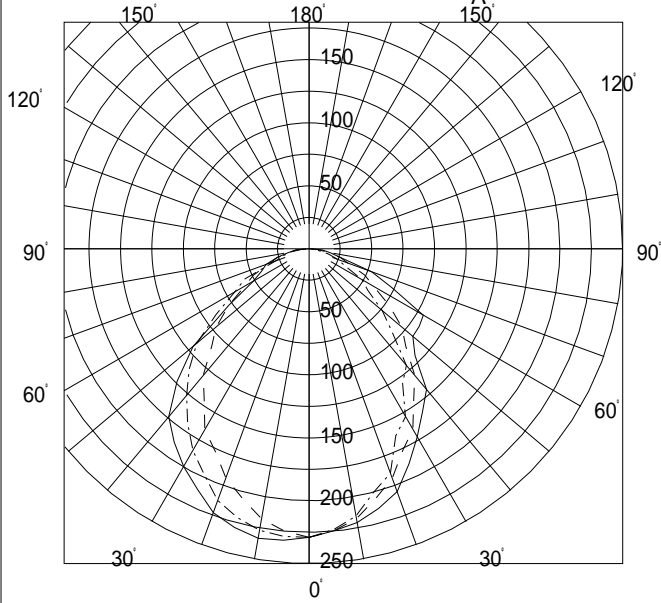

諸特性

光源		FHF32EX-N-H(非常灯)			
最大取付間隔		A-A 1.26H		B-B 1.56H	
器具 効率	上方光束	0.0%			
	下方光束	50.8%			
	計	50.8%			
保守率		良	0.690	中	0.650 否 0.610

直射水平面照度

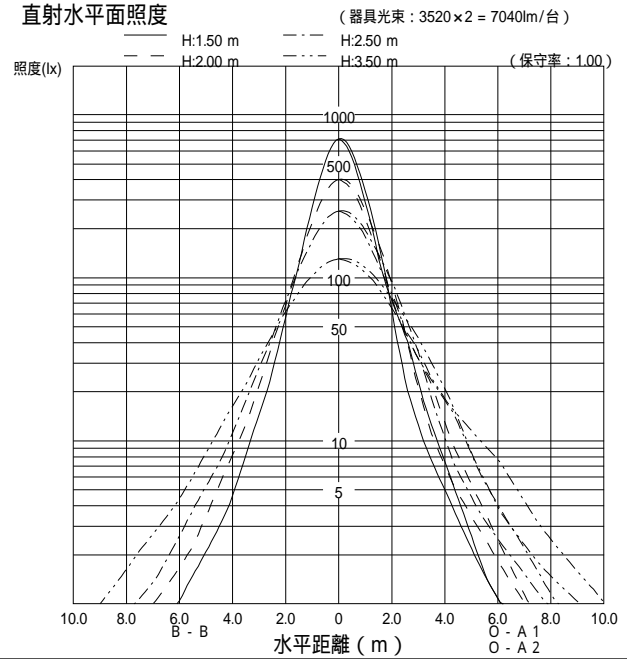

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	24	33	38	43	47	50	53	56	57	59	61	62	63
		10	23	31	35	38	42	44	46	48	49	50	51	52	53
	50	30	17	26	31	36	41	44	48	51	53	56	58	60	62
		10	17	25	29	33	37	40	43	45	47	49	50	51	52
70	30	30	14	22	27	31	36	39	44	48	50	53	56	58	60
		10	13	21	26	30	34	36	40	43	45	47	48	50	51
	70	30	23	33	37	42	46	48	51	54	55	57	59	60	61
		10	22	30	34	38	41	43	45	47	48	50	51	52	52
50	50	30	17	26	31	35	40	43	47	50	52	54	56	58	60
		10	17	25	29	33	37	39	42	45	46	48	49	51	52
	30	30	14	22	26	31	36	39	43	47	49	52	54	57	58
		10	13	21	25	30	34	36	40	43	44	46	48	50	51
30	50	30	17	25	30	34	38	41	45	47	49	51	53	55	56
		10	16	24	28	32	36	38	41	44	45	47	48	49	50
	30	30	13	22	26	30	35	37	42	45	47	49	51	53	55
		10	13	21	25	29	33	36	39	42	43	46	47	49	50
0	30	30	13	21	25	30	34	36	40	43	45	47	49	50	52
	10	10	11	19	23	27	31	33	37	40	42	44	46	48	49
0	0	0	10	18	22	26	30	32	36	38	40	42	44	46	47