



FBH4082E

L45022

VPN




配光曲線図 (cd/1000lm)

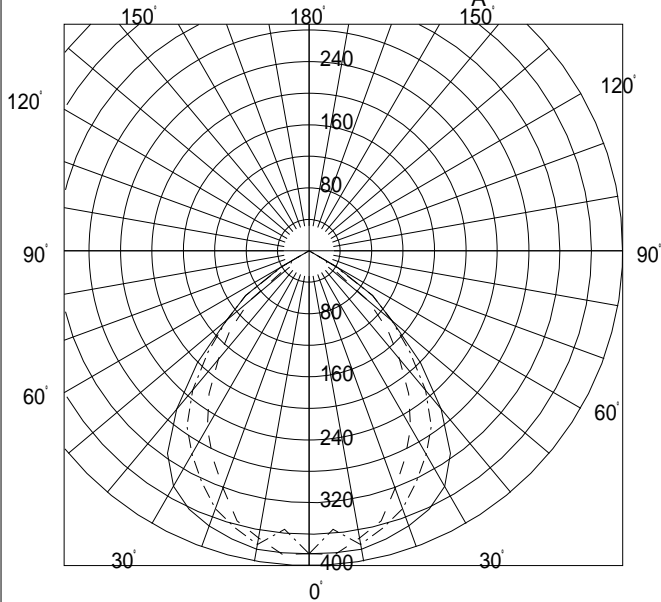

諸特性

光源		FHF32EX-N-H(非常灯)			
最大取付間隔		A-A		B-B	
		1.32H		1.48H	
器具 効率	上方光束	0.0%			
	下方光束	67.2%			
	計	67.2%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

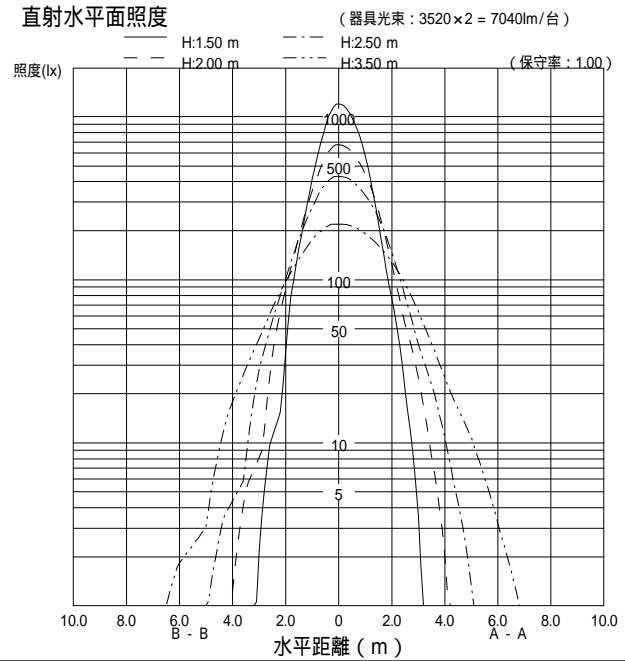

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	36	50	56	62	68	70	74	77	79	81	82	84	85
		10	34	46	51	56	60	62	65	67	68	69	69	70	71
	50	30	27	41	48	54	61	64	69	73	75	77	79	81	83
		10	27	39	45	50	56	58	62	64	65	67	68	69	70
70	30	30	23	36	43	49	56	59	65	69	71	74	77	79	81
		10	22	35	41	47	52	55	59	62	63	65	67	68	69
	70	30	35	49	55	61	66	68	72	75	76	78	79	81	82
		10	33	45	50	55	59	61	64	66	67	68	69	69	70
50	50	30	27	41	47	54	60	63	67	71	73	75	77	79	80
		10	26	39	45	50	55	57	61	63	65	66	67	68	69
	30	30	23	36	42	49	55	58	63	67	69	72	75	77	79
		10	22	35	41	46	52	54	58	61	63	65	66	67	68
30	50	30	27	40	46	52	58	60	64	67	69	71	72	74	75
		10	26	38	44	49	54	56	60	62	63	65	66	67	68
	30	30	23	36	42	48	54	57	61	65	66	69	71	72	74
		10	22	35	40	46	51	54	58	61	62	64	65	66	67
0	30	30	22	35	41	47	52	55	59	62	64	66	67	69	70
		10	22	35	40	45	51	53	57	60	61	63	64	65	66
0	0	0	19	31	36	42	48	50	54	57	58	60	61	63	63