



FBH4082E

L4522

VPN




配光曲線図 (cd/1000lm)

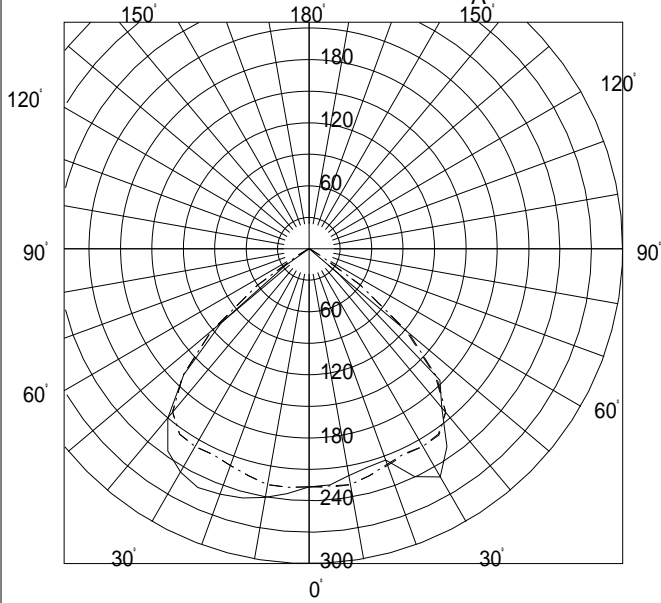

諸特性

光源		FHF32EX-N-H(非常灯)			
最大取付間隔		A-A 1.50H		B-B 1.70H	
器具 効率	上方光束	0.0%			
	下方光束	50.3%			
	計	50.3%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

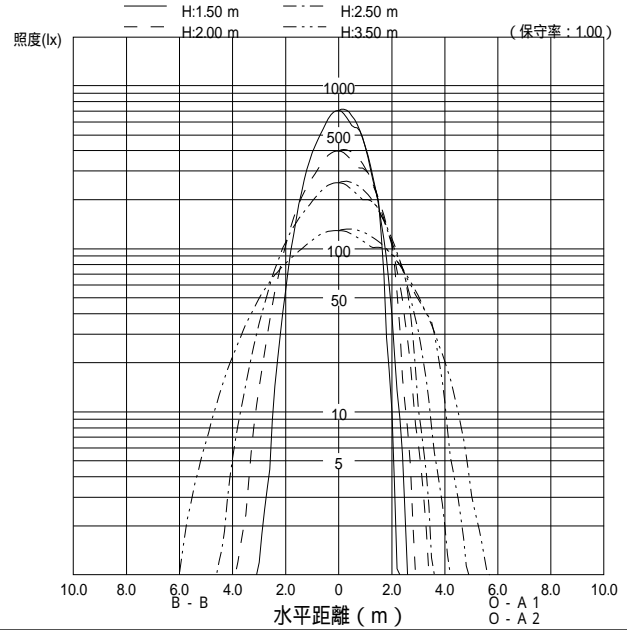

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	26	36	41	46	50	52	55	58	59	60	61	62	63
		10	24	33	38	41	44	46	48	50	50	51	52	52	53
	50	30	20	30	35	40	45	47	51	54	56	58	59	61	62
		10	19	28	33	37	41	43	46	48	49	50	51	51	52
70	30	30	16	26	31	36	41	44	48	51	53	55	57	59	60
		10	16	25	30	34	39	41	44	46	47	49	50	51	51
	70	30	25	35	40	45	49	51	54	56	57	58	59	60	61
		10	24	33	37	41	44	45	48	49	50	51	51	52	52
50	50	30	19	29	35	39	44	46	50	53	54	56	57	59	60
		10	19	28	33	37	41	43	45	47	48	49	50	51	51
	30	30	16	26	31	36	41	43	47	50	52	54	55	57	59
		10	16	25	30	34	38	40	43	46	47	48	49	50	51
30	50	30	19	29	34	38	42	45	48	50	51	53	54	55	56
		10	18	28	32	36	40	42	44	46	47	48	49	50	50
	30	30	16	25	30	35	40	42	45	48	49	51	52	54	55
		10	16	25	29	34	38	40	43	45	46	47	48	49	50
0	30	30	16	25	30	34	39	41	44	46	47	49	50	51	52
	10	10	15	25	29	33	37	39	42	44	45	47	47	48	49
0	0	0	13	22	26	31	35	37	40	42	43	45	45	46	47