



FBH4082E

P4402

VPN




配光曲線図 (cd/1000lm)

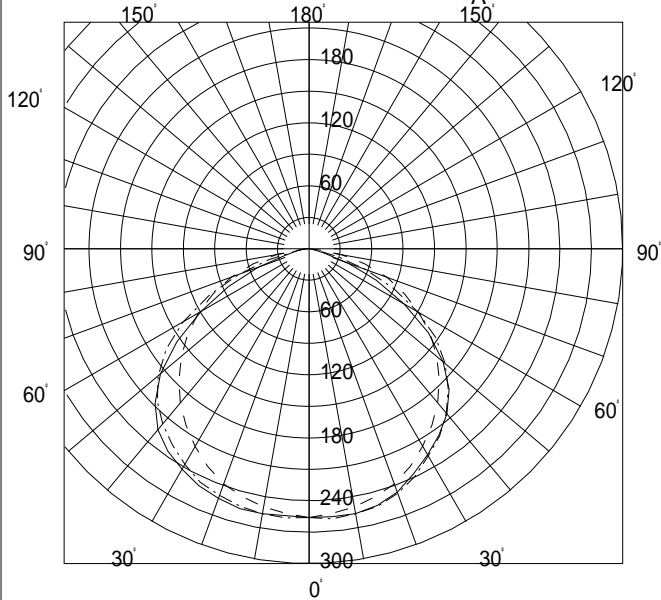

諸特性

光源		FHF32EX-N-H(非常灯)			
最大取付間隔		A-A 1.45H		B-B 1.68H	
器具 効率	上方光束	0.0%			
	下方光束	76.3%			
	計	76.3%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

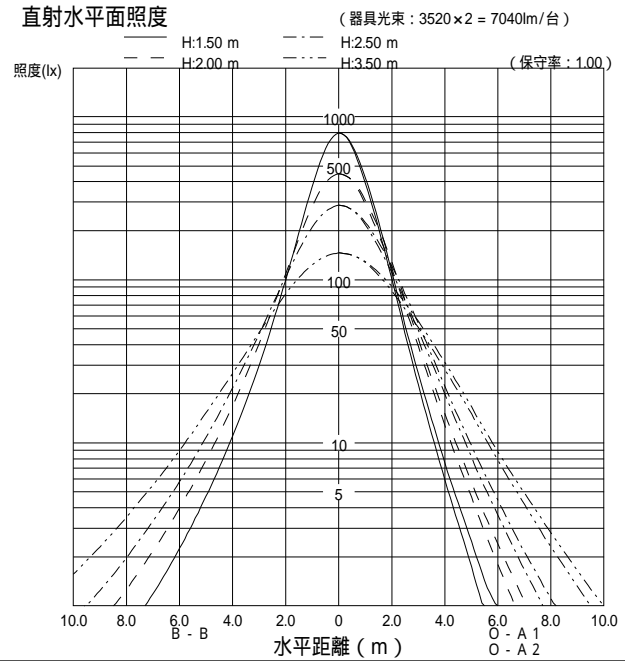

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	34	47	56	62	69	73	79	83	86	89	91	94	96
		10	32	44	50	56	61	64	69	72	73	76	77	79	80
	50	30	24	36	44	52	59	64	71	76	79	84	87	90	93
		10	23	34	41	48	54	58	63	67	70	73	75	77	79
70	30	30	18	29	37	44	52	57	64	70	74	80	83	88	91
		10	17	29	35	42	49	53	59	63	66	70	72	75	77
	10	10	14	24	31	38	44	48	55	60	63	67	70	74	76
		70	30	33	46	54	60	67	71	76	80	83	86	88	90
50		10	31	43	49	55	60	63	68	70	72	75	76	78	79
	50	30	23	36	43	50	58	62	69	74	77	81	84	87	90
		10	22	34	41	47	53	57	63	66	69	72	74	76	78
	30	30	18	29	37	44	51	56	63	69	72	77	81	85	88
30		10	17	28	35	42	48	52	58	63	66	69	72	74	76
	10	10	14	24	31	37	44	48	55	60	63	67	70	73	75
	50	30	23	34	42	48	55	59	66	70	73	77	79	82	84
		10	22	33	40	46	52	56	61	65	67	70	72	74	76
0	30	30	17	29	36	43	50	54	61	66	69	74	76	80	83
		10	17	28	35	41	47	51	57	62	64	68	70	73	75
0	0	0	13	23	29	35	42	46	52	56	59	63	65	68	71