


FVH4091E


VPH




○諸特性

光源		FHF32EX-N-H(非常灯)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.55m	2.07m	2.56m	3.06m	
	B-B	2.01m	2.51m	3.06m	3.62m	
器具効率	上方光束	下方光束		計		
	17.2%	35.6%		52.8%		
保守率	良い	0.690	普通	0.650	悪い	0.610

○配光曲線図 (cd/1000lm)

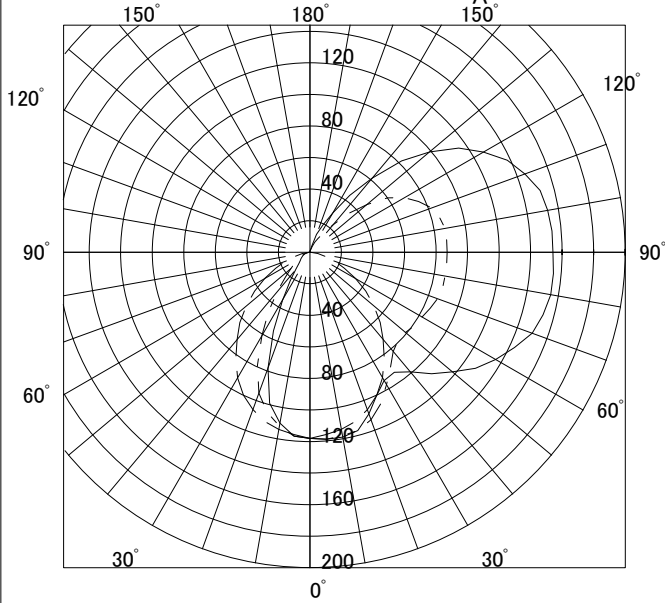

○直射水平面照度

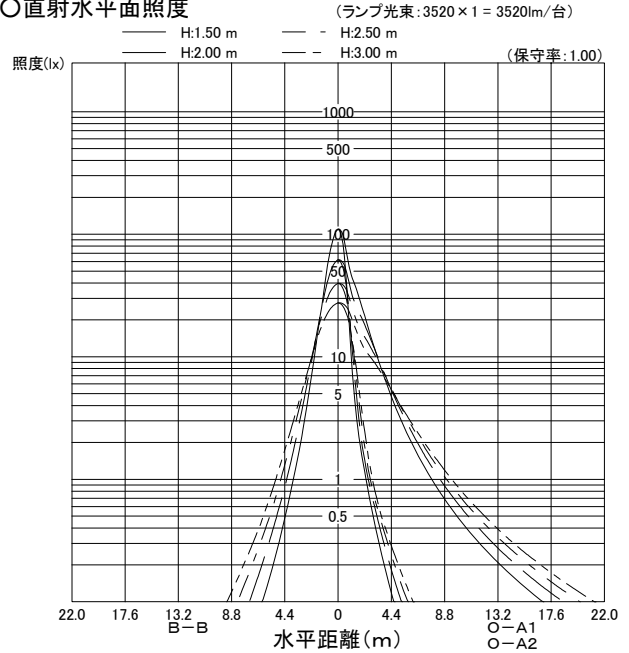

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	22	29	34	38	42	44	48	51	53	55	57	59	60
		10	20	27	31	34	37	39	42	44	45	47	48	49	50
	50	30	15	22	26	30	34	37	42	45	47	51	53	56	58
		10	15	21	24	28	31	34	37	40	41	44	45	47	49
70	30	30	11	17	21	25	29	32	36	40	43	47	49	53	56
		10	11	17	20	24	27	29	33	36	38	41	43	45	47
	10	70	9	14	17	20	24	26	30	33	35	39	41	44	46
		30	20	27	32	35	39	41	44	47	49	51	52	54	56
50	50	30	14	21	25	28	32	35	39	42	44	47	49	52	54
		10	14	20	23	26	30	32	35	38	39	42	43	45	47
	30	30	11	16	20	24	27	30	34	38	40	44	46	49	52
		10	11	16	19	22	26	28	32	34	36	39	41	43	45
30	50	30	13	18	22	25	28	30	34	36	38	41	42	45	46
		10	12	18	21	24	27	28	31	34	35	37	39	40	42
	30	30	10	15	18	21	24	27	30	33	35	38	40	43	45
		10	10	15	17	20	23	25	29	31	33	35	37	39	41
0	30	30	9	13	16	19	22	23	27	29	31	33	35	37	39
		10	9	13	16	18	21	23	26	28	29	32	33	35	37
0	10	30	7	11	14	16	19	21	24	26	28	30	32	34	36
		10	7	11	14	16	19	21	24	26	28	30	32	34	36
0	0	30	5	9	11	13	15	17	19	21	23	25	26	28	30
		10	5	9	11	13	15	17	19	21	23	25	26	28	30