


| | | | | |
|--------|---------------------|----|--|------|
| 形名 | MY-B42533/24/N VCTZ | 電源 | | ○諸特性 |
| 出力 | 段調光 | 温度 | | |
| モード | 節電 | | | |
| オプション1 | | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | | | | |
|----------------|------|-------|--------|--------|-------|----|-------|
| 光源 | | LED | | | | | |
| 最大 取付 間隔 | 高さ | H | | | | | |
| | A-A' | 1.3 H | | | | | |
| | B-B' | 1.2 H | | | | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 | | | |
| | | 0.0% | 100.0% | 100.0% | | | |
| 保守率 | | 良い | 0.810 | 普通 | 0.770 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

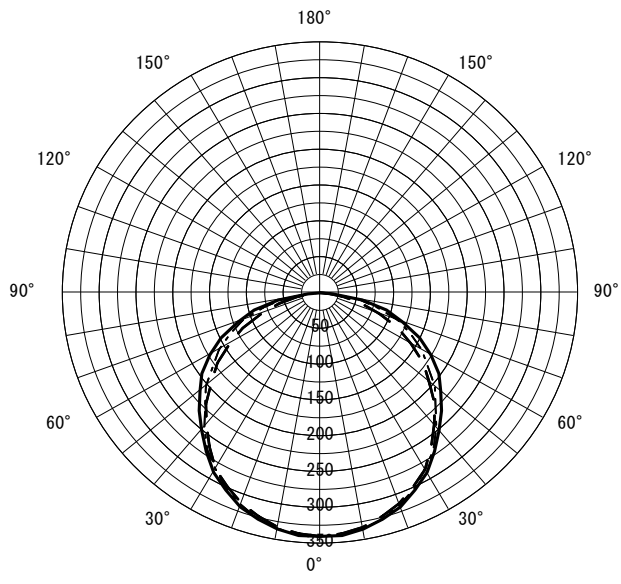

○直射水平面照度 (全光束: 1760 × 1 = 1760lm/台)

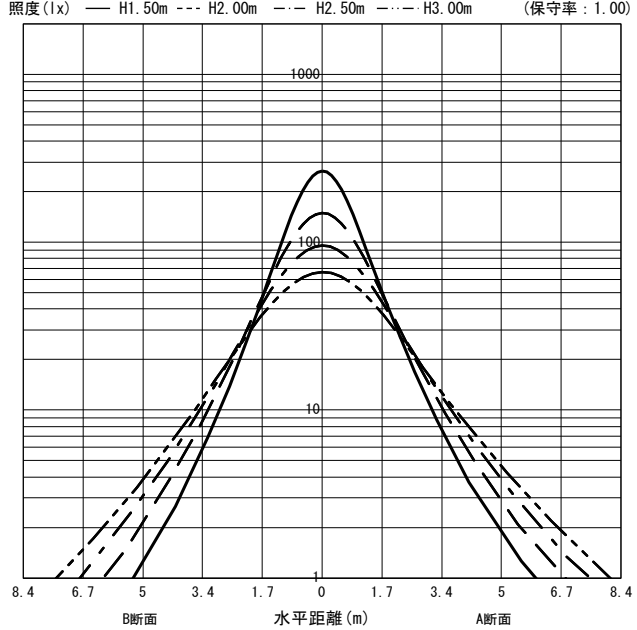

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|----|----|
| 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 20 | 0 | | | | | | | | | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 | | |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 62 | 57 | 47 | 45 | 38 | 37 | 32 | 31 | 60 | 56 | 46 | 44 | 38 | 37 | 32 | 31 | 57 | 53 | 45 | 43 | 37 | 36 | 32 | 31 | 54 | 51 | 43 | 42 | 36 | 36 | 31 | 31 | 31 | 29 |
| 0.80 | 74 | 67 | 59 | 55 | 49 | 47 | 43 | 42 | 72 | 66 | 58 | 55 | 49 | 47 | 43 | 42 | 67 | 63 | 56 | 53 | 48 | 46 | 42 | 41 | 64 | 60 | 54 | 52 | 47 | 46 | 42 | 41 | 41 | 39 |
| 1.00 | 82 | 74 | 68 | 63 | 58 | 55 | 51 | 49 | 79 | 72 | 66 | 62 | 57 | 55 | 51 | 49 | 75 | 69 | 64 | 60 | 56 | 54 | 50 | 49 | 70 | 66 | 61 | 59 | 54 | 53 | 49 | 48 | 48 | 46 |
| 1.25 | 90 | 80 | 76 | 70 | 67 | 62 | 59 | 57 | 87 | 78 | 74 | 69 | 66 | 62 | 59 | 57 | 81 | 75 | 71 | 67 | 64 | 61 | 58 | 56 | 77 | 72 | 68 | 65 | 62 | 60 | 57 | 56 | 55 | 53 |
| 1.50 | 95 | 84 | 83 | 75 | 73 | 68 | 66 | 62 | 92 | 82 | 81 | 74 | 72 | 67 | 65 | 62 | 86 | 79 | 77 | 72 | 70 | 66 | 64 | 62 | 81 | 76 | 73 | 70 | 67 | 65 | 62 | 61 | 61 | 59 |
| 2.00 | 103 | 90 | 92 | 82 | 83 | 76 | 76 | 71 | 99 | 88 | 89 | 81 | 82 | 75 | 75 | 71 | 93 | 85 | 85 | 79 | 78 | 74 | 73 | 70 | 87 | 82 | 81 | 77 | 75 | 73 | 71 | 69 | 69 | 66 |
| 2.50 | 108 | 93 | 98 | 87 | 90 | 81 | 84 | 77 | 104 | 92 | 95 | 86 | 88 | 81 | 82 | 76 | 97 | 88 | 90 | 83 | 85 | 79 | 80 | 75 | 91 | 86 | 86 | 81 | 81 | 78 | 77 | 74 | 74 | 72 |
| 3.00 | 112 | 96 | 103 | 90 | 96 | 85 | 90 | 81 | 107 | 94 | 100 | 89 | 93 | 84 | 88 | 81 | 100 | 91 | 94 | 87 | 89 | 83 | 85 | 80 | 94 | 88 | 89 | 85 | 85 | 81 | 81 | 78 | 78 | 76 |
| 4.00 | 116 | 99 | 109 | 94 | 103 | 91 | 98 | 87 | 112 | 97 | 106 | 93 | 100 | 90 | 96 | 86 | 104 | 94 | 99 | 91 | 95 | 88 | 91 | 85 | 98 | 92 | 94 | 89 | 91 | 86 | 87 | 84 | 83 | 81 |
| 5.00 | 119 | 101 | 113 | 97 | 108 | 94 | 103 | 91 | 115 | 99 | 110 | 96 | 105 | 93 | 101 | 90 | 107 | 97 | 103 | 94 | 99 | 91 | 96 | 89 | 100 | 94 | 97 | 92 | 94 | 89 | 91 | 87 | 87 | 85 |
| 7.00 | 123 | 103 | 118 | 100 | 114 | 98 | 110 | 96 | 118 | 102 | 114 | 99 | 110 | 97 | 107 | 95 | 110 | 99 | 107 | 97 | 104 | 95 | 101 | 93 | 103 | 96 | 100 | 95 | 98 | 93 | 96 | 91 | 91 | 89 |
| 10.00 | 125 | 105 | 122 | 103 | 119 | 101 | 116 | 99 | 120 | 103 | 118 | 102 | 115 | 100 | 112 | 98 | 112 | 101 | 110 | 99 | 108 | 98 | 106 | 97 | 105 | 98 | 103 | 97 | 102 | 96 | 100 | 95 | 94 | 92 |

JIS C 8030:2014

三菱電機照明株式会社