


|        |                   |    |  |      |
|--------|-------------------|----|--|------|
| 形名     | MY-B425332/N AHTN | 電源 |  | ○諸特性 |
| 出力     | 段調光               | 温度 |  |      |
| モード    | 定格                |    |  |      |
| オプション1 |                   |    |  |      |
| オプション2 |                   |    |  |      |
| オプション3 |                   |    |  |      |
| オプション4 |                   |    |  |      |
| オプション5 |                   |    |  |      |




|                |      |       |        |        |       |    |       |
|----------------|------|-------|--------|--------|-------|----|-------|
| 光源             |      | LED   |        |        |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H     |        |        |       |    |       |
|                | A-A' | 1.3 H |        |        |       |    |       |
|                | B-B' | 1.2 H |        |        |       |    |       |
| 器具効率           |      | 上方光束  | 下方光束   | 計      |       |    |       |
|                |      | 0.0%  | 100.0% | 100.0% |       |    |       |
| 保守率            |      | 良い    | 0.810  | 普通     | 0.770 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

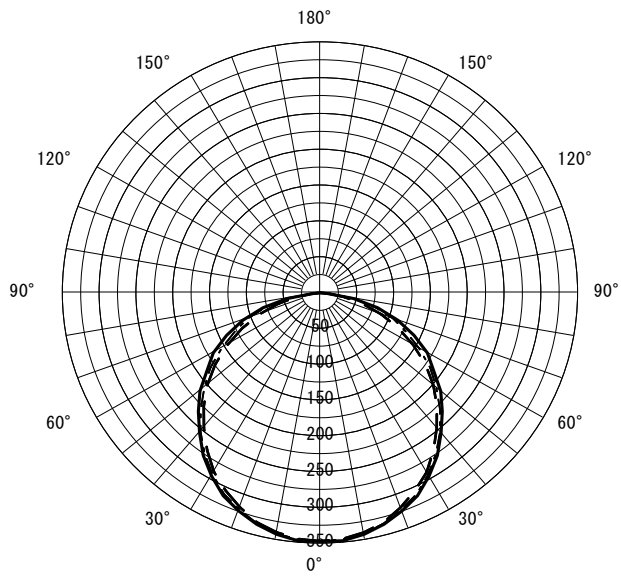

○直射水平面照度 (全光束: 2420 × 1 = 2420lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

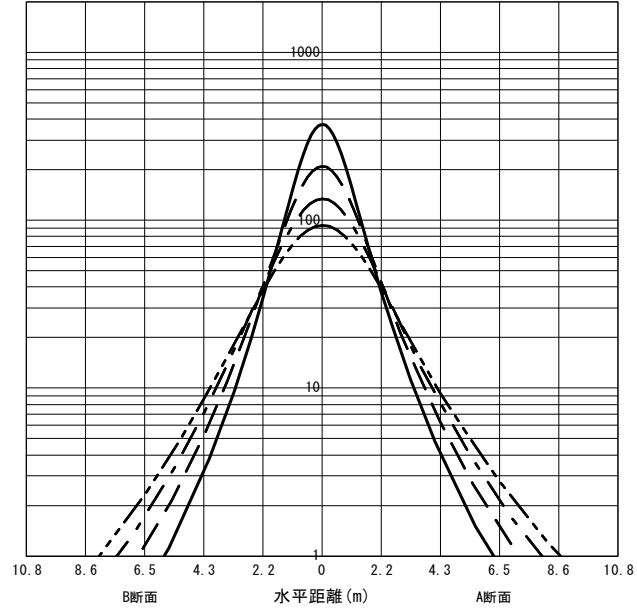

| 反射率 (%) |                 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |    |     |    |     |    |     |    |     |    |     |    |    |    |
|---------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|----|----|
| 天井      | 80              |     |     |     |     |     |     |     | 70  |     |     |     | 50  |     |     |    | 30  |     |     |     | 20  | 0  |     |    |     |    |     |    |     |    |     |    |    |    |
| 壁       | 70              | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10 | 70  | 50  | 30  | 10  | 10  | 0  |     |    |     |    |     |    |     |    |     |    |    |    |
| 床       | 30              | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 30  | 10  | 30  | 10  | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 0  |    |
| 室指数     | 作業面照明率 (× 0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |     |     |    |     |    |     |    |     |    |     |    |     |    |    |    |
| 0.60    | 62              | 57  | 48  | 45  | 39  | 37  | 33  | 32  | 61  | 56  | 47  | 45  | 38  | 37  | 32  | 32 | 57  | 54  | 45  | 44  | 38  | 37 | 32  | 32 | 54  | 52 | 44  | 43 | 37  | 36 | 32  | 32 | 30 |    |
| 0.80    | 74              | 68  | 60  | 56  | 50  | 48  | 44  | 43  | 72  | 66  | 59  | 55  | 50  | 48  | 43  | 42 | 68  | 63  | 57  | 54  | 49  | 47 | 43  | 42 | 64  | 61 | 55  | 53 | 48  | 47 | 42  | 42 | 40 |    |
| 1.00    | 83              | 74  | 68  | 64  | 59  | 56  | 52  | 50  | 80  | 73  | 67  | 63  | 58  | 55  | 52  | 50 | 75  | 70  | 64  | 61  | 57  | 55 | 51  | 50 | 71  | 67 | 62  | 60 | 55  | 54 | 50  | 49 | 47 |    |
| 1.25    | 90              | 80  | 77  | 71  | 68  | 63  | 61  | 58  | 87  | 79  | 75  | 70  | 67  | 63  | 60  | 57 | 82  | 76  | 72  | 68  | 65  | 62 | 59  | 57 | 77  | 73 | 69  | 66 | 63  | 61 | 58  | 57 | 56 | 54 |
| 1.50    | 96              | 84  | 83  | 76  | 74  | 69  | 67  | 63  | 93  | 83  | 81  | 75  | 73  | 68  | 66  | 63 | 87  | 80  | 78  | 73  | 71  | 67 | 65  | 63 | 82  | 77 | 74  | 71 | 68  | 66 | 63  | 62 | 62 | 60 |
| 2.00    | 103             | 90  | 93  | 83  | 84  | 77  | 78  | 72  | 100 | 88  | 90  | 82  | 83  | 76  | 76  | 71 | 93  | 85  | 86  | 80  | 79  | 75 | 74  | 71 | 88  | 83 | 82  | 78 | 76  | 74 | 72  | 70 | 70 | 67 |
| 2.50    | 108             | 94  | 99  | 87  | 91  | 82  | 85  | 78  | 105 | 92  | 96  | 86  | 89  | 81  | 83  | 77 | 98  | 89  | 91  | 84  | 85  | 80 | 81  | 76 | 92  | 86 | 86  | 82 | 82  | 79 | 78  | 75 | 75 | 73 |
| 3.00    | 112             | 96  | 104 | 91  | 97  | 86  | 91  | 82  | 108 | 94  | 101 | 90  | 94  | 85  | 89  | 81 | 101 | 92  | 95  | 87  | 90  | 84 | 85  | 80 | 95  | 89 | 90  | 85 | 86  | 82 | 82  | 79 | 79 | 77 |
| 4.00    | 117             | 99  | 110 | 95  | 104 | 91  | 99  | 88  | 112 | 98  | 106 | 94  | 101 | 90  | 96  | 87 | 105 | 95  | 100 | 92  | 96  | 89 | 92  | 86 | 98  | 92 | 95  | 89 | 91  | 87 | 88  | 85 | 84 | 82 |
| 5.00    | 119             | 101 | 114 | 98  | 109 | 94  | 104 | 92  | 115 | 100 | 110 | 96  | 105 | 93  | 101 | 91 | 107 | 97  | 103 | 94  | 100 | 92 | 97  | 89 | 100 | 94 | 97  | 92 | 95  | 90 | 92  | 88 | 87 | 85 |
| 7.00    | 123             | 103 | 118 | 101 | 114 | 98  | 111 | 96  | 118 | 102 | 114 | 99  | 111 | 97  | 108 | 95 | 110 | 99  | 107 | 97  | 104 | 95 | 102 | 94 | 103 | 97 | 101 | 95 | 99  | 94 | 97  | 92 | 91 | 89 |
| 10.00   | 125             | 105 | 122 | 103 | 119 | 101 | 116 | 100 | 121 | 104 | 118 | 102 | 115 | 100 | 113 | 99 | 112 | 101 | 110 | 100 | 108 | 98 | 106 | 97 | 105 | 99 | 103 | 97 | 102 | 96 | 100 | 95 | 94 | 92 |

JIS C 8030:2014

三菱電機照明株式会社