


MY-B425338/N

B4332A


VCTZ



○諸特性


光源		LED2380lm(定格モード)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.90m	2.51m	3.12m	3.73m	
	B-B	2.14m	2.68m	3.27m	3.86m	
器具効率	上方光束	下方光束		計		
	0.0%	74.5%		74.5%		
保守率	良い	0.770	普通	0.720	悪い	0.680

○配光曲線図(cd/1000lm)

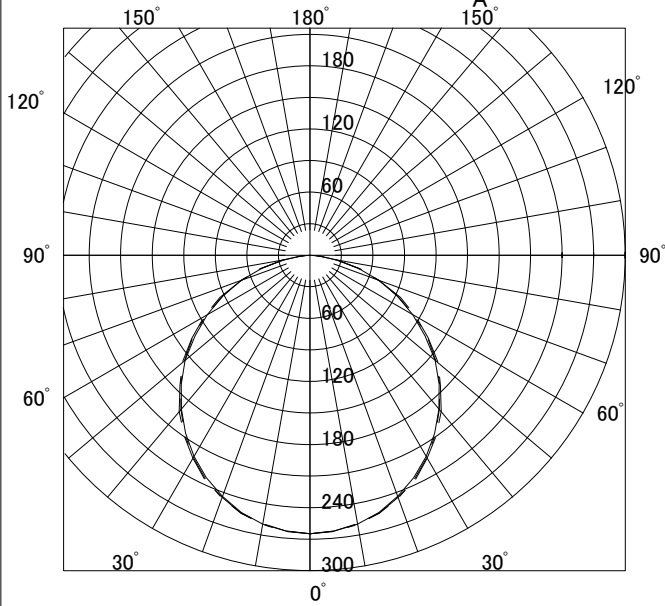

○直射水平面照度

(ランプ光束: 2380 × 1 = 2380lm/台)

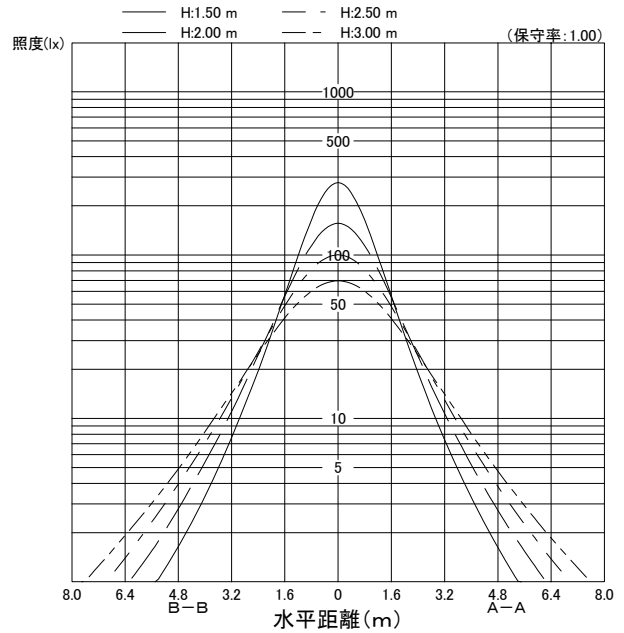

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	34	47	55	61	67	71	77	81	84	87	89	92	94
		10	32	43	50	55	60	63	67	70	72	74	75	77	78
	50	30	24	36	44	51	58	62	69	74	77	82	85	88	91
		10	23	34	41	47	53	56	62	65	68	71	73	75	77
70	30	30	18	30	36	43	51	55	63	68	72	77	81	85	89
		10	18	29	35	41	47	51	57	62	64	68	71	73	76
	10	10	15	25	31	37	43	47	53	58	61	65	68	72	74
		70	30	33	46	53	59	65	69	74	78	81	84	86	88
50	50	30	24	35	43	49	56	61	67	72	75	79	82	85	88
		10	23	34	40	46	52	56	61	65	67	70	72	74	76
	30	30	18	29	36	43	50	54	61	67	70	75	79	83	86
		10	18	28	35	41	47	51	57	61	64	67	70	73	75
30	50	30	23	34	41	48	54	58	64	68	71	75	77	80	82
		10	22	33	39	45	51	54	59	63	65	68	70	73	74
	30	30	18	29	35	42	48	52	59	64	67	72	74	78	81
		10	18	28	34	40	46	50	56	60	63	66	69	71	73
0	30	30	18	28	34	41	47	51	57	61	64	68	71	74	76
		10	17	28	34	40	46	49	55	59	61	65	67	70	72
0	10	10	14	24	30	36	42	46	52	56	59	63	66	69	71
		0	13	23	29	34	41	44	50	55	57	61	64	67	69