


	MY-B425338/N
	L4892A
	VCTZ



○配光曲線図 (cd/1000lm)

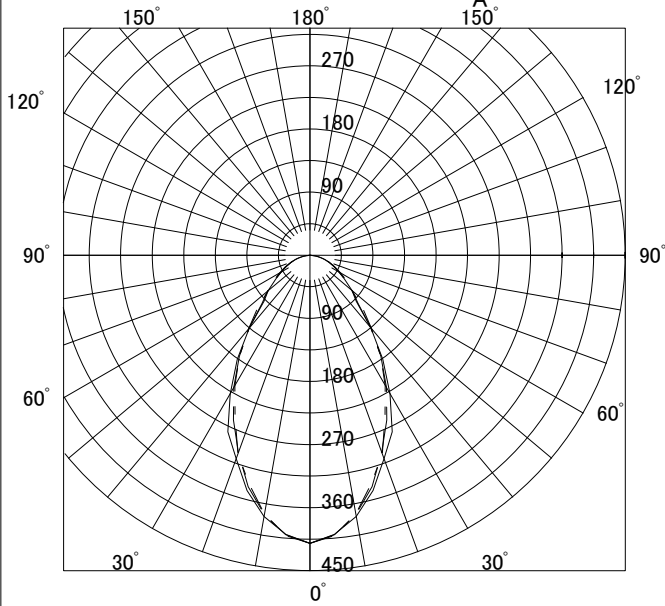


○諸特性

光源		LED2380lm(定格モード)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.43m	1.87m	2.34m	2.79m	
	B-B	1.68m	2.02m	2.41m	2.82m	
器具効率	上方光束	下方光束		計		
	0.0%	56.2%		56.2%		
保守率	良い	0.770	普通	0.720	悪い	0.680

○直射水平面照度

(ランプ光束: 2380 × 1 = 2380lm/台)

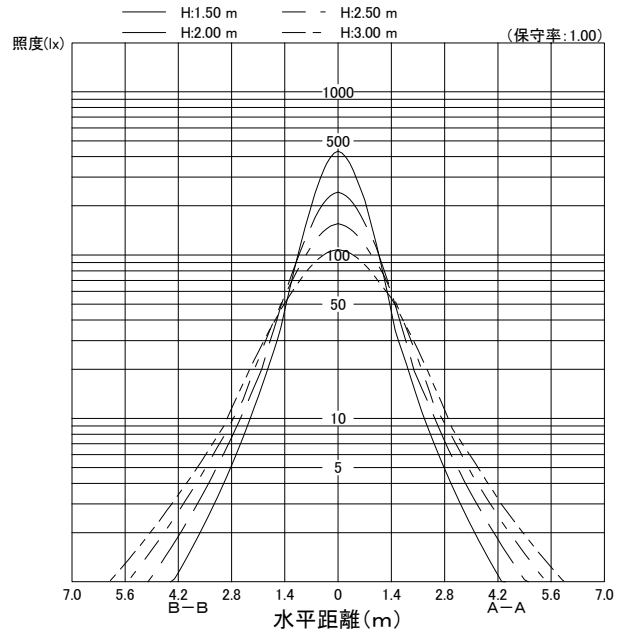

反射率(%)			作業面照明率(×0.01)												
			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	30	39	46	50	54	57	61	63	65	67	68	70	71
		10	28	36	41	45	48	50	53	54	56	57	58	59	60
	50	30	23	32	38	43	48	51	55	59	61	64	66	68	70
		10	22	30	36	40	44	46	50	52	53	55	56	58	59
70	30	30	19	28	34	38	43	46	51	55	57	61	63	66	68
		10	18	27	32	36	40	43	47	49	51	53	55	57	58
	10	10	16	24	30	34	38	40	44	47	49	52	54	56	57
	70	30	29	38	44	49	53	55	59	61	63	65	66	67	69
50		10	27	36	41	44	47	49	52	54	55	56	57	58	59
	50	30	22	32	38	42	47	50	54	57	59	62	64	66	67
		10	22	30	36	40	43	46	49	51	53	55	56	57	58
	30	30	19	27	33	38	42	46	50	54	56	59	61	64	66
30		10	18	27	32	36	40	43	46	49	51	53	54	56	58
	10	10	16	24	30	34	37	40	44	47	49	52	53	55	57
	50	30	22	31	37	41	45	48	52	54	56	58	60	62	63
		10	21	30	35	39	42	45	48	50	51	53	55	56	57
0	30	30	18	27	32	36	40	43	47	49	51	54	55	57	59
		10	18	26	31	35	39	42	45	47	49	51	53	54	55
	10	10	16	24	29	33	37	40	43	46	48	50	52	53	55
0	0	0	15	23	28	32	36	38	42	45	46	49	50	52	53