


	MY-B43033/14/W
	AHZ




○配光曲線図 (cd/1000lm)

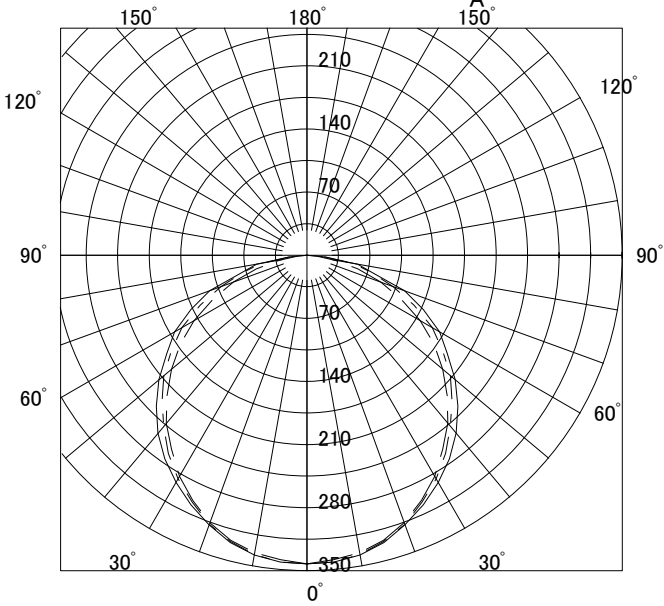

○諸特性

光源		LED2760lm W				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.93m	2.55m	3.18m	3.81m	
	B-B	2.09m	2.62m	3.20m	3.79m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.810	普通	0.770	悪い	0.680

○直射水平面照度

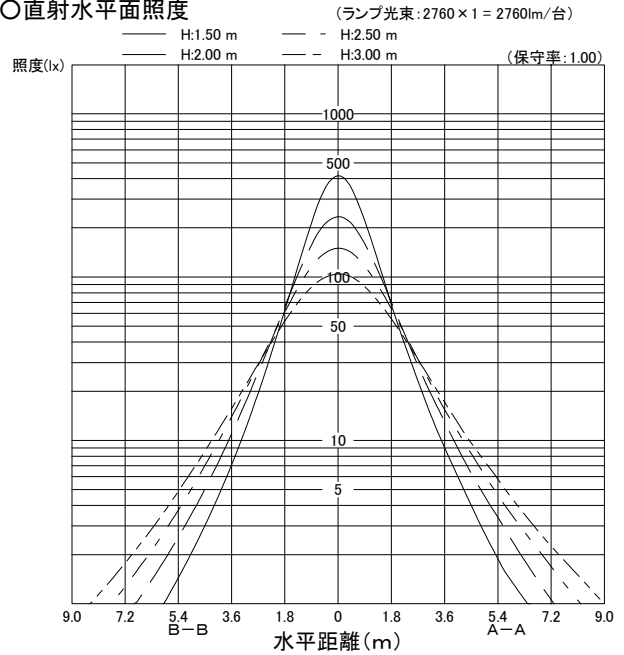

作業面照明率 (× 0.01)															
反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	45	62	72	81	90	95	103	108	112	116	119	123	125
		10	42	57	66	73	80	84	89	93	96	99	101	103	105
	50	30	31	47	57	67	76	82	92	98	103	109	113	118	122
		10	30	45	54	62	70	74	82	87	90	94	97	100	103
70	30	30	24	39	48	57	66	73	83	90	96	103	108	114	119
		10	23	37	46	54	62	67	76	81	85	90	94	98	101
	10	10	19	32	40	48	56	62	70	77	81	87	91	96	99
		70	30	44	60	70	78	87	92	99	104	108	112	115	118
50	10	10	41	56	64	71	78	82	88	92	94	97	99	102	103
		30	31	47	56	65	74	80	89	96	100	106	110	114	118
	30	10	30	45	53	61	69	73	81	86	89	93	96	99	102
		10	10	19	32	40	48	56	61	70	76	80	86	90	95
30	50	30	30	45	54	63	71	76	85	90	94	99	103	107	110
		10	29	43	52	59	67	72	79	84	87	91	94	97	99
	30	30	23	38	46	55	63	69	78	85	89	95	99	104	108
		10	23	37	45	53	61	66	74	79	83	88	91	95	98
0	10	10	19	32	40	47	56	61	69	75	79	85	89	93	97
		30	30	45	54	63	71	76	85	90	94	99	103	107	110
30	10	10	23	36	44	52	60	65	72	78	81	86	89	93	96
		30	23	37	45	53	62	67	75	81	85	90	94	98	102
0	10	10	19	32	39	47	55	60	68	74	78	84	87	92	95
		30	23	37	45	53	62	67	75	81	85	90	94	98	102
0	0	0	17	30	37	45	53	58	66	72	76	81	85	89	92
		30	23	36	44	52	60	65	72	78	81	86	89	93	96