


形名	MY-B430337/W AHZ	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1	B31011			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED			
最大 取付 間隔	高さ	H			
	A-A'	1.2 H			
	B-B'	1.3 H			
器具効率		上方光束	下方光束	計	
保守率		良い	普通	悪い	
		0.810	0.770	100.0%	0.680

○配光曲線図 (cd/1000lm)

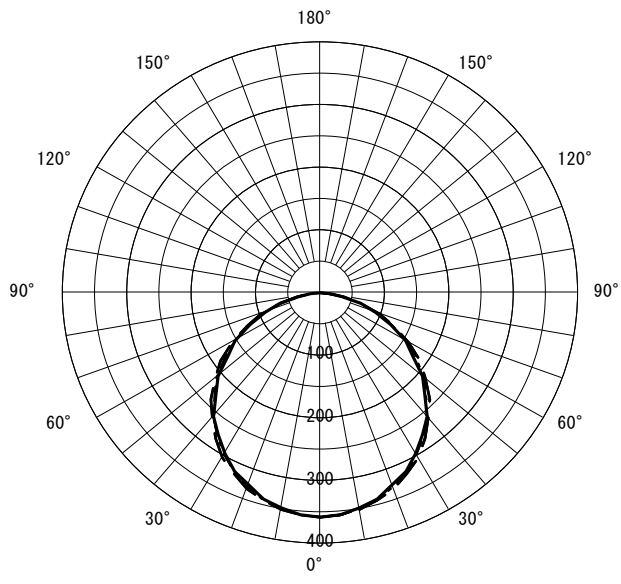

○直射水平面照度 (全光束：1670 × 1 = 1670lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率：1.00)

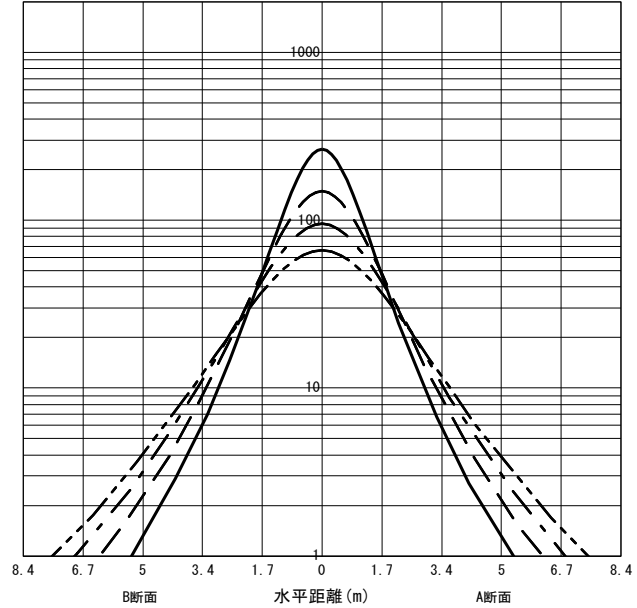

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数	作業面照明率 (× 0.01)																																	
0.60	63	58	48	46	39	38	33	33	61	57	47	45	39	38	33	33	58	54	46	44	38	37	33	33	55	52	45	43	38	37	33	32	32	31
0.80	75	68	60	57	51	49	45	43	73	67	59	56	51	49	44	43	69	64	57	55	50	48	44	43	65	62	55	53	49	47	43	43	43	41
1.00	83	75	69	64	60	57	53	51	81	73	68	64	59	56	53	51	76	70	65	62	58	56	52	51	72	68	63	60	56	55	51	50	50	48
1.25	91	81	78	71	69	64	62	59	88	79	76	70	68	64	61	59	83	76	73	69	66	63	60	58	78	73	70	67	64	62	59	58	57	55
1.50	96	85	84	76	75	70	68	64	93	83	82	75	74	69	67	64	87	80	78	74	71	68	66	64	82	78	75	72	69	67	64	63	63	61
2.00	104	91	93	83	85	78	79	73	100	89	91	82	83	77	77	72	94	86	86	80	80	76	75	72	88	83	82	78	77	74	73	71	70	68
2.50	109	94	100	88	92	83	86	79	105	92	97	87	90	82	84	78	98	89	92	85	86	81	81	77	92	87	87	83	83	79	79	76	76	74
3.00	112	96	104	91	97	87	91	83	108	95	101	90	95	86	90	82	101	92	95	88	91	84	86	81	95	89	91	86	87	83	83	80	79	77
4.00	117	99	110	95	104	92	99	88	113	98	107	94	102	91	97	88	105	95	101	92	96	89	93	86	99	93	95	90	92	87	89	85	85	83
5.00	120	101	114	98	109	95	105	92	115	100	110	97	106	94	102	91	108	97	104	94	100	92	97	90	101	95	98	92	95	90	93	88	88	86
7.00	123	103	119	101	115	99	111	96	118	102	115	100	111	98	108	96	110	99	107	97	105	96	102	94	103	97	101	95	99	94	97	92	92	90
10.00	125	105	122	103	119	101	117	100	121	104	118	102	115	100	113	99	112	101	110	100	108	98	106	97	105	99	104	98	102	96	101	95	95	93

JIS C 8030:2014

三菱電機照明株式会社