


形名	MY-B430337/W AHZ	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1	L4261F			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.1 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

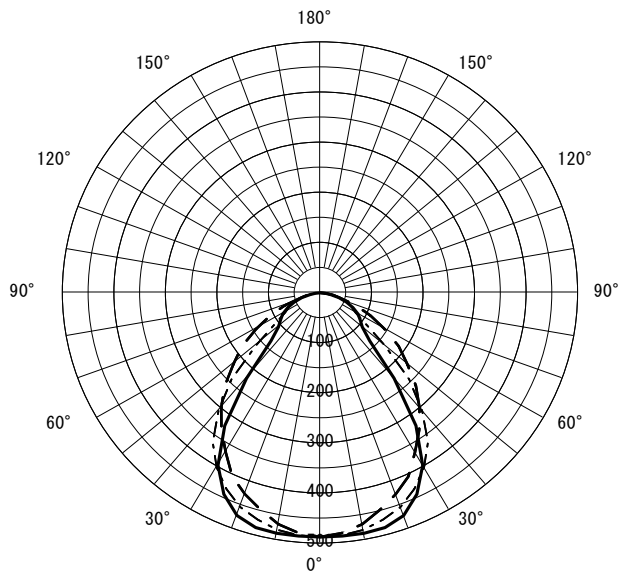

○直射水平面照度 (全光束: 2270 × 1 = 2270lm/台)

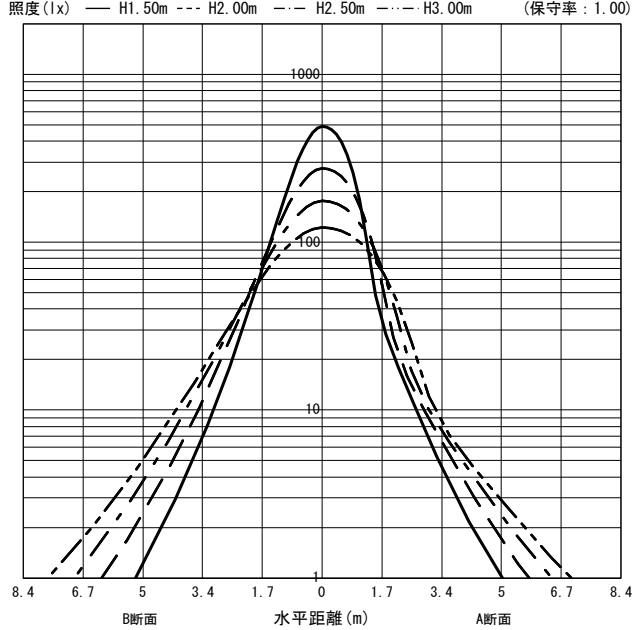

反射率 (%)																																		
天井	80								70								50								30								20	0
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																	
0.60	70	65	57	54	49	47	43	43	68	63	56	54	48	47	43	43	65	61	55	53	48	47	43	42	63	59	53	52	47	46	43	42	42	41
0.80	82	74	69	65	60	58	55	53	80	73	68	64	60	58	54	53	76	71	66	63	59	57	54	53	72	68	64	62	58	57	53	53	52	51
1.00	90	80	77	72	69	65	63	61	87	79	76	71	68	65	62	60	83	77	73	69	66	64	61	60	79	74	71	68	65	63	61	60	59	58
1.25	96	86	85	78	77	72	71	67	94	84	83	77	76	71	70	67	89	82	80	75	74	71	69	67	84	79	77	74	72	70	67	66	66	64
1.50	101	89	91	82	83	77	77	72	98	88	89	81	81	76	76	72	93	85	85	80	79	75	74	71	88	83	82	78	77	74	72	71	70	69
2.00	108	94	99	88	91	83	86	79	105	93	96	87	90	83	84	79	98	90	92	85	86	81	82	78	93	87	88	84	83	80	80	77	77	75
2.50	112	97	104	92	97	88	92	84	108	95	101	91	95	87	90	84	102	93	96	89	91	86	87	83	96	90	92	87	88	84	84	82	81	79
3.00	115	99	108	94	102	91	97	88	111	97	105	93	100	90	95	87	104	95	99	91	95	88	91	86	98	92	94	90	91	87	88	85	84	82
4.00	119	101	113	98	108	95	104	92	115	100	110	97	105	94	101	92	108	97	104	95	100	92	97	90	101	95	98	93	95	91	93	89	88	86
5.00	121	103	116	100	112	97	108	95	117	101	113	99	109	97	105	94	109	99	106	97	103	95	100	93	103	96	100	95	98	93	96	92	91	89
7.00	124	104	120	102	117	100	114	99	120	103	116	101	113	100	111	98	112	101	109	99	107	98	105	96	105	98	103	97	101	96	99	95	94	92
10.00	126	106	124	104	121	103	119	102	122	104	119	103	117	102	115	101	113	102	112	101	110	100	108	99	106	100	105	99	104	98	102	97	96	94

JIS C 8030:2014

三菱電機照明株式会社