


形名	MY-B430338/W AHZ	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1	L4892A			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	0.9 H					
	B-B'	0.9 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

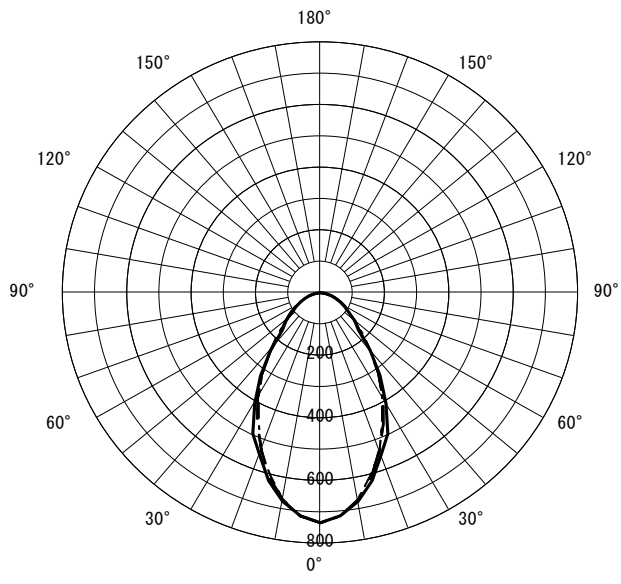

○直射水平面照度 (全光束: 1520 × 1 = 1520lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

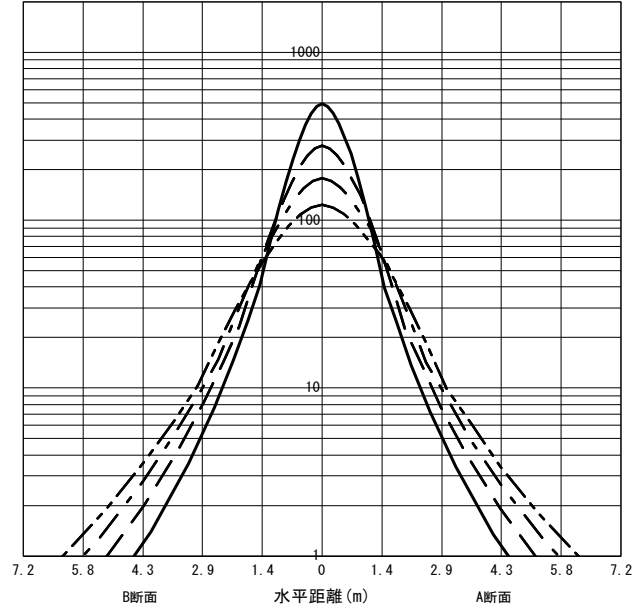

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0										
室指数	作業面照明率 (× 0.01)																																	
0.60	75	69	63	60	55	54	50	50	74	68	62	59	55	54	50	49	71	66	61	58	54	53	50	49	68	65	60	58	54	53	50	49	49	48
0.80	86	78	74	69	66	63	60	59	84	77	73	69	65	63	60	59	80	75	71	67	64	62	60	59	77	73	69	66	63	62	59	58	58	57
1.00	93	83	81	75	74	70	68	66	90	82	80	75	73	69	67	65	86	80	77	73	71	69	66	65	82	78	75	72	70	68	66	65	64	63
1.25	99	88	88	81	81	76	75	72	96	87	87	80	80	75	74	71	92	84	84	79	78	74	73	71	87	82	81	77	76	74	72	70	70	69
1.50	104	91	94	85	86	80	81	76	101	90	92	84	85	79	80	76	95	87	88	82	82	78	78	75	91	85	85	81	80	77	76	74	74	73
2.00	110	95	101	90	94	86	89	82	106	94	99	89	93	85	88	82	100	92	94	88	89	84	85	81	95	89	90	86	86	83	83	80	80	78
2.50	114	98	106	94	100	90	95	87	110	97	103	93	98	89	93	86	103	94	98	91	94	88	90	85	98	92	94	89	90	86	87	84	84	82
3.00	116	100	110	96	104	93	99	90	113	98	107	95	102	92	97	89	106	96	101	93	97	90	94	88	100	94	96	91	93	89	90	87	86	85
4.00	120	102	114	99	110	96	106	94	116	101	111	98	107	95	103	93	109	98	105	96	102	94	99	92	102	96	99	94	97	92	94	91	90	88
5.00	122	103	118	101	113	99	110	97	118	102	114	100	110	98	107	96	110	100	107	98	104	96	102	94	104	97	101	96	99	94	97	93	92	90
7.00	125	105	121	103	118	101	115	100	120	104	117	102	114	100	112	99	112	101	110	100	108	98	106	97	105	99	104	98	102	97	101	96	95	93
10.00	127	106	124	105	122	103	119	102	122	105	120	104	118	102	116	101	114	102	112	101	111	100	109	100	107	100	105	99	104	99	103	98	97	95

JIS C 8030:2014

三菱電機照明株式会社