


|        |                     |    |  |      |
|--------|---------------------|----|--|------|
| 形名     | MY-B45033/23/N VCTZ | 電源 |  | ○諸特性 |
| 出力     | 段調光                 | 温度 |  |      |
| モード    | 節電                  |    |  |      |
| オプション1 |                     |    |  |      |
| オプション2 |                     |    |  |      |
| オプション3 |                     |    |  |      |
| オプション4 |                     |    |  |      |
| オプション5 |                     |    |  |      |




| 光源             |      | LED   |        |        |       |    |       |
|----------------|------|-------|--------|--------|-------|----|-------|
| 最大<br>取付<br>間隔 | 高さ   | H     |        |        |       |    |       |
|                | A-A' | 1.3 H |        |        |       |    |       |
|                | B-B' | 1.2 H |        |        |       |    |       |
| 器具効率           |      | 上方光束  | 下方光束   | 計      |       |    |       |
|                |      | 0.0%  | 100.0% | 100.0% |       |    |       |
| 保守率            |      | 良い    | 0.810  | 普通     | 0.770 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

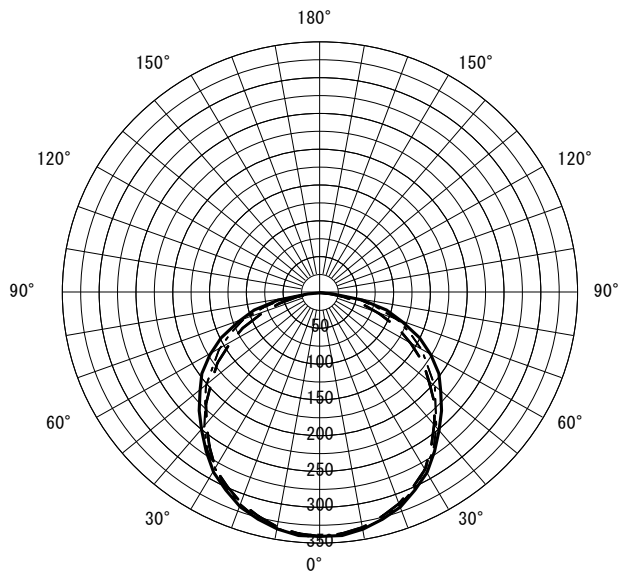

○直射水平面照度 (全光束: 3660 × 1 = 3660lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

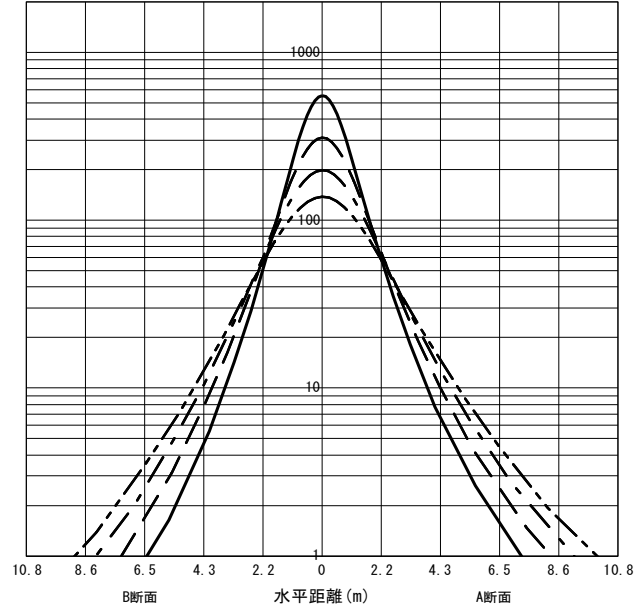

| 反射率 (%) |                 |     |     |     |     |     |     |    |     |     |     |     |     |     |     |    |     |     |     |    |     |    |     |    |     |    |     |    |     |    |     |    |    |    |  |  |  |  |
|---------|-----------------|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|----|----|--|--|--|--|
| 天井      | 80              |     |     |     |     |     |     |    | 70  |     |     |     |     |     |     |    | 50  |     |     |    |     |    |     |    | 30  |    |     |    |     |    |     |    | 20 | 0  |  |  |  |  |
| 壁       | 70              | 50  | 30  | 10  | 70  | 50  | 30  | 10 | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10 | 70  | 50  | 30  | 10 | 70  | 50 | 30  | 10 | 70  | 50 | 30  | 10 | 10  | 0  |     |    |    |    |  |  |  |  |
| 床       | 30              | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 30  | 10  | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 10 | 0  |  |  |  |  |
| 室指数     | 作業面照明率 (× 0.01) |     |     |     |     |     |     |    |     |     |     |     |     |     |     |    |     |     |     |    |     |    |     |    |     |    |     |    |     |    |     |    |    |    |  |  |  |  |
| 0.60    | 62              | 57  | 47  | 45  | 38  | 37  | 32  | 31 | 60  | 56  | 46  | 44  | 38  | 37  | 32  | 31 | 57  | 53  | 45  | 43 | 37  | 36 | 32  | 31 | 54  | 51 | 43  | 42 | 36  | 36 | 31  | 31 | 31 | 29 |  |  |  |  |
| 0.80    | 74              | 67  | 59  | 55  | 49  | 47  | 43  | 42 | 72  | 66  | 58  | 55  | 49  | 47  | 43  | 42 | 67  | 63  | 56  | 53 | 48  | 46 | 42  | 41 | 64  | 60 | 54  | 52 | 47  | 46 | 42  | 41 | 41 | 39 |  |  |  |  |
| 1.00    | 82              | 74  | 68  | 63  | 58  | 55  | 51  | 49 | 79  | 72  | 66  | 62  | 57  | 55  | 51  | 49 | 75  | 69  | 64  | 60 | 56  | 54 | 50  | 49 | 70  | 66 | 61  | 59 | 54  | 53 | 49  | 48 | 48 | 46 |  |  |  |  |
| 1.25    | 90              | 80  | 76  | 70  | 67  | 62  | 59  | 57 | 87  | 78  | 74  | 69  | 66  | 62  | 59  | 57 | 81  | 75  | 71  | 67 | 64  | 61 | 58  | 56 | 77  | 72 | 68  | 65 | 62  | 60 | 57  | 56 | 55 | 53 |  |  |  |  |
| 1.50    | 95              | 84  | 83  | 75  | 73  | 68  | 66  | 62 | 92  | 82  | 81  | 74  | 72  | 67  | 65  | 62 | 86  | 79  | 77  | 72 | 70  | 66 | 64  | 62 | 81  | 76 | 73  | 70 | 67  | 65 | 62  | 61 | 61 | 59 |  |  |  |  |
| 2.00    | 103             | 90  | 92  | 82  | 83  | 76  | 76  | 71 | 99  | 88  | 89  | 81  | 82  | 75  | 75  | 71 | 93  | 85  | 85  | 79 | 78  | 74 | 73  | 70 | 87  | 82 | 81  | 77 | 75  | 73 | 71  | 69 | 69 | 66 |  |  |  |  |
| 2.50    | 108             | 93  | 98  | 87  | 90  | 81  | 84  | 77 | 104 | 92  | 95  | 86  | 88  | 81  | 82  | 76 | 97  | 88  | 90  | 83 | 85  | 79 | 80  | 75 | 91  | 86 | 86  | 81 | 81  | 78 | 77  | 74 | 74 | 72 |  |  |  |  |
| 3.00    | 112             | 96  | 103 | 90  | 96  | 85  | 90  | 81 | 107 | 94  | 100 | 89  | 93  | 84  | 88  | 81 | 100 | 91  | 94  | 87 | 89  | 83 | 85  | 80 | 94  | 88 | 89  | 85 | 85  | 81 | 81  | 78 | 78 | 76 |  |  |  |  |
| 4.00    | 116             | 99  | 109 | 94  | 103 | 91  | 98  | 87 | 112 | 97  | 106 | 93  | 100 | 90  | 96  | 86 | 104 | 94  | 99  | 91 | 95  | 88 | 91  | 85 | 98  | 92 | 94  | 89 | 91  | 86 | 87  | 84 | 83 | 81 |  |  |  |  |
| 5.00    | 119             | 101 | 113 | 97  | 108 | 94  | 103 | 91 | 115 | 99  | 110 | 96  | 105 | 93  | 101 | 90 | 107 | 97  | 103 | 94 | 99  | 91 | 96  | 89 | 100 | 94 | 97  | 92 | 94  | 89 | 91  | 87 | 87 | 85 |  |  |  |  |
| 7.00    | 123             | 103 | 118 | 100 | 114 | 98  | 110 | 96 | 118 | 102 | 114 | 99  | 110 | 97  | 107 | 95 | 110 | 99  | 107 | 97 | 104 | 95 | 101 | 93 | 103 | 96 | 100 | 95 | 98  | 93 | 96  | 91 | 91 | 89 |  |  |  |  |
| 10.00   | 125             | 105 | 122 | 103 | 119 | 101 | 116 | 99 | 120 | 103 | 118 | 102 | 115 | 100 | 112 | 98 | 112 | 101 | 110 | 99 | 108 | 98 | 106 | 97 | 105 | 98 | 103 | 97 | 102 | 96 | 100 | 95 | 94 | 92 |  |  |  |  |

JIS C 8030:2014

三菱電機照明株式会社