


	MY-H410540/N
	2AHTN




○配光曲線図 (cd/1000lm)

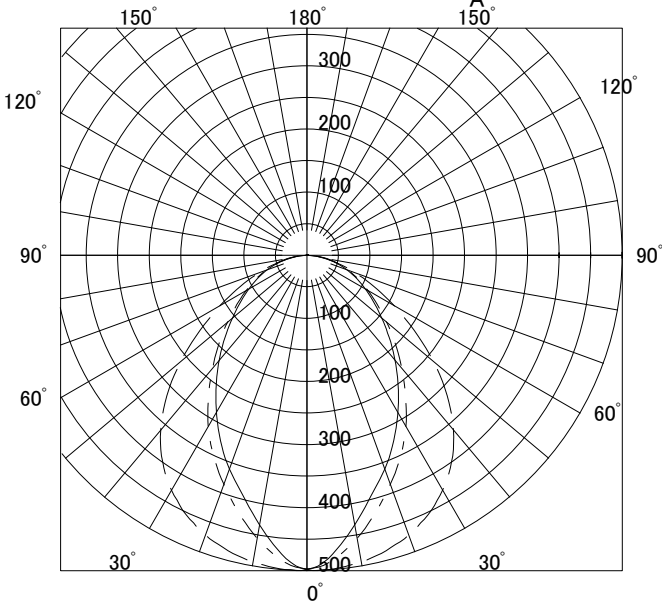

○諸特性

光源		LED9520lm(定格モード)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.37m	1.84m	2.30m	2.75m	
	B-B	2.12m	2.68m	3.28m	3.90m	
器具効率	上方光束	下方光束		計		
	0.5%	99.5%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○直射水平面照度

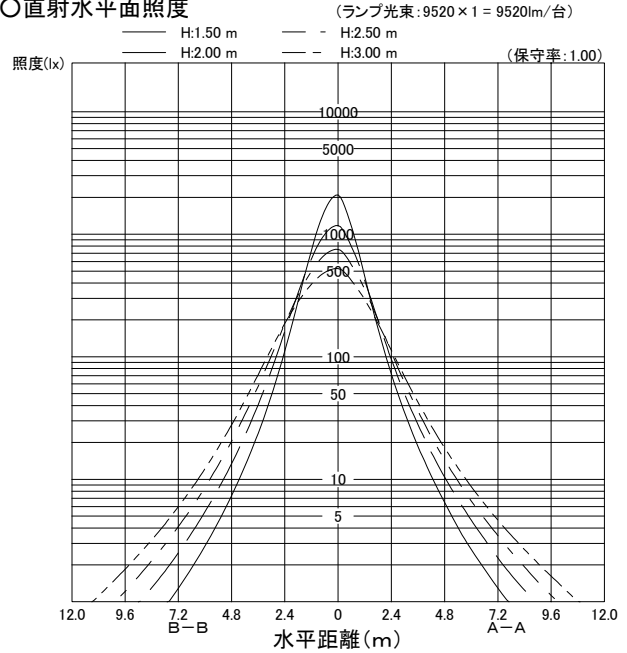

反射率(%)			作業面照明率(×0.01)												
			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	48	64	76	84	92	97	105	110	113	117	120	123	126
		10	45	59	69	76	82	86	91	95	97	100	102	104	105
	50	30	35	50	62	71	79	86	95	101	105	111	115	119	123
		10	33	48	58	65	73	78	85	89	92	96	98	101	103
70	70	30	27	42	53	61	70	77	86	93	98	105	110	115	120
		10	27	40	51	58	66	71	79	84	88	92	95	99	102
	50	30	27	41	52	60	69	75	85	91	96	102	106	112	116
		10	27	40	50	58	65	71	78	83	87	92	94	98	101
50	50	30	33	48	59	66	74	80	88	93	96	101	104	108	111
		10	32	46	56	63	70	75	81	86	89	93	95	98	100
	30	30	27	41	51	59	67	73	81	87	91	97	101	105	109
		10	26	40	49	57	64	69	77	82	85	90	93	96	99
30	30	26	40	50	58	65	71	78	84	87	92	95	99	102	
	10	26	39	49	56	63	68	76	80	84	88	91	94	97	
0	0	0	21	33	42	50	57	62	70	75	78	83	86	90	93