


	MY-H430040/N
	AHZ




○諸特性		LED2740lm N				
最大 取付 間隔	光源	LED2740lm N				
	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.66m	2.19m	2.73m	3.26m	
	B-B	2.07m	2.58m	3.16m	3.74m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

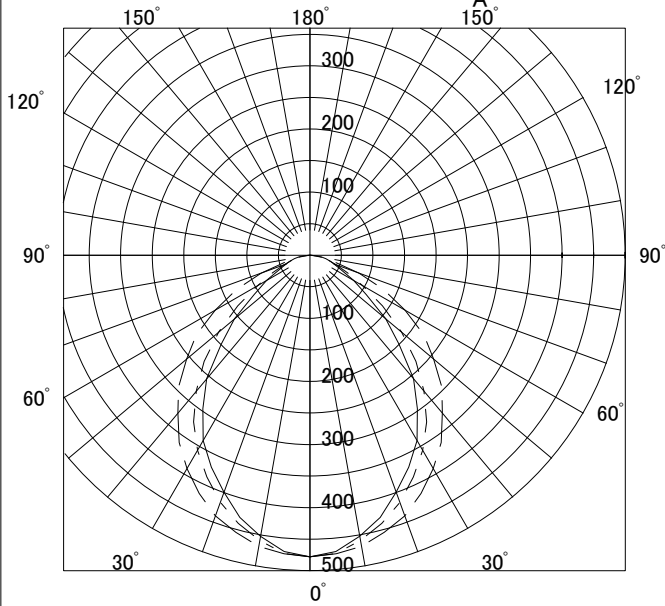

○直射水平面照度

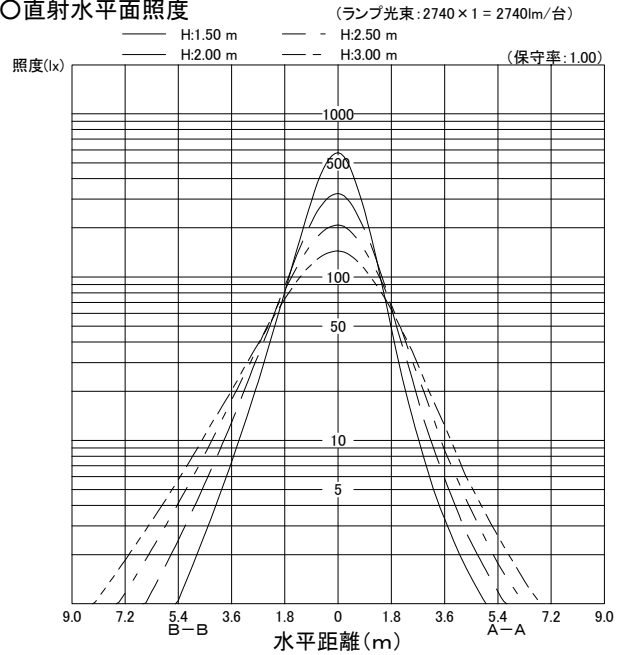

反射率(%)		作業面照明率(×0.01)													
		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	49	68	78	87	95	100	107	112	115	119	121	124	126
		10	46	63	71	78	85	88	93	97	99	101	103	104	106
	50	30	37	55	65	74	83	89	97	104	107	113	116	120	123
		10	35	52	61	69	77	81	87	92	94	98	100	102	104
70	70	30	29	47	56	65	75	80	90	97	101	107	112	117	121
		10	29	45	54	62	70	75	82	87	90	94	97	100	103
	50	30	29	46	55	64	74	79	88	95	99	105	108	113	117
		10	29	45	53	61	70	74	81	86	89	94	96	99	102
50	70	30	24	40	48	57	65	70	77	83	86	91	94	98	100
		10	24	40	48	57	65	70	77	83	86	91	94	98	100
	50	30	35	53	61	70	79	83	90	96	99	103	106	109	111
		10	34	51	59	66	74	78	84	89	91	94	97	99	101
30	30	30	29	46	54	63	72	77	85	91	94	99	103	107	110
	10	28	45	53	61	69	73	80	85	88	92	94	97	100	
	10	10	24	40	48	56	65	69	76	82	85	90	93	96	98
0	30	30	28	45	53	62	70	74	82	87	90	95	98	101	103
	10	10	28	44	52	60	68	72	79	84	86	90	93	96	98
	10	10	24	40	48	56	64	69	76	81	84	88	91	94	97
0	0	0	23	38	46	54	62	66	73	79	82	86	89	92	94