


|        |                   |    |  |      |
|--------|-------------------|----|--|------|
| 形名     | MY-L470331/N VCTZ | 電源 |  | ○諸特性 |
| 出力     | 段調光               | 温度 |  |      |
| モード    | 定格                |    |  |      |
| オプション1 |                   |    |  |      |
| オプション2 |                   |    |  |      |
| オプション3 |                   |    |  |      |
| オプション4 |                   |    |  |      |
| オプション5 |                   |    |  |      |




|                |      |       |       |        |       |    |       |
|----------------|------|-------|-------|--------|-------|----|-------|
| 光源             |      | LED   |       |        |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H     |       |        |       |    |       |
|                | A-A' | 1.3 H |       |        |       |    |       |
|                | B-B' | 1.3 H |       |        |       |    |       |
| 器具効率           |      | 上方光束  | 下方光束  | 計      |       |    |       |
|                |      | 4.5%  | 95.5% | 100.0% |       |    |       |
| 保守率            |      | 良い    | 0.830 | 普通     | 0.810 | 悪い | 0.770 |

○配光曲線図 (cd/1000lm)

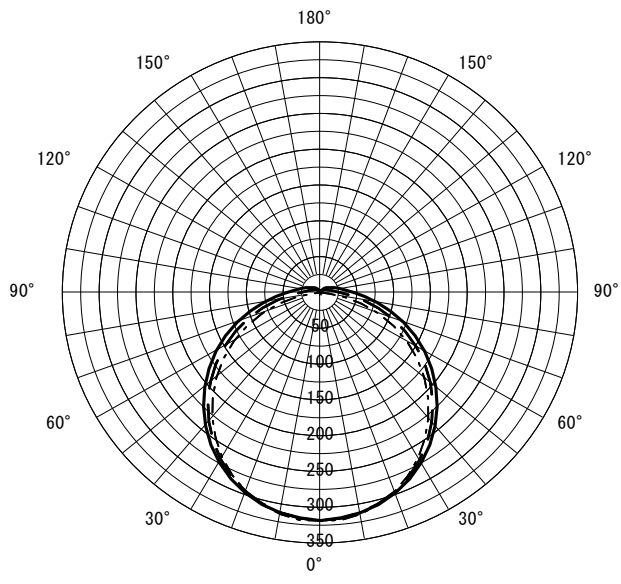

○直射水平面照度 (全光束: 6900 × 1 = 6900lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

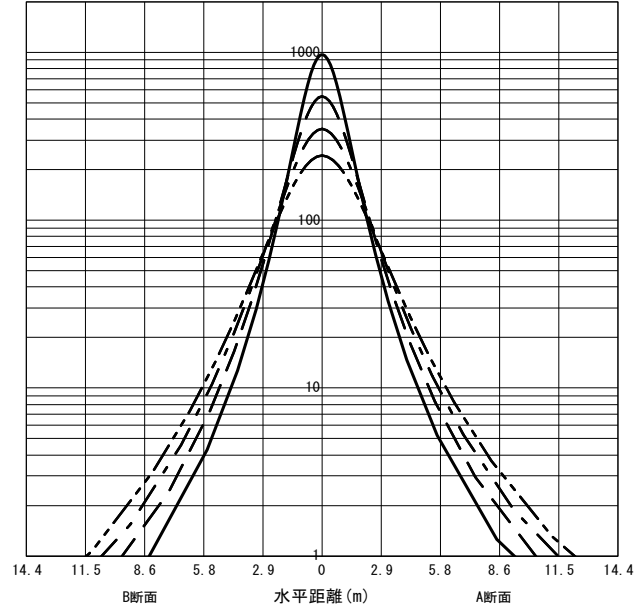

| 反射率 (%) |                 |     |     |     |     |    |     |    |     |     |     |     |     |    |     |    |     |    |     |    |     |    |     |    |     |    |    |    |    |    |    |    |    |    |    |    |    |   |
|---------|-----------------|-----|-----|-----|-----|----|-----|----|-----|-----|-----|-----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| 天井      | 80              |     |     |     |     |    |     |    | 70  |     |     |     |     |    |     |    | 50  |    |     |    |     |    |     |    | 30  |    |    |    |    |    |    |    | 20 | 0  |    |    |    |   |
| 壁       | 70              | 50  | 30  | 10  | 70  | 50 | 30  | 10 | 70  | 50  | 30  | 10  | 70  | 50 | 30  | 10 | 70  | 50 | 30  | 10 | 70  | 50 | 30  | 10 | 70  | 50 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |    |   |
| 床       | 30              | 10  | 30  | 10  | 30  | 10 | 30  | 10 | 30  | 10  | 30  | 10  | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 |
| 室指数     | 作業面照度率 (× 0.01) |     |     |     |     |    |     |    |     |     |     |     |     |    |     |    |     |    |     |    |     |    |     |    |     |    |    |    |    |    |    |    |    |    |    |    |    |   |
| 0.60    | 61              | 56  | 46  | 44  | 37  | 36 | 31  | 31 | 59  | 55  | 45  | 43  | 37  | 36 | 31  | 30 | 55  | 52 | 43  | 42 | 36  | 35 | 30  | 30 | 52  | 49 | 42 | 40 | 35 | 34 | 30 | 30 | 29 | 27 |    |    |    |   |
| 0.80    | 73              | 66  | 58  | 54  | 48  | 46 | 42  | 41 | 70  | 64  | 57  | 53  | 48  | 46 | 41  | 40 | 65  | 61 | 54  | 52 | 46  | 45 | 41  | 40 | 61  | 58 | 52 | 50 | 45 | 44 | 40 | 39 | 39 | 37 |    |    |    |   |
| 1.00    | 81              | 73  | 66  | 62  | 57  | 54 | 50  | 48 | 78  | 71  | 65  | 61  | 56  | 53 | 49  | 48 | 72  | 67 | 62  | 58 | 54  | 52 | 48  | 47 | 68  | 64 | 59 | 56 | 52 | 51 | 47 | 46 | 46 | 43 |    |    |    |   |
| 1.25    | 88              | 78  | 75  | 69  | 65  | 61 | 58  | 55 | 85  | 76  | 73  | 67  | 64  | 60 | 57  | 55 | 79  | 73 | 69  | 65 | 61  | 59 | 56  | 54 | 74  | 69 | 65 | 63 | 59 | 57 | 54 | 53 | 53 | 50 |    |    |    |   |
| 1.50    | 94              | 83  | 81  | 74  | 72  | 67 | 65  | 61 | 90  | 81  | 79  | 72  | 70  | 66 | 63  | 60 | 84  | 77 | 74  | 70 | 67  | 64 | 61  | 59 | 78  | 73 | 70 | 67 | 64 | 62 | 60 | 58 | 58 | 55 |    |    |    |   |
| 2.00    | 101             | 88  | 90  | 81  | 82  | 74 | 75  | 69 | 97  | 86  | 87  | 79  | 80  | 73 | 73  | 69 | 90  | 82 | 82  | 76 | 76  | 71 | 70  | 67 | 84  | 79 | 77 | 74 | 72 | 69 | 68 | 66 | 65 | 63 |    |    |    |   |
| 2.50    | 106             | 92  | 96  | 85  | 89  | 80 | 82  | 75 | 102 | 90  | 93  | 84  | 86  | 79 | 80  | 74 | 94  | 86 | 87  | 81 | 82  | 76 | 77  | 73 | 88  | 82 | 82 | 78 | 77 | 74 | 73 | 71 | 70 | 68 |    |    |    |   |
| 3.00    | 110             | 94  | 101 | 88  | 94  | 84 | 88  | 79 | 105 | 92  | 98  | 87  | 91  | 82 | 85  | 78 | 97  | 88 | 91  | 84 | 86  | 80 | 81  | 77 | 90  | 85 | 86 | 81 | 81 | 78 | 78 | 75 | 74 | 71 |    |    |    |   |
| 4.00    | 114             | 97  | 107 | 93  | 101 | 89 | 96  | 85 | 110 | 95  | 103 | 91  | 98  | 87 | 93  | 84 | 101 | 92 | 96  | 88 | 92  | 85 | 88  | 82 | 94  | 88 | 90 | 85 | 87 | 83 | 83 | 80 | 79 | 76 |    |    |    |   |
| 5.00    | 117             | 99  | 111 | 95  | 106 | 92 | 101 | 89 | 112 | 97  | 107 | 94  | 102 | 91 | 98  | 88 | 104 | 94 | 100 | 91 | 96  | 88 | 92  | 86 | 96  | 90 | 93 | 88 | 90 | 86 | 87 | 83 | 82 | 80 |    |    |    |   |
| 7.00    | 121             | 102 | 116 | 99  | 112 | 96 | 108 | 93 | 116 | 100 | 112 | 97  | 108 | 95 | 104 | 92 | 107 | 96 | 103 | 94 | 101 | 92 | 98  | 90 | 99  | 93 | 96 | 91 | 94 | 89 | 92 | 87 | 86 | 84 |    |    |    |   |
| 10.00   | 123             | 103 | 120 | 101 | 117 | 99 | 114 | 97 | 118 | 101 | 115 | 100 | 112 | 98 | 110 | 96 | 109 | 98 | 107 | 96 | 104 | 95 | 102 | 93 | 101 | 95 | 99 | 93 | 97 | 92 | 96 | 91 | 90 | 87 |    |    |    |   |

JIS C 8030:2014

三菱電機照明株式会社