


形名	MY-LK430330C/W AHZ	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1			通常時	
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大取付間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		4.8%	95.2%	100.0%			
保守率		良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

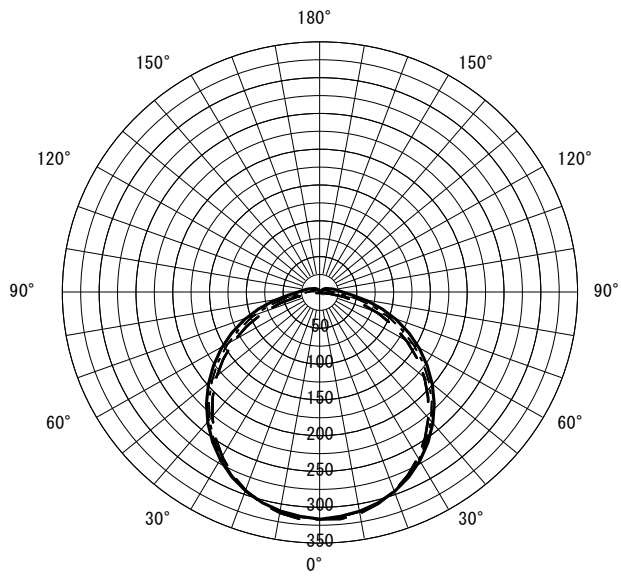

○直射水平面照度 (全光束: 2820 × 1 = 2820lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

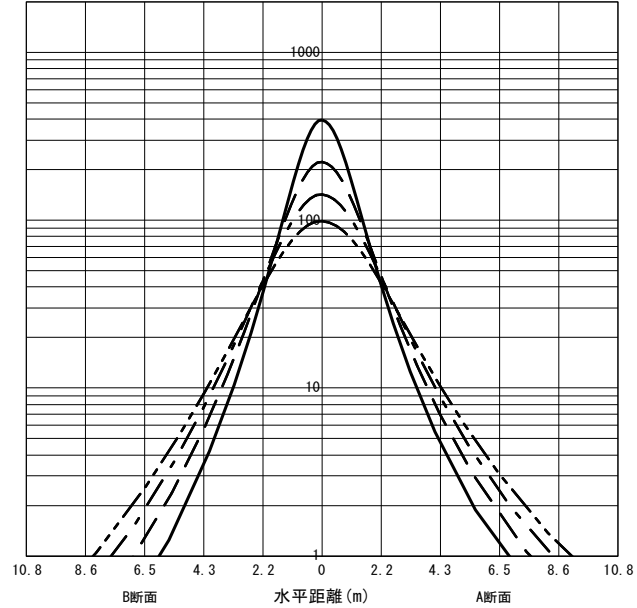

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																	
0.60	61	56	46	44	37	36	31	31	59	55	45	43	37	36	31	30	55	52	43	42	36	35	30	30	52	49	42	40	35	34	30	30	29	27
0.80	73	66	58	54	48	46	42	41	70	64	56	53	48	46	41	40	65	61	54	51	46	45	40	40	61	58	52	50	45	44	40	39	39	37
1.00	81	72	66	62	57	54	50	48	78	71	65	60	56	53	49	48	72	67	62	58	54	52	48	47	68	64	59	56	52	51	47	46	46	43
1.25	88	78	75	69	65	61	58	55	85	76	73	67	64	60	57	55	79	73	69	65	61	59	56	54	73	69	65	63	59	57	54	53	53	50
1.50	94	83	81	74	72	66	65	61	90	80	79	72	70	66	63	60	83	77	74	70	67	64	61	59	78	73	70	67	64	62	59	58	58	55
2.00	101	88	90	81	82	74	75	69	97	86	87	79	79	73	73	68	90	82	82	76	76	71	70	67	84	79	77	74	72	69	68	66	65	62
2.50	106	92	96	85	88	80	82	75	102	90	93	84	86	78	80	74	94	86	87	81	81	76	77	72	87	82	82	78	77	74	73	71	70	67
3.00	110	94	101	88	94	83	88	79	105	92	97	87	91	82	85	78	97	88	91	84	86	80	81	76	90	85	85	81	81	78	78	75	74	71
4.00	114	97	107	93	101	89	96	85	110	95	103	91	98	87	93	84	101	92	96	88	92	85	88	82	94	88	90	85	86	82	83	80	79	76
5.00	117	99	111	95	106	92	101	89	112	97	107	94	102	91	98	88	104	94	99	91	96	88	92	85	96	90	93	88	90	85	87	83	82	79
7.00	121	102	116	99	112	96	108	93	116	100	112	97	108	94	104	92	107	96	103	94	100	92	98	90	99	93	96	91	94	89	92	87	86	83
10.00	123	103	120	101	117	99	114	97	118	101	115	99	112	98	110	96	109	98	106	96	104	95	102	93	101	94	99	93	97	92	96	91	89	86

JIS C 8030:2014

三菱電機照明株式会社