


形名	MY-LK430331/W AHZ	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1			通常時	
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		4.4%	87.9%	92.3%			
保守率		良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

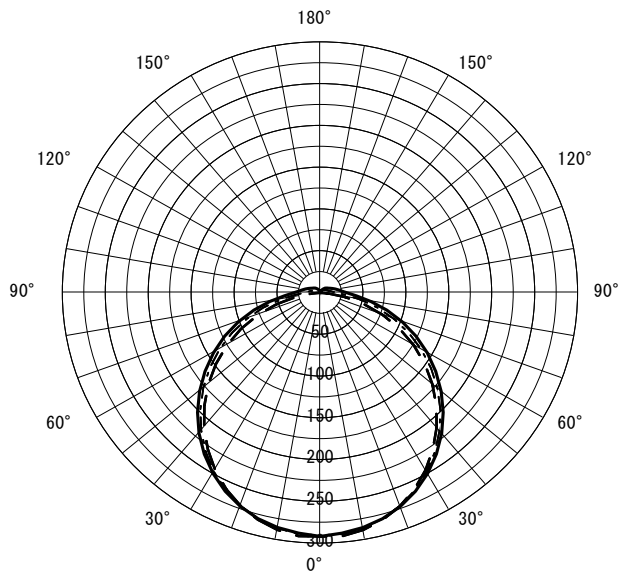

○直射水平面照度 (全光束: 2820 × 1 = 2820lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

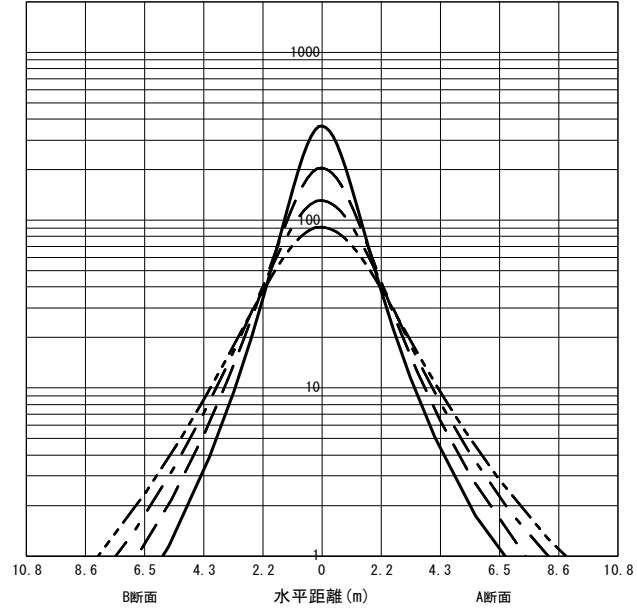

反射率 (%)																																		
天井	80								70								50								30								20	0
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照度率 (× 0.01)																																	
0.60	56	52	42	40	34	33	29	28	54	50	42	40	34	33	28	28	51	48	40	38	33	32	28	28	48	45	38	37	32	31	27	27	27	25
0.80	67	61	53	50	45	43	38	37	65	59	52	49	44	42	38	37	60	56	50	48	43	41	37	37	56	53	48	46	41	40	37	36	36	34
1.00	74	67	61	57	52	50	46	44	72	65	60	56	51	49	45	44	67	62	57	54	50	48	44	43	62	59	54	52	48	47	43	43	42	40
1.25	81	72	69	63	60	56	54	51	78	71	67	62	59	56	53	51	73	67	64	60	57	54	51	50	68	64	60	58	54	53	50	49	48	46
1.50	86	76	75	68	66	61	60	56	83	74	73	67	65	61	59	56	77	71	69	64	62	59	57	55	72	67	65	62	59	57	55	54	53	51
2.00	94	81	83	74	75	69	69	64	90	79	81	73	73	68	68	63	83	76	76	70	70	66	65	62	77	73	71	68	67	64	62	61	60	58
2.50	98	85	89	79	82	74	76	69	94	83	86	77	79	72	74	68	87	79	81	74	75	70	71	67	81	76	76	72	71	68	68	65	65	62
3.00	101	87	93	82	87	77	81	73	97	85	90	80	84	76	79	72	90	81	84	77	79	74	75	71	83	78	79	75	75	72	72	69	68	66
4.00	106	90	99	86	93	82	88	78	101	88	95	84	90	81	86	78	93	85	89	81	85	78	81	76	87	81	83	79	80	76	77	74	73	70
5.00	108	92	103	88	98	85	93	82	104	90	99	87	94	84	90	81	96	86	92	84	88	81	85	79	89	83	86	81	83	79	80	77	76	73
7.00	111	94	107	91	103	89	100	86	107	92	103	90	99	87	96	85	98	89	95	87	93	85	90	83	91	85	89	84	87	82	85	81	80	77
10.00	114	95	111	93	108	92	105	90	109	94	106	92	104	90	101	89	100	90	98	89	96	87	94	86	93	87	91	86	90	85	88	84	83	80

JIS C 8030:2014

三菱電機照明株式会社