



形名	MY-N425333/N VCTZ	電源		○諸特性
出力	段調光	温度		
モード	定格			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		16.6%	83.4%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

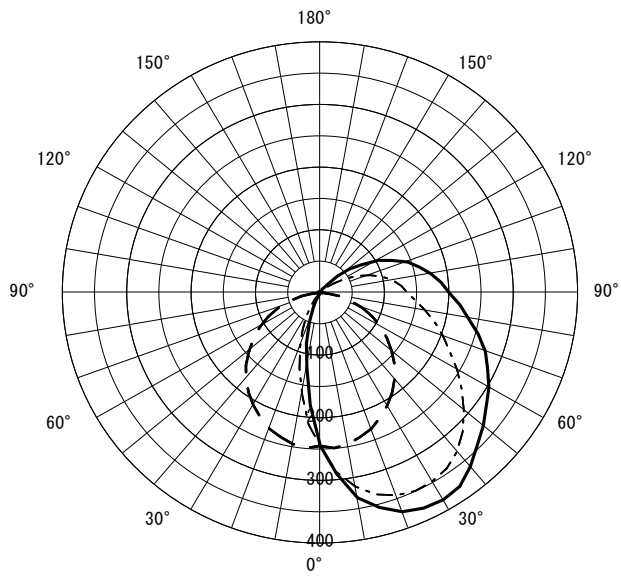

○直射水平面照度 (全光束: 2180 × 1 = 2180lm/台)

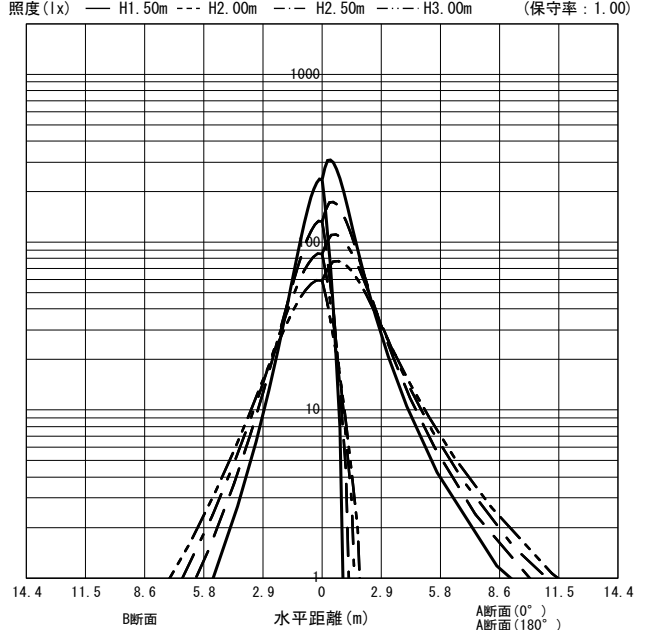

反射率 (%)																																																		
天井	80								70								50								30								20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																																	
0.60	57	52	42	40	33	32	27	26	54	50	40	38	32	31	26	26	49	46	37	36	30	29	25	25	45	42	35	34	28	28	24	24	23	20																
0.80	68	61	52	49	43	41	36	35	64	59	50	48	41	40	35	34	58	54	47	45	39	38	33	33	53	50	43	42	37	36	32	31	31	28																
1.00	75	68	60	56	50	48	43	41	71	65	58	54	49	46	42	41	64	59	53	51	46	44	40	39	58	55	49	47	43	42	38	37	36	33																
1.25	82	73	68	63	58	55	51	48	78	70	65	60	56	53	49	47	70	65	60	57	52	50	46	45	63	60	55	53	49	47	44	43	42	38																
1.50	88	77	74	67	64	60	57	54	83	74	71	65	62	58	55	52	74	68	65	61	58	55	52	50	67	63	59	57	53	52	49	47	46	42																
2.00	95	83	83	74	74	67	66	62	90	80	79	72	71	65	64	60	81	74	72	67	66	62	60	57	72	68	66	63	60	58	56	54	53	49																
2.50	100	87	90	79	81	73	74	67	95	83	85	76	77	71	71	66	85	77	77	71	71	67	66	62	76	71	70	67	65	63	61	59	58	53																
3.00	104	89	94	82	86	77	79	72	98	86	90	80	82	74	76	70	88	80	81	75	75	70	70	66	79	74	74	70	69	66	65	63	61	57																
4.00	109	93	101	87	94	82	87	78	103	89	96	84	89	80	84	76	92	83	86	79	81	75	77	72	82	77	78	74	74	71	71	68	66	61																
5.00	112	95	105	90	99	86	93	82	106	91	99	87	94	83	89	80	94	85	90	82	85	79	82	76	85	79	81	77	78	74	75	71	69	65																
7.00	116	97	110	94	105	90	100	87	109	94	104	91	100	88	96	85	98	88	94	85	91	83	87	80	88	82	85	80	82	78	80	76	74	69																
10.00	119	99	114	97	111	94	107	91	112	96	108	94	105	91	102	89	100	90	97	88	95	86	92	84	90	84	88	83	86	81	84	79	77	72																

JIS C 8030:2014

三菱電機照明株式会社