


形名	MY-N430331/W AHZ	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		8.4%	91.6%	100.0%			
保守率		良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

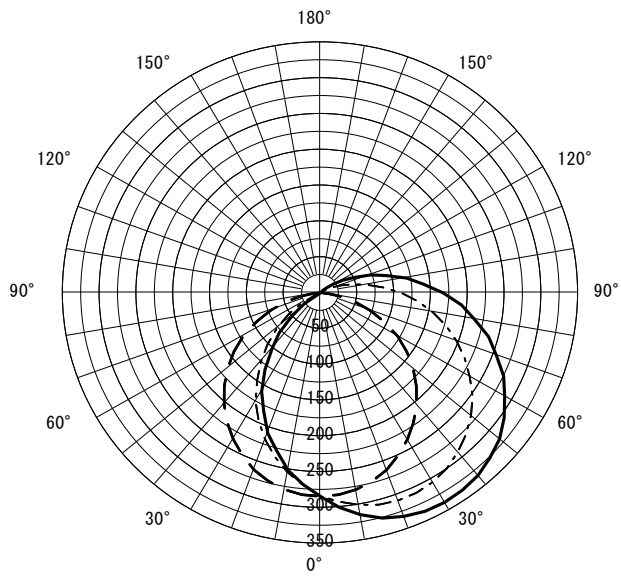

○直射水平面照度 (全光束: 2650 × 1 = 2650lm/台)

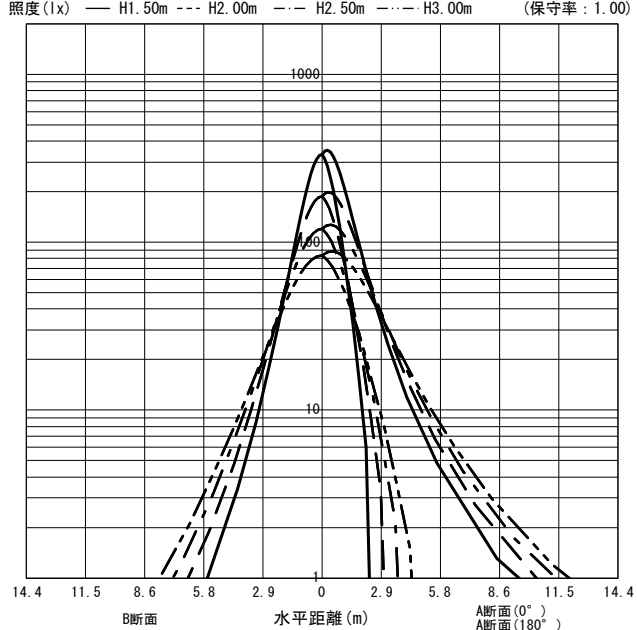

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																	
0.60	59	54	44	42	35	34	29	29	57	53	43	41	34	34	29	28	53	49	41	39	33	33	28	28	49	46	39	38	32	32	27	27	27	25
0.80	70	64	55	52	46	44	39	38	68	62	54	51	45	43	38	38	62	58	51	49	43	42	37	37	58	55	48	47	41	40	36	36	35	33
1.00	78	70	64	59	54	51	46	45	75	68	62	58	52	50	46	44	69	64	58	55	50	48	44	43	64	60	55	53	48	47	43	42	42	39
1.25	86	76	72	66	62	58	54	52	82	74	69	64	60	57	53	51	75	69	65	61	57	55	51	50	69	65	61	59	55	53	50	49	48	45
1.50	91	80	78	71	68	63	61	57	87	78	75	69	66	62	59	56	80	73	70	66	63	60	57	55	73	69	66	63	60	58	55	53	53	50
2.00	98	86	87	77	78	71	70	65	94	83	84	76	75	69	69	64	86	79	78	72	71	67	65	62	79	74	72	69	67	64	62	61	60	56
2.50	103	89	93	82	84	76	77	71	99	87	89	80	82	75	75	70	90	82	83	77	77	72	71	68	83	78	77	73	72	69	68	66	65	61
3.00	107	92	98	85	90	80	83	75	102	89	94	83	87	78	81	74	93	85	87	80	81	75	76	72	85	80	80	76	76	73	72	69	68	65
4.00	112	95	104	90	97	85	91	81	107	93	100	88	94	84	88	80	97	88	92	84	87	80	83	77	89	84	85	80	81	77	78	75	73	70
5.00	115	97	108	93	102	89	97	85	109	95	103	91	98	87	93	84	100	90	95	87	91	84	87	81	91	86	88	83	85	80	82	78	77	73
7.00	118	100	113	96	108	93	104	90	113	97	108	94	104	91	100	88	103	93	99	90	96	88	93	85	94	89	92	86	89	84	87	82	81	77
10.00	121	102	117	99	114	97	110	94	116	99	112	97	109	95	106	93	105	95	103	93	100	91	98	89	97	91	95	89	93	88	91	86	84	81

JIS C 8030:2014

三菱電機照明株式会社