


形名	MY-N430340/N AHTN	電源		○諸特性
出力	段調光	温度		
モード	節電			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		9.9%	90.1%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

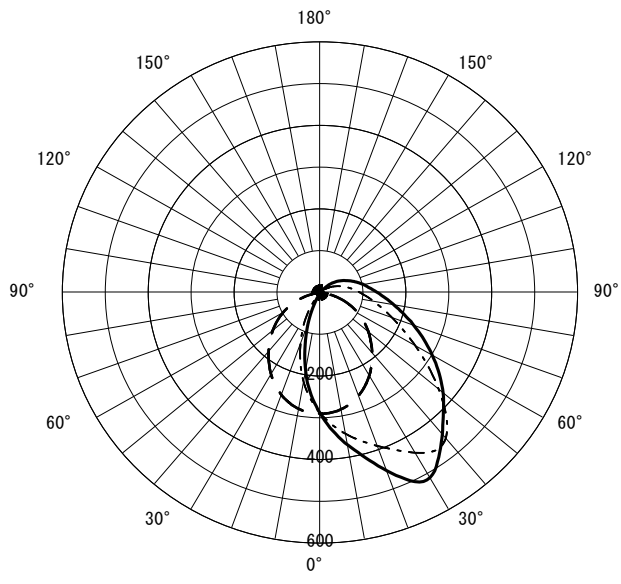

○直射水平面照度 (全光束 : 2090 × 1 = 2090lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · - H3.00m (保守率 : 1.00)

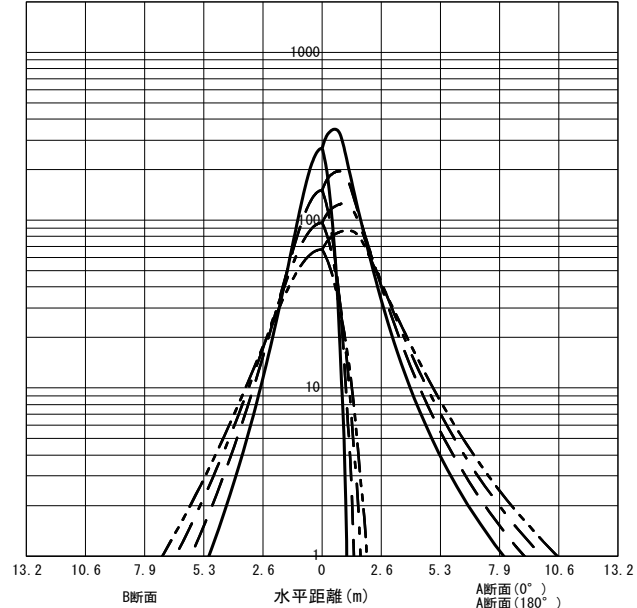

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (×0.01)																																					
0.60	59	55	45	42	36	35	30	29	57	53	43	41	35	34	29	29	53	50	41	40	34	33	28	28	49	46	39	38	32	32	28	27	27	25				
0.80	71	64	56	53	47	45	40	39	68	62	55	51	46	44	39	38	63	58	51	49	44	42	38	37	58	55	49	47	42	41	37	37	36	34				
1.00	79	71	65	60	55	52	48	46	76	69	63	58	53	51	47	45	69	64	59	56	51	49	45	44	64	60	55	53	49	48	44	43	42	40				
1.25	86	77	73	67	63	59	56	53	82	74	70	65	61	58	55	52	76	70	66	62	58	56	52	51	70	66	62	59	55	54	50	49	49	46				
1.50	92	81	79	71	69	64	62	59	88	78	76	70	67	63	61	58	80	74	71	66	64	61	58	56	74	69	66	63	60	58	56	54	53	50				
2.00	99	86	88	78	79	72	72	67	95	84	84	76	76	70	70	65	86	79	78	73	72	68	66	63	79	74	73	69	68	65	63	61	60	57				
2.50	104	90	94	83	86	77	79	72	99	87	90	81	83	76	77	71	90	82	83	77	77	73	72	69	83	78	77	73	73	70	69	66	65	62				
3.00	107	92	98	86	91	81	84	76	102	90	94	84	88	79	82	75	93	85	87	80	82	76	77	72	85	80	81	76	76	73	73	70	69	65				
4.00	112	95	105	90	98	86	92	82	107	93	100	88	94	84	89	81	97	88	92	84	88	81	83	78	89	83	85	80	81	78	78	75	74	70				
5.00	115	97	109	93	103	89	98	86	110	95	104	91	99	88	94	84	100	90	95	87	91	84	88	81	91	86	88	83	85	81	82	78	77	73				
7.00	119	100	114	96	109	94	105	91	113	97	108	94	104	92	101	89	103	93	99	90	96	88	93	86	94	88	91	86	89	84	87	82	81	77				
10.00	121	102	118	99	114	97	111	95	116	99	112	97	109	95	106	93	105	94	103	93	100	91	98	89	96	90	94	89	92	87	90	86	84	80				

JIS C 8030:2014

三菱電機照明株式会社