


|        |                   |    |  |      |
|--------|-------------------|----|--|------|
| 形名     | MY-N470332/N VCTZ | 電源 |  | ○諸特性 |
| 出力     | 段調光               | 温度 |  |      |
| モード    | 節電                |    |  |      |
| オプション1 |                   |    |  |      |
| オプション2 |                   |    |  |      |
| オプション3 |                   |    |  |      |
| オプション4 |                   |    |  |      |
| オプション5 |                   |    |  |      |




|        |      |       |       |        |       |    |       |
|--------|------|-------|-------|--------|-------|----|-------|
| 光源     |      | LED   |       |        |       |    |       |
| 最大取付間隔 | 高さ   | H     |       |        |       |    |       |
|        | A-A' | 1.4 H |       |        |       |    |       |
|        | B-B' | 1.2 H |       |        |       |    |       |
| 器具効率   |      | 上方光束  | 下方光束  | 計      |       |    |       |
|        |      | 15.7% | 84.3% | 100.0% |       |    |       |
| 保守率    |      | 良い    | 0.810 | 普通     | 0.770 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

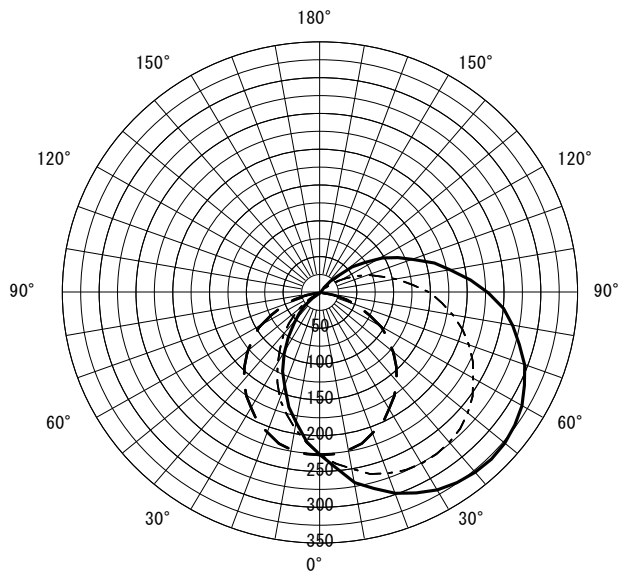

○直射水平面照度 (全光束: 4610 × 1 = 4610lm/台)

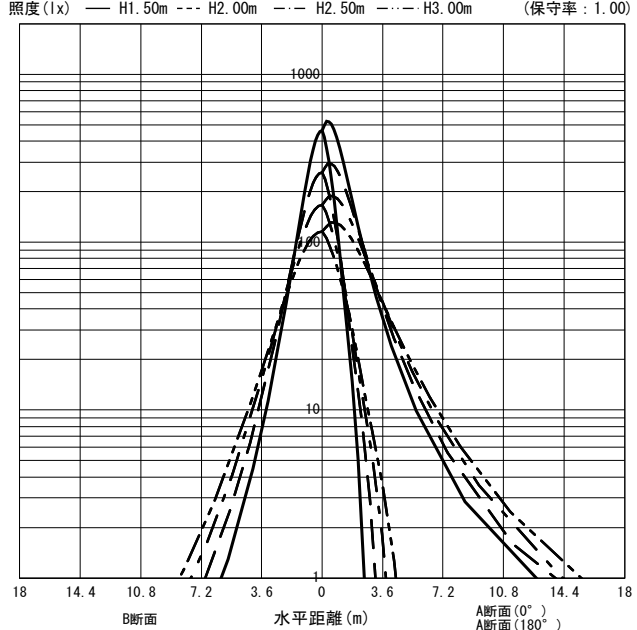

| 反射率 (%) |                 |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|-----------------|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 天井      | 80              |    |     |    | 70  |    |     |    | 50  |    |     |    | 30  |    |     |    | 20  | 0  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 壁       | 70              | 50 | 30  | 10 | 70  | 50 | 30  | 10 | 70  | 50 | 30  | 10 | 70  | 50 | 30  | 10 | 70  | 50 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |    |    |    |    |    |    |
| 床       | 30              | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |
| 室指数     | 作業面照明率 (× 0.01) |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0.60    | 56              | 52 | 41  | 39 | 32  | 31 | 26  | 25 | 54  | 50 | 40  | 38 | 31  | 30 | 25  | 25 | 49  | 46 | 37 | 36 | 29 | 29 | 24 | 24 | 44 | 42 | 34 | 33 | 28 | 27 | 23 | 23 | 22 | 20 |
| 0.80    | 67              | 61 | 52  | 49 | 42  | 40 | 35  | 34 | 64  | 58 | 50  | 47 | 41  | 39 | 34  | 33 | 58  | 54 | 46 | 44 | 38 | 37 | 33 | 32 | 52 | 49 | 43 | 41 | 36 | 35 | 31 | 31 | 30 | 27 |
| 1.00    | 75              | 67 | 60  | 55 | 50  | 47 | 42  | 41 | 71  | 64 | 57  | 54 | 48  | 46 | 41  | 40 | 64  | 59 | 53 | 50 | 45 | 43 | 39 | 38 | 58 | 55 | 49 | 47 | 42 | 41 | 37 | 36 | 36 | 32 |
| 1.25    | 82              | 73 | 68  | 62 | 57  | 54 | 50  | 47 | 78  | 70 | 65  | 60 | 55  | 52 | 48  | 46 | 70  | 64 | 60 | 56 | 52 | 50 | 46 | 44 | 63 | 59 | 55 | 52 | 48 | 47 | 43 | 42 | 41 | 38 |
| 1.50    | 87              | 77 | 74  | 67 | 64  | 59 | 56  | 53 | 83  | 74 | 71  | 65 | 61  | 57 | 54  | 52 | 74  | 68 | 65 | 61 | 57 | 54 | 51 | 49 | 67 | 63 | 59 | 57 | 53 | 51 | 48 | 47 | 46 | 42 |
| 2.00    | 95              | 83 | 83  | 74 | 73  | 67 | 66  | 61 | 90  | 79 | 79  | 71 | 70  | 65 | 63  | 59 | 80  | 74 | 72 | 67 | 65 | 61 | 59 | 57 | 72 | 68 | 66 | 63 | 60 | 58 | 55 | 54 | 52 | 48 |
| 2.50    | 100             | 86 | 89  | 79 | 80  | 72 | 73  | 67 | 95  | 83 | 85  | 76 | 77  | 70 | 70  | 65 | 85  | 77 | 77 | 71 | 71 | 66 | 65 | 62 | 76 | 71 | 70 | 67 | 65 | 62 | 61 | 59 | 57 | 53 |
| 3.00    | 104             | 89 | 94  | 82 | 85  | 76 | 78  | 71 | 98  | 86 | 89  | 79 | 82  | 74 | 76  | 69 | 88  | 80 | 81 | 74 | 75 | 70 | 70 | 66 | 79 | 74 | 74 | 70 | 69 | 66 | 65 | 62 | 61 | 56 |
| 4.00    | 109             | 92 | 100 | 87 | 93  | 82 | 87  | 77 | 103 | 89 | 95  | 84 | 89  | 79 | 83  | 75 | 92  | 83 | 86 | 79 | 81 | 75 | 77 | 71 | 82 | 77 | 78 | 74 | 74 | 71 | 71 | 68 | 66 | 61 |
| 5.00    | 112             | 95 | 105 | 90 | 98  | 85 | 92  | 81 | 106 | 91 | 99  | 87 | 94  | 83 | 89  | 79 | 94  | 85 | 90 | 82 | 85 | 78 | 81 | 75 | 85 | 80 | 81 | 77 | 78 | 74 | 75 | 71 | 69 | 65 |
| 7.00    | 116             | 97 | 110 | 93 | 105 | 90 | 100 | 87 | 109 | 94 | 104 | 91 | 100 | 87 | 95  | 84 | 98  | 88 | 94 | 85 | 90 | 83 | 87 | 80 | 88 | 82 | 85 | 80 | 82 | 78 | 80 | 76 | 74 | 69 |
| 10.00   | 119             | 99 | 114 | 96 | 110 | 94 | 106 | 91 | 112 | 96 | 108 | 94 | 105 | 91 | 101 | 89 | 100 | 90 | 98 | 88 | 95 | 86 | 92 | 84 | 90 | 85 | 88 | 83 | 86 | 81 | 84 | 80 | 77 | 73 |

JIS C 8030:2014

三菱電機照明株式会社