


形名	MY-SC485100N/4 AHTX	電源		○諸特性
出力	段調光	温度		
モード	節電			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		4.4%	95.6%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

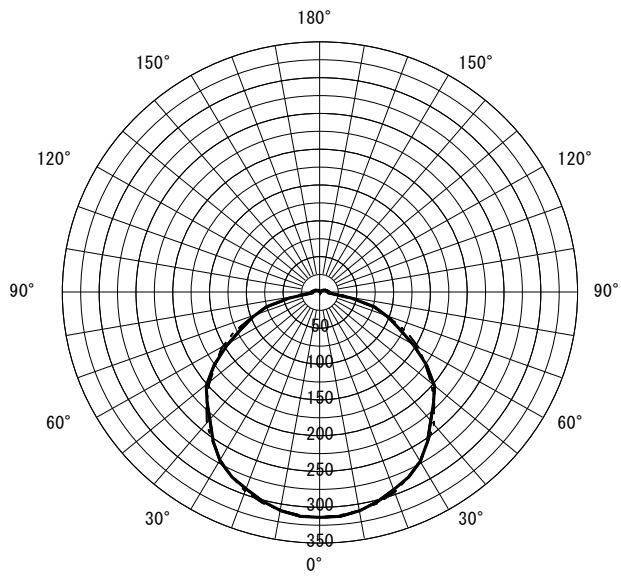

○直射水平面照度 (全光束: 6130 × 1 = 6130lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

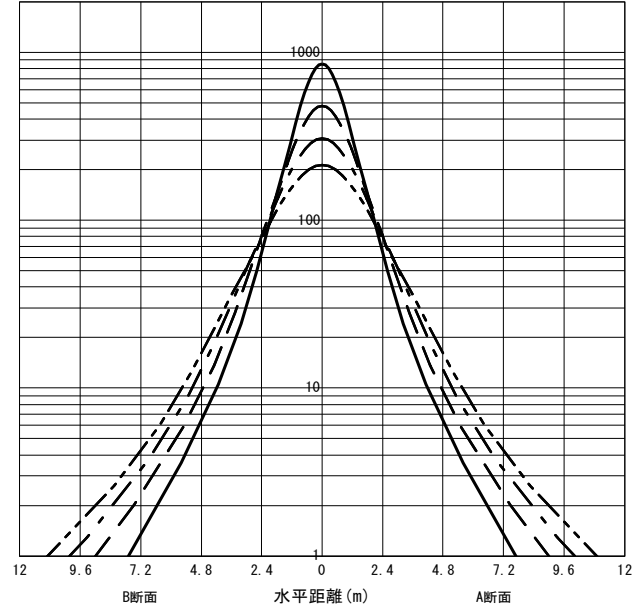

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	61	56	46	44	37	36	31	31	59	55	45	43	37	36	31	30	55	52	43	42	36	35	30	30	52	49	42	40	35	34	30	30	29	27				
0.80	73	66	58	54	48	47	42	41	70	64	57	54	48	46	41	41	66	61	54	52	46	45	41	40	61	58	52	50	45	44	40	39	39	37				
1.00	81	73	67	62	57	54	50	48	78	71	65	61	56	53	49	48	73	67	62	59	54	52	48	47	68	64	59	57	52	51	47	46	46	44				
1.25	89	79	75	69	66	61	58	56	85	77	73	68	64	61	58	55	79	73	69	65	62	59	56	54	74	70	66	63	60	58	55	53	53	51				
1.50	94	83	81	74	72	67	65	61	90	81	79	73	71	66	64	61	84	77	75	70	68	64	62	60	78	74	71	68	65	63	60	59	58	56				
2.00	102	88	91	81	82	75	75	70	98	86	88	80	80	74	74	69	90	83	83	77	76	72	71	68	84	79	78	74	73	70	68	66	66	63				
2.50	107	92	97	86	89	80	83	76	102	90	94	84	87	79	81	75	95	86	88	81	82	77	77	73	88	83	83	79	78	75	74	72	71	68				
3.00	110	95	102	89	94	84	88	80	106	93	98	87	92	83	86	79	98	89	92	84	87	81	82	77	91	85	86	82	82	78	78	76	75	72				
4.00	115	98	108	93	102	89	96	86	110	96	104	92	98	88	94	85	102	92	97	89	93	86	89	83	94	89	91	86	87	83	84	81	80	77				
5.00	118	100	112	96	106	93	102	90	113	98	108	94	103	91	99	88	104	94	100	91	96	89	93	86	97	91	93	88	91	86	88	84	83	80				
7.00	121	102	117	99	112	97	109	94	116	100	112	97	108	95	105	93	107	96	104	94	101	92	99	90	99	93	97	91	95	90	93	88	87	84				
10.00	124	104	120	102	117	100	114	98	119	102	116	100	113	98	110	96	109	98	107	97	105	95	103	94	101	95	100	94	98	93	96	91	90	87				

JIS C 8030:2014

三菱電機照明株式会社