



形名	MY-V425333/N VCTZ	電源		○諸特性
出力	段調光	温度		
モード	定格			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		4.1%	95.9%	100.0%			
保守率		良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

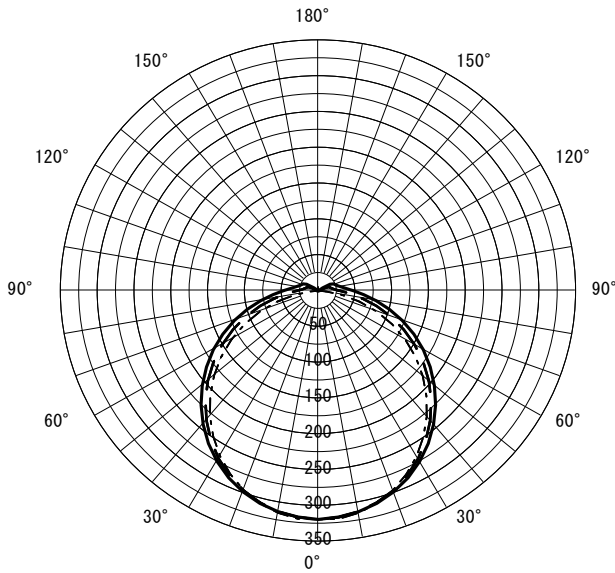

○直射水平面照度 (全光束: 2500 × 1 = 2500lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

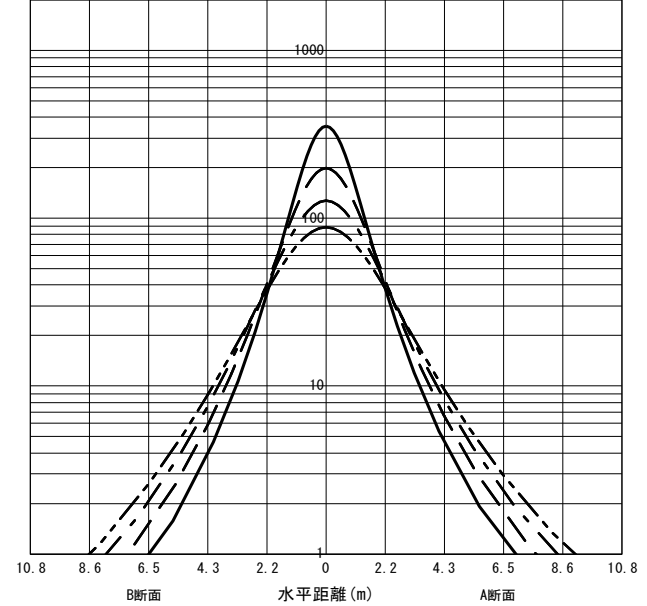

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	61	56	46	44	37	36	31	31	59	55	45	43	37	36	31	30	55	52	43	42	36	35	30	30	52	49	42	40	35	34	30	30	30	27				
0.80	73	66	58	54	48	46	42	41	70	64	57	53	48	46	41	40	66	61	54	52	46	45	41	40	62	58	52	50	45	44	40	39	39	37				
1.00	81	73	66	62	57	54	50	48	78	71	65	61	56	53	49	48	73	67	62	59	54	52	48	47	68	64	59	57	52	51	47	46	46	44				
1.25	88	79	75	69	65	61	58	55	85	77	73	67	64	60	57	55	79	73	69	65	62	59	56	54	74	70	66	63	59	58	54	53	53	50				
1.50	94	83	81	74	72	67	65	61	90	81	79	72	70	66	64	60	84	77	74	70	67	64	62	59	78	73	71	67	65	62	60	58	58	55				
2.00	101	88	90	81	82	74	75	69	97	86	87	79	80	73	73	69	90	82	82	77	76	72	71	67	84	79	78	74	72	70	68	66	65	63				
2.50	106	92	97	85	89	80	82	75	102	90	93	84	86	79	80	74	94	86	88	81	82	77	77	73	88	82	82	78	78	74	74	71	70	68				
3.00	110	94	101	89	94	84	88	79	105	92	98	87	91	82	86	78	97	89	91	84	86	80	82	77	91	85	86	81	82	78	78	75	74	72				
4.00	115	97	107	93	101	89	96	85	110	96	103	91	98	87	93	84	101	92	96	88	92	85	88	82	94	88	90	85	87	83	84	80	79	77				
5.00	117	99	111	96	106	92	101	89	113	97	107	94	102	91	98	88	104	94	100	91	96	88	93	86	96	91	93	88	90	86	88	84	83	80				
7.00	121	102	116	99	112	96	108	94	116	100	112	97	108	95	104	92	107	96	104	94	101	92	98	90	99	93	97	91	94	89	92	88	87	84				
10.00	124	103	120	101	117	99	114	97	118	102	115	100	112	98	110	96	109	98	107	97	105	95	103	94	101	95	99	94	98	92	96	91	90	87				

JIS C 8030:2014

三菱電機照明株式会社