


形名	MY-WH450430/N AHTN	電源		○諸特性
出力	段調光	温度		
モード	定格			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

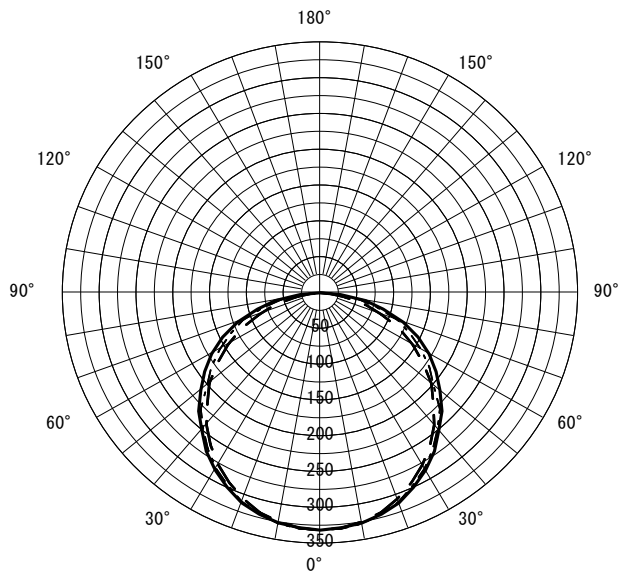

○直射水平面照度 (全光束: 4990 × 1 = 4990lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

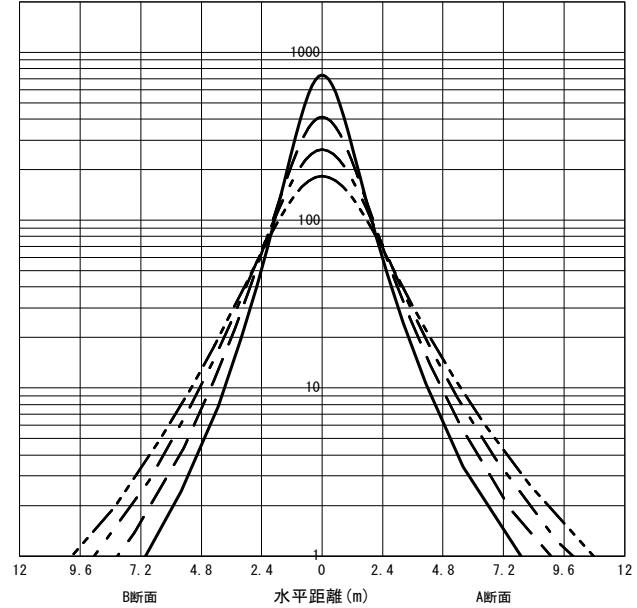

反射率 (%)																																		
天井	80								70								50								30								20	0
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																	
0.60	62	57	47	44	38	36	31	31	60	55	46	44	37	36	31	31	56	53	44	43	37	36	31	31	54	51	43	42	36	35	31	31	29	
0.80	73	67	59	55	49	47	42	41	71	65	58	54	49	47	42	41	67	62	55	53	47	46	42	41	63	60	54	52	46	45	41	41	39	
1.00	82	73	67	62	58	55	51	49	79	72	66	62	57	54	50	49	74	69	63	60	55	53	49	48	70	66	61	58	54	53	49	48	46	
1.25	89	79	76	70	66	62	59	56	86	78	74	69	65	62	58	56	81	75	71	67	63	61	57	56	76	72	68	65	61	60	56	55	53	
1.50	95	84	82	75	73	68	66	62	92	82	80	74	72	67	65	62	86	79	76	72	69	66	63	61	81	76	73	70	67	65	62	61	60	58
2.00	103	89	92	82	83	76	76	71	99	88	89	81	81	75	75	70	93	85	85	79	78	74	73	69	87	82	80	77	75	72	71	69	68	66
2.50	108	93	98	86	90	81	84	76	104	91	95	85	88	80	82	76	97	88	90	83	84	79	79	75	91	85	85	81	81	77	77	74	74	71
3.00	111	95	103	90	95	85	89	81	107	94	100	89	93	84	87	80	100	91	94	86	89	83	84	79	94	88	89	84	85	81	81	78	78	75
4.00	116	99	109	94	103	90	97	87	112	97	105	93	100	89	95	86	104	94	99	91	95	88	91	85	97	92	94	89	90	86	87	83	83	81
5.00	119	101	113	97	108	94	103	91	115	99	109	96	105	93	100	90	107	96	103	93	99	91	95	88	100	94	97	91	94	89	91	87	86	84
7.00	122	103	118	100	114	98	110	95	118	101	114	99	110	97	107	94	110	99	107	97	104	95	101	93	103	96	100	94	98	93	96	91	90	88
10.00	125	105	122	103	119	101	116	99	120	103	117	101	115	100	112	98	112	101	110	99	108	98	106	96	105	98	103	97	101	96	100	95	94	92

JIS C 8030:2014

三菱電機照明株式会社