


形名	MY-X470331/N VCTZ	電源		○諸特性
出力	段調光	温度		
モード	定格			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		7.4%	92.6%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

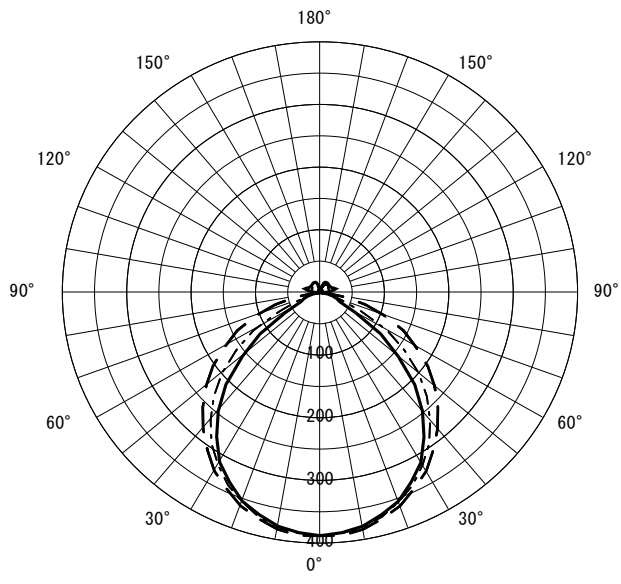

○直射水平面照度 (全光束: 6070 × 1 = 6070lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

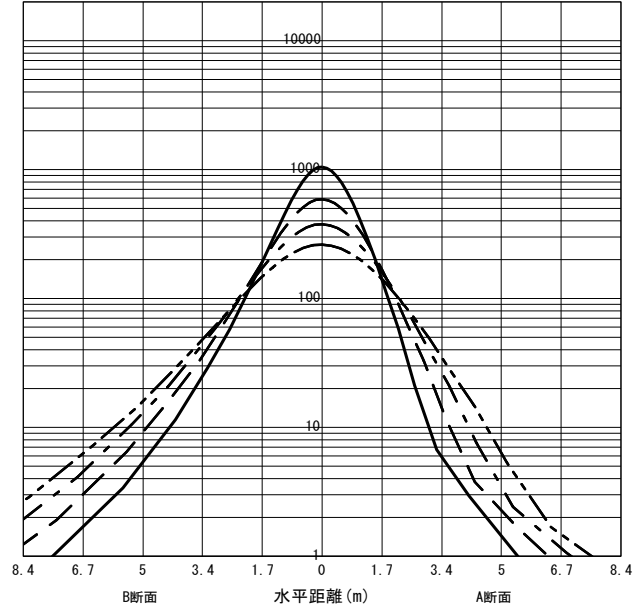

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	65	60	51	49	43	41	37	36	63	58	50	48	42	41	37	36	59	55	48	46	41	40	36	36	55	53	46	45	40	39	35	35	35	33				
0.80	77	70	64	60	55	53	49	47	74	68	62	59	54	52	48	47	70	65	59	57	52	51	47	46	65	62	57	55	51	49	46	45	45	43				
1.00	85	77	72	67	64	60	57	55	82	75	71	66	62	60	56	55	77	71	67	64	60	58	55	54	72	68	64	61	58	57	54	53	52	50				
1.25	93	82	81	74	72	68	66	63	89	80	78	73	71	67	65	62	83	77	74	70	68	65	63	61	78	73	71	68	65	63	61	60	59	57				
1.50	98	86	87	79	78	73	72	68	94	84	84	77	77	72	71	67	87	80	79	74	73	70	68	66	81	77	75	72	70	68	66	64	64	61				
2.00	105	91	95	85	88	80	82	76	101	89	92	83	85	79	80	75	93	85	87	80	81	76	77	73	87	82	81	78	77	74	73	71	70	68				
2.50	109	94	101	89	94	85	88	81	105	92	97	87	91	83	86	80	97	88	91	84	86	81	82	78	90	85	86	81	82	78	78	76	75	72				
3.00	112	96	105	92	99	88	94	85	108	94	101	90	96	87	91	83	100	90	94	87	90	84	86	81	92	87	88	84	85	81	82	79	78	75				
4.00	117	99	110	96	105	92	101	90	112	97	106	94	102	91	98	88	103	93	99	90	95	88	92	86	95	89	92	87	89	85	87	83	82	79				
5.00	119	101	114	98	109	95	105	93	114	99	109	96	106	94	102	91	105	95	101	92	98	90	96	89	97	91	94	89	92	88	90	86	85	82				
7.00	122	103	118	100	115	98	111	96	117	100	113	99	110	97	107	95	107	97	105	95	102	93	100	92	99	93	97	92	95	90	94	89	88	85				
10.00	124	104	121	102	119	101	116	99	119	102	116	100	114	99	112	98	109	98	107	97	105	96	104	95	101	94	99	93	98	92	97	92	90	87				

JIS C 8030:2014

三菱電機照明株式会社