
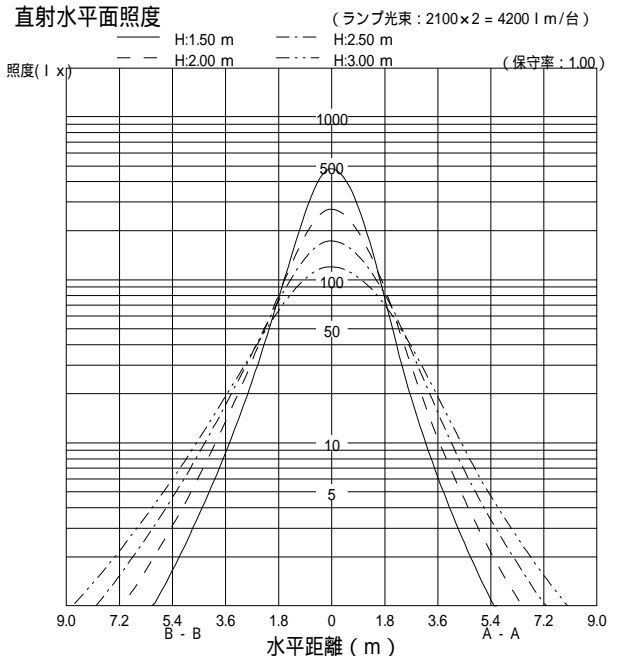


諸特性

光源		FHF16EX-N-H					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	2.05	2.74	3.42	4.10		
	B-B	1.96	2.55	3.19	3.82		
器具効率		上方光束	下方光束	計			
		0.0%	74.6%	74.6%			
保守率		良い	0.730	普通	0.690	悪い	0.610

配光曲線図 (cd/1000lm)

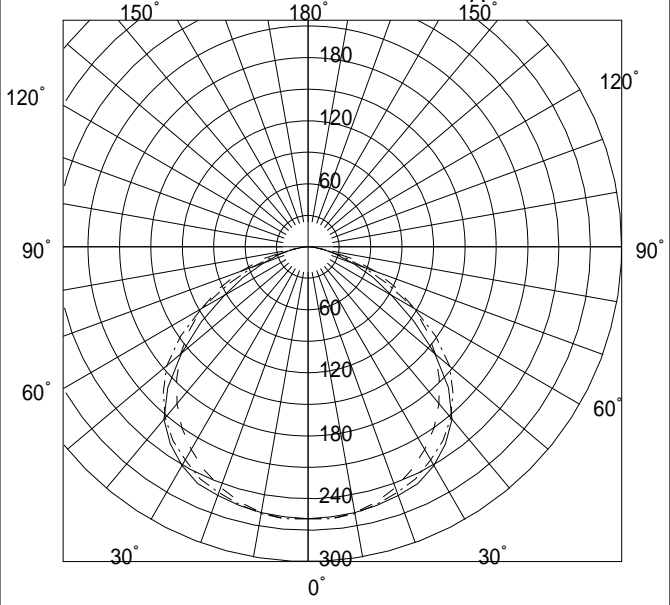

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	34	47	55	62	68	72	78	82	84	88	90	92	94
		10	32	44	50	56	61	64	68	71	72	75	76	77	78
	50	30	24	37	44	52	59	63	70	75	78	83	86	89	92
		10	23	35	42	48	54	57	63	66	69	72	74	76	77
70	30	30	18	30	37	44	52	56	64	70	73	78	82	86	89
		10	18	29	36	42	49	52	58	63	65	69	71	74	76
	70	30	33	46	54	60	66	70	75	79	81	85	86	89	90
		10	31	43	49	55	60	63	67	70	71	74	75	76	78
50	50	30	24	36	44	51	57	62	68	73	76	80	83	86	88
		10	23	34	41	47	53	57	62	66	68	71	73	75	76
	30	30	18	30	37	44	51	56	63	68	72	76	80	83	86
		10	18	29	36	42	48	52	58	62	65	68	71	73	75
30	10	10	15	25	32	38	44	48	55	59	62	66	69	72	74
	50	30	23	35	42	49	55	59	65	69	72	76	78	81	83
		10	22	34	40	46	52	55	60	64	66	69	71	73	75
	30	30	18	29	36	43	50	54	60	65	68	73	75	79	81
0	10	10	15	25	31	38	44	48	54	58	61	65	68	71	73
	30	30	18	29	35	42	48	52	58	63	65	69	71	74	76
0	0	0	13	24	30	36	42	46	52	56	59	62	65	67	69