



YB2062F

L2842A

PT




配光曲線図 (cd/1000lm)

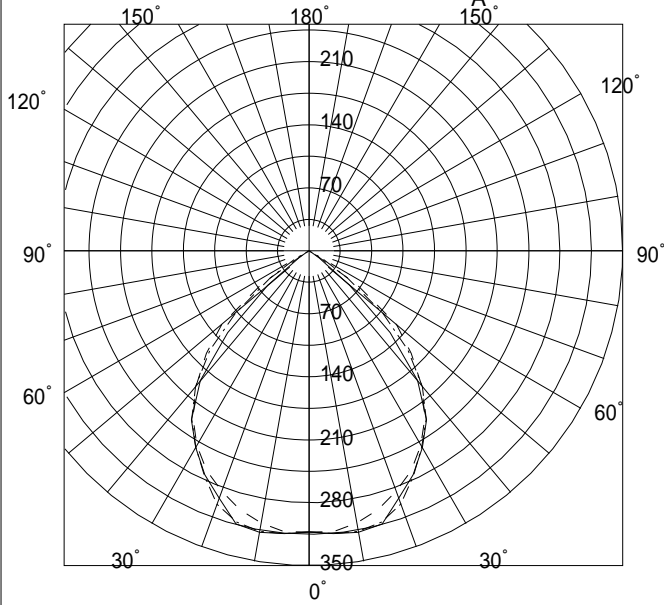

諸特性

光源		FHF16EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.80	2.40	3.00	3.60	
	B-B	1.83	2.38	2.97	3.57	
器具効率		上方光束		下方光束		計
		0.0%		54.7%		54.7%
保守率		良い	0.730	普通	0.690	悪い 0.610

直射水平面照度

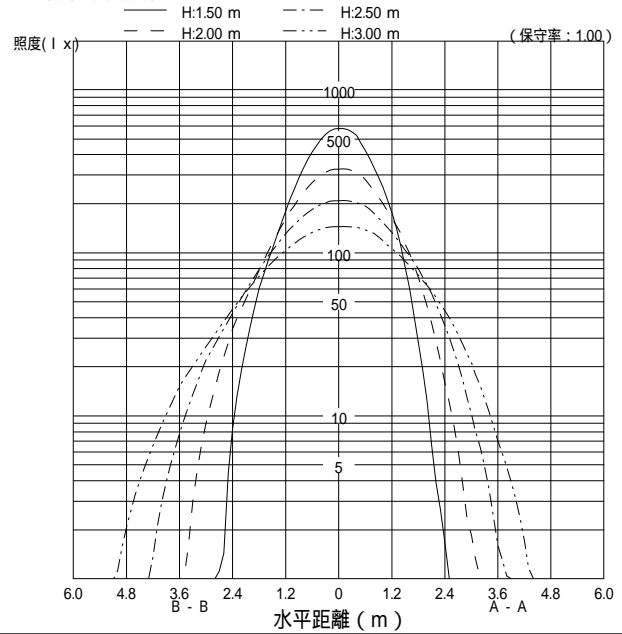

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	30	42	47	52	56	58	61	64	65	66	67	69	69
		10	28	38	43	46	50	51	53	55	56	56	57	58	58
	50	30	24	35	40	45	51	53	57	60	61	64	65	67	68
		10	23	33	38	42	46	48	51	53	54	55	56	57	57
	30	30	20	31	36	41	47	49	53	57	59	61	63	65	67
70		10	20	30	35	39	44	46	49	51	52	54	55	56	57
	10	10	17	28	32	37	42	44	47	50	51	53	54	55	56
	70	30	30	41	46	50	54	56	59	62	63	64	65	66	67
		10	28	38	42	46	49	50	53	54	55	56	56	57	57
	50	30	23	35	40	45	50	52	56	58	60	62	63	65	66
50		10	23	33	37	42	46	48	50	52	53	55	55	56	57
	30	30	20	31	36	41	46	48	52	56	57	60	61	63	65
		10	19	30	34	39	44	45	48	51	52	53	54	55	56
	10	10	17	28	32	37	42	43	47	49	51	52	53	55	56
	50	30	23	34	39	43	48	50	53	56	57	58	60	61	62
30		10	22	33	37	41	45	47	49	51	52	53	54	55	56
	30	30	20	31	35	40	45	47	51	53	55	57	58	60	61
		10	19	30	34	39	43	45	48	50	51	53	53	54	55
0	30	30	19	30	35	39	44	46	49	51	53	54	55	56	57
		10	19	30	34	38	43	44	47	49	50	52	53	53	54
0	0	0	17	27	31	36	40	42	45	47	48	50	51	52	52