
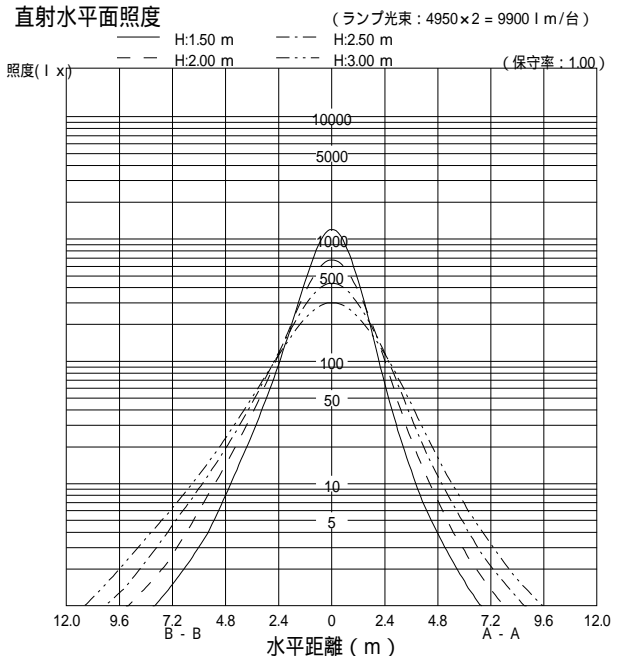


諸特性

光源		FHF32EX-N-H					
最大取付間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	2.02	2.65	3.30	3.94		
	B-B	2.20	2.74	3.35	3.96		
器具効率		上方光束	下方光束	計			
		0.0%	77.6%	77.6%			
保守率		良い	0.730	普通	0.690	悪い	0.610

配光曲線図 (cd/1000lm)

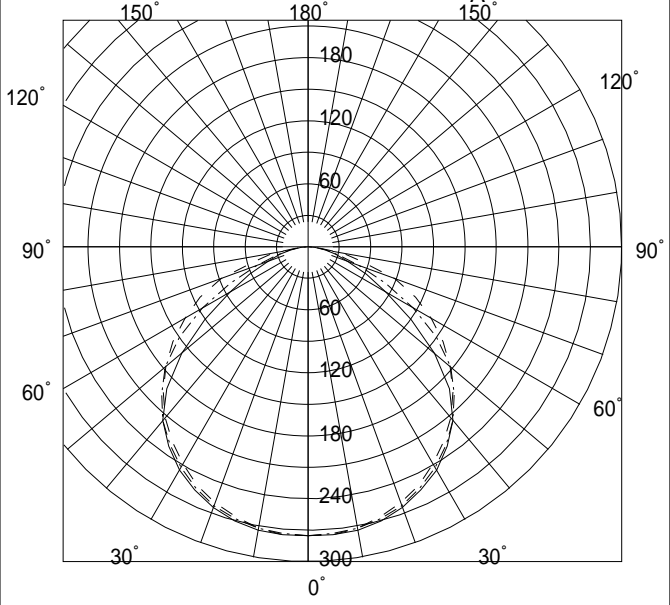

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	36	49	58	65	71	75	81	85	88	91	93	96	97	
		10	33	45	52	58	63	66	71	74	75	77	79	80	82	
	50	30	25	38	46	54	61	66	73	78	81	86	89	92	95	
		10	24	36	43	50	56	60	65	69	71	74	76	79	80	
70	30	30	19	31	39	46	54	59	66	72	76	81	85	89	93	
		10	19	30	37	44	51	55	61	65	68	72	74	77	79	
	10	10	15	26	33	40	46	50	57	62	65	69	72	75	78	
		70	30	35	48	56	63	69	73	78	82	85	88	90	92	94
50		10	33	44	51	57	62	65	69	72	74	76	78	79	81	
	50	30	25	38	45	53	60	64	71	76	79	83	86	89	92	
		10	24	36	43	49	55	59	64	68	70	74	75	78	79	
	30	30	19	31	39	46	53	58	65	71	74	79	83	87	90	
30		10	19	30	37	44	50	54	60	65	67	71	73	76	78	
	10	10	15	26	33	39	46	50	57	61	64	69	71	74	77	
	50	30	24	36	44	51	57	61	68	72	75	78	81	84	86	
		10	23	35	42	48	54	57	63	67	69	72	74	76	78	
0	30	30	19	30	37	43	50	54	60	65	68	72	74	77	79	
		10	18	30	36	42	49	52	58	62	65	68	71	73	75	
	10	10	15	26	33	39	46	49	55	60	63	67	69	72	74	
0	0	0	14	25	31	37	44	48	54	58	61	65	67	70	72	