



YB4182F

VPH




配光曲線図 (cd/1000lm)

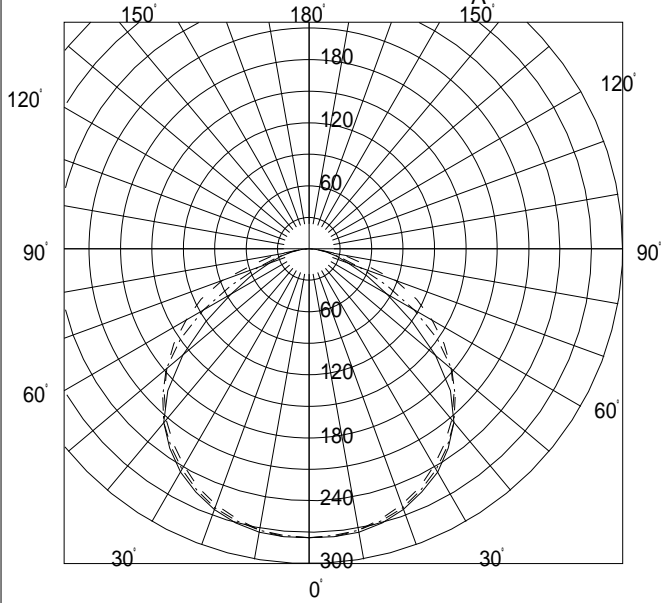

諸特性

光源		FHF32EX-N			
最大取付間隔		A-A		B-B	
		1.37H		1.69H	
器具 効率	上方光束	0.0%			
	下方光束	77.6%			
	計	77.6%			
保守率		良	0.740	中	0.700 否 0.620

直射水平面照度

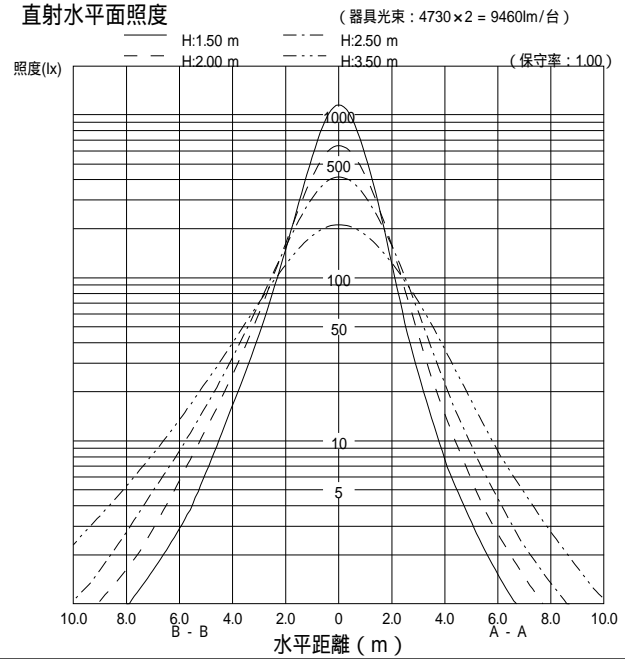

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	35	49	57	64	71	75	81	85	87	91	93	95	97
		10	33	45	52	57	63	66	70	73	75	77	78	80	81
	50	30	25	38	46	53	61	65	72	78	81	85	88	92	95
		10	24	36	43	49	56	59	65	69	71	74	76	78	80
70	30	30	19	31	38	46	53	58	66	72	76	81	84	89	92
		10	18	30	37	43	50	54	60	65	67	71	73	76	78
	10	10	15	26	32	39	46	50	56	61	64	69	71	75	77
	70	30	34	47	55	62	68	72	78	82	84	87	89	92	93
50		10	32	44	51	56	62	65	69	72	74	76	77	79	80
	50	30	24	37	45	52	59	64	71	75	79	83	86	89	91
		10	23	35	42	49	55	58	64	68	70	73	75	77	79
	30	30	19	31	38	45	53	57	65	70	74	79	82	86	89
30		10	18	30	37	43	50	54	60	64	67	70	73	75	78
	10	10	15	26	32	39	46	50	56	61	64	68	71	74	76
	50	30	24	36	43	50	57	61	67	71	74	78	80	83	85
		10	23	34	41	47	53	57	62	66	68	71	73	75	77
0	30	30	18	30	36	43	50	54	60	65	67	71	74	77	79
	10	10	18	29	36	42	48	52	58	62	64	68	70	73	75
0	0	0	14	24	30	37	43	47	53	58	60	64	66	69	71