



YBH4002AF

L45202

VPN




配光曲線図 (cd/1000lm)

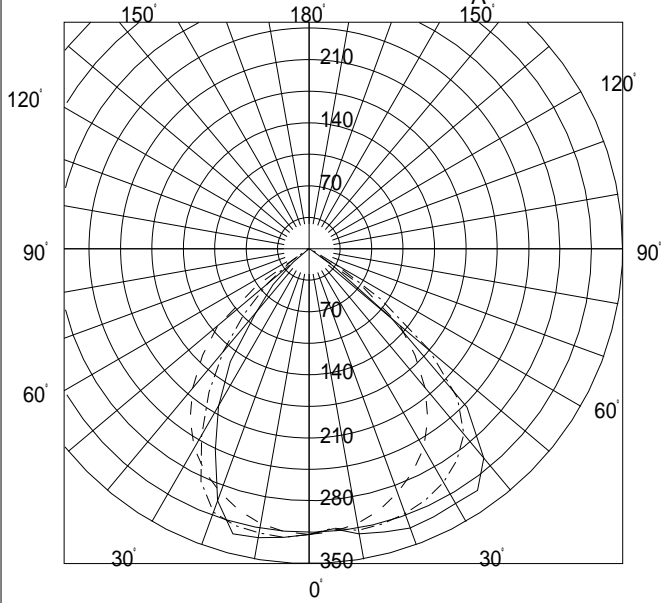

諸特性

光源		FHF32EX-N-H(非常灯)			
最大取付間隔		A-A 1.31H		B-B 1.57H	
器具 効率	上方光束	0.0%			
	下方光束	58.0%			
	計	58.0%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

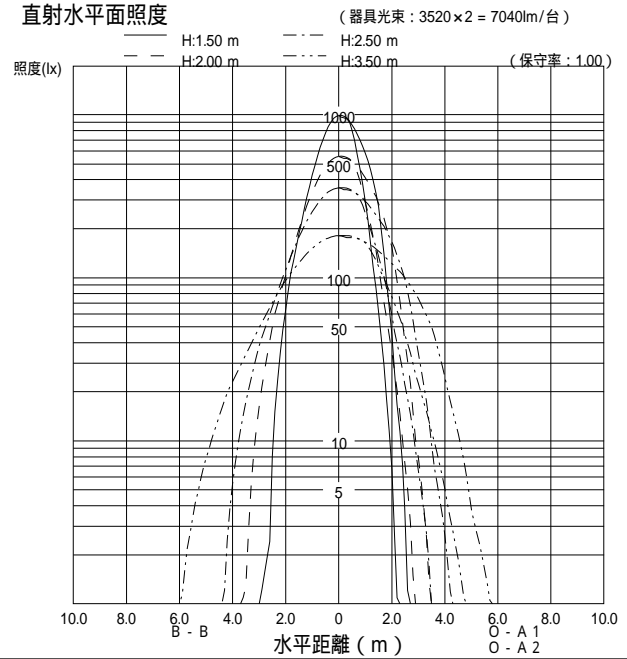

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	31	43	49	54	59	61	64	67	68	70	71	72	73
		10	29	40	44	48	52	54	56	57	58	59	60	61	61
	50	30	24	36	42	47	53	55	60	63	64	67	68	70	72
		10	23	34	39	44	48	50	53	55	56	58	59	60	60
70	30	30	20	32	37	43	49	51	56	59	61	64	66	68	70
		10	20	31	36	41	46	48	51	53	55	56	58	59	60
	70	30	31	42	48	52	57	59	62	65	66	67	68	70	70
		10	29	39	44	48	51	53	55	57	58	59	59	60	60
50	50	30	24	36	41	47	52	54	58	61	63	65	66	68	69
		10	23	34	39	43	48	50	53	55	56	57	58	59	60
	30	30	20	32	37	42	48	50	55	58	60	63	64	66	68
		10	20	31	36	40	45	47	51	53	54	56	57	58	59
30	50	30	23	35	40	45	50	52	56	58	60	61	62	64	65
		10	23	34	38	43	47	49	52	54	55	56	57	58	58
	30	30	20	31	36	42	47	49	53	56	57	60	61	63	64
		10	20	31	35	40	45	47	50	52	53	55	56	57	58
0	30	30	20	31	36	41	46	48	51	54	55	57	58	59	60
		10	19	30	35	40	44	46	49	52	53	54	55	56	57
0	0	0	17	28	32	37	42	43	47	49	50	52	53	54	55